

AD-A120 201

DELTA INFORMATION SYSTEMS INC JENKINTOWN PA
DEVELOPMENT OF A SYSTEM TO VALIDATE GROUP 3 FACSIMILE EQUIPMENT--ETC(U)
JUL 82

F/G 17/2


DCA100-81-C-0023

UNCLASSIFIED

NCS-TIB-82-4

NL

1 of 2
AD A
120201

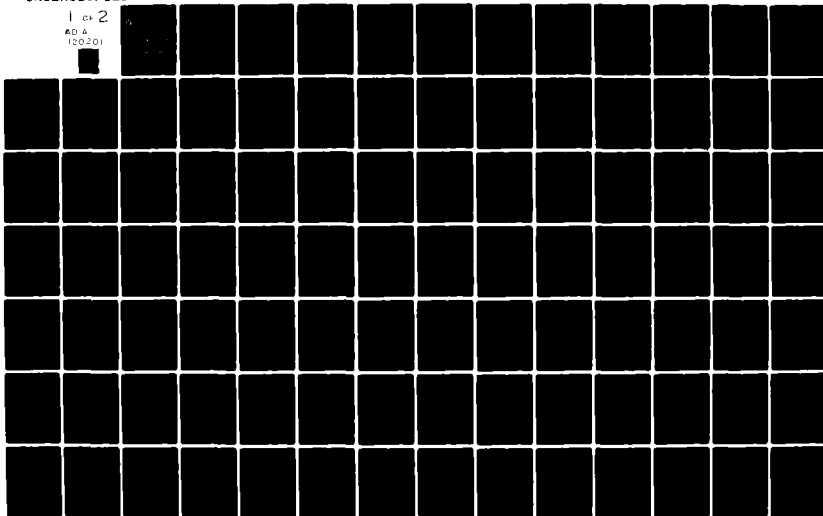

AD A120201

②

NCS TIB 82-4



NATIONAL COMMUNICATIONS SYSTEM

TECHNICAL INFORMATION BULLETIN


82-4

DEVELOPMENT OF A SYSTEM

TO VALIDATE GROUP 3

FACSIMILE EQUIPMENT

JULY 1982



E

APPROVED FOR PUBLIC RELEASE
DISTRIBUTION UNLIMITED

82 10 12 249

NOT A COPY

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NCS TIB 82-4	2. GOVT ACCESSION NO. AD-A120201	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Development of a System to Validate Group 3 Facsimile Equipment		5. TYPE OF REPORT & PERIOD COVERED FINAL
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(s) DCA100-81-C-0023
9. PERFORMING ORGANIZATION NAME AND ADDRESS Delta Information Systems, Inc. 310 Cottman Street Jenkintown, PA 19046		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS National Communications System Office of Technology and Standards Washington, DC 20305		12. REPORT DATE JULY 30, 1982
		13. NUMBER OF PAGES 160
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Facsimile Data Compression Group 3 Modified Read Code Validation Test Set Modified Huffman Code		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The objective of this program is to develop a system to validate Group 3 facsimile equipment as specified in Federal Standard 1062 and 1063. (The Federal standards incorporate Electronic Industry Standards, EIA RS-465 and RS-466 respectively). The program consists of two phases. In Phase I the methodology for the validation of Group 3 facsimile equipment was developed (See NCS TIB 81-8 AD-A107762). In Phase II the Validation methodology, developed in Phase I, was implemented and tested. This Technical Information Bulletin describes the Phase II effort.		

NCS TECHNICAL INFORMATION BULLETIN 82-4

DEVELOPMENT OF A SYSTEM TO VALIDATE

GROUP 3 FACSIMILE EQUIPMENT

JULY 1982

PROJECT OFFICER

DENNIS BODSON
Senior Electronics Engineer
Office of NCS Technology
and Standards

APPROVED FOR PUBLICATION:

Marshall L. Cain

MARSHALL L. CAIN
Assistant Manager
Office of Technology
and Standards

FOREWORD

Among the responsibilities assigned to the Office of the Manager, National Communications System, is the management of the Federal Telecommunication Standards Program. Under this program, the NCS, with the assistance of the Federal Telecommunication Standards Committee identifies, develops, and coordinates proposed Federal Standards which either contribute to the interoperability of functionally similar Federal telecommunication systems or to the achievement of a compatible and efficient interface between computer and telecommunication systems. In developing and coordinating these standards a considerable amount of effort is expended in initiating and pursuing joint standards development efforts with appropriate technical committees of the Electronic Industries Association, the American National Standards Institute, the International Organization for Standardization, and the International Telegraph and Telephone Consultative Committee of the International Telecommunication Union. This Technical Information Bulletin presents an overview of an effort which is contributing to the development of compatible Federal, national, and international standards in the area of digital facsimile standards. It has been prepared to inform interested Federal activities of the progress of these efforts. Any comments, inputs or statements of requirements which could assist in the advancement of this work are welcome and should be addressed to:

Office of the Manager
National Communications System
ATTN: NCS-TS
Washington, D.C. 20305
(202) 692-2124

DEVELOPMENT OF A SYSTEM
TO VALIDATE GROUP 3
FACSIMILE EQUIPMENT

Final Report

Submitted To:

NATIONAL COMMUNICATIONS SYSTEM
Office of Technology and Standards
Washington, D.C. 20305

Contracting Agency:

DEFENSE COMMUNICATIONS AGENCY

Contract Number

DCA100-81-C-0023


July 30, 1982

Submitted By:

DELTA INFORMATION SYSTEMS, INC.

310 Cottman Street

Jenkintown, Pennsylvania 19046



Accession For	
NTIS STAFF	<input checked="" type="checkbox"/>
DTIC STAFF	<input type="checkbox"/>
Unpublished	<input type="checkbox"/>
Journal Article	<input type="checkbox"/>
By _____	
Digitized by _____	
Availability Codes	
Dist _____	_____
A	

Table of Contents

1.0	Introduction	1-1
2.0	System Design	2-1
2.1	System Operation	2-3
2.2	Versatec V80 Printer/Plotter	2-4
2.3	EXORDisk III	2-5
2.4	DEC LA120 Printing Terminal	2-6
3.0	Hardware Design	3-1
3.1	Control Logic	3-1
4.0	Software Design	4-1
4.1	Initialize	4-3
4.2	Executive	4-3
4.3	Timer	4-3
4.4	Command Processors	4-3
4.5	Interrupt Polling	4-3
4.6	Group 3 Protocol Control/State Control Tables	4-3
4.7	Print Control/Data Tables	4-4
4.8	Keyboard Control/Command Tables	4-4
4.9	HDLC Control	4-4
4.10	FAX Control/DISC Access Control	4-4
4.11	FAX Print Control/FAX Decompress	4-4
5.0	Operator Interface	5-1
5.1	Keyboard Commands	5-1
5.2	Test Parameters	5-5

6.0	Test Procedure	6-1
6.1	Test Configuration	6-1
6.2	Hardware Initialization	6-1
6.3	Program Initialization	6-3
6.4	Preliminary Test Operations	6-4
6.5	Test Execution	6-6
7.0	Acceptance Test	7-1
7.1	Initial Operations	7-2
7.2	Test 1 (Errors disabled)	7-2
7.3	Test 1 (Errors enabled)	7-4
7.4	Test 2 (No operator intervention at UUT)	7-4
7.5	Test 2 (Operator intervention at UUT)	7-5
7.6	Test 3	7-5
7.7	Test 4 (normal error operation)	7-5
7.8	Test 4 (no document at UUT)	7-6
7.9	Test 4 (polling the UUT from a 2400 bit machine)	7-6
7.10	Test 4 (9600 BPS signaling rate with one FTT response)	7-7
7.11	Test 4 (7200 BPS with constant FTT responses)	7-7
7.12	Test 4 (minimum scan line times set to 0 ms and 40 ms)	7-7
7.13	Test 5	7-8
7.14	Test 6	7-8
7.15	Test 7	7-9
7.16	Test 8	7-9
7.17	Test 9	7-9
7.18	Test A	7-10
7.19	Test 1 (Modified Read coding)	7-10
7.20	Test 2 (Modified Read coding)	7-10

1.0 INTRODUCTION

This document summarizes work performed by Delta Information Systems, Inc. for the office of Technology and Standards of the National Communications System, an organization of the U.S. Government, under Phase II of contract number DCA100-81-C-0023. The work performed on Phase I was described in a separate final report dated July 27, 1981 (NCS Technical Information Bulletin 81-8).

The Office of Technology and Standards, headed by National Communications System Assistant Manager Marshall L. Cain, is responsible for the management of the Federal Telecommunications Standards Program, which develops telecommunication standards whose use is mandatory by all Federal agencies.

The objective of this program is to develop a system to validate Group 3 facsimile equipment as specified in Federal Standards 1062 and 1063. (The Federal standards incorporate Electronic Industry Standards, EIA RS-465 and RS-466 respectively). The program consists of two phases. In Phase I the methodology for the validation of Group 3 facsimile equipment was developed. In Phase II the validation methodology, developed in Phase I, was implemented and tested.

Section 2.0 describes the general design of the overall Validation System indicating that it is composed of four

major hardware components

- Microprocessor System Controller.
- Floppy disk.
- Versatec V80 Printer, and
- DEC LA120 Keyboard Printer.

The heart of the system is the controller. Sections 3.0 and 4.0 describe the hardware and software design of the controller respectively. The operator interface including keyboard commands and test parameters is described in Section 5.0. The procedure for using the Validation System is outlined in Section 6.0. Finally the results of the acceptance test are summarized in detail in section 7.0.

2. SYSTEM DESIGN

The Group 3 Facsimile Validation equipment is implemented using the Motorola EXORciser II M6809 development system with additional Motorola M68 series micromodules and compatible DIS designed boards which contain a Rockwell V96P/1 modem and associated interface logic.

A Motorola EXORDisk III double sided dual drive floppy disk provides approximately one million bytes of on-line storage for system software and compressed test documents. A DEC LA120 medium speed printing terminal provides operator control of the test process and a printed record of test results. A Versatec V80 plotter provides hard copy of facsimile documents received from the unit under test. Connection to the unit under test is made via the switched telephone network through an exclusion key telephone.

A block diagram of the Group III Facsimile Validation system is shown in Figure 2-1.

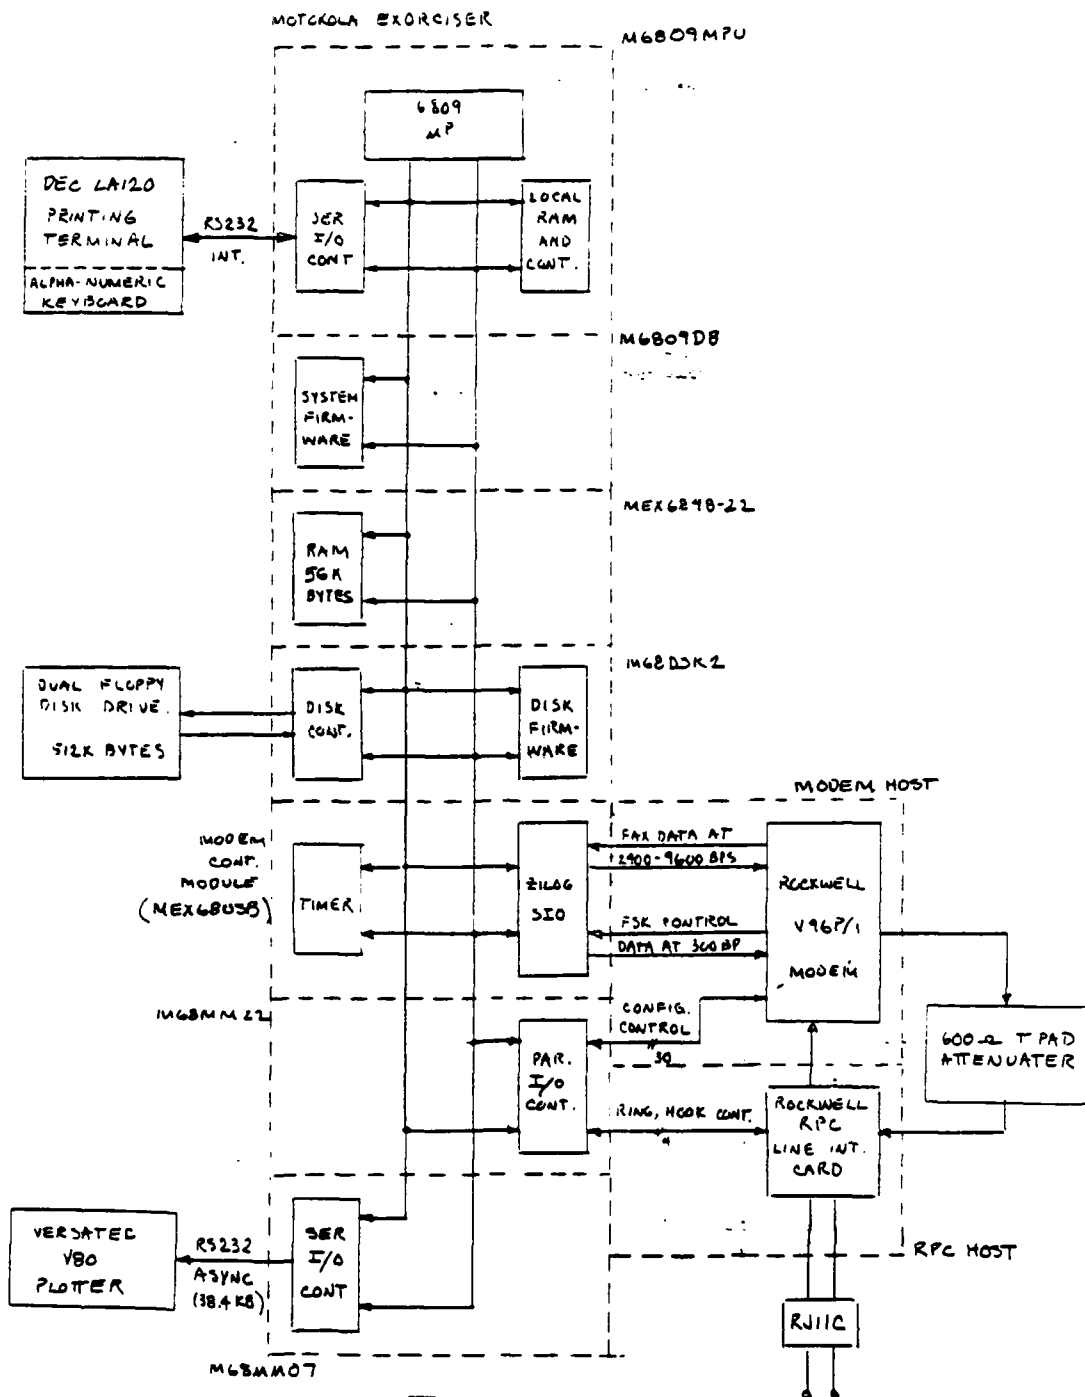


Figure 2-1

Facsimile Validation Block Diagram

TO OUT VIA
SWITCHED
TELEPHONE
NETWORK

2.1 SYSTEM OPERATION

The Group 3 Validation software and the Motorola MDOS programs necessary to load and run it are resident on one floppy disk (FAXVAL) which is inserted in disk drive #0. Compressed facsimile test documents for transmission to the unit under test are contained in a floppy disk (FAXDOC) which is inserted in disk drive #1. The disk in drive #1 (FAXDOC) also provides storage space for documents received from the unit under test.

The test operator inserts these two disks in the disk drive and initializes the system from the printing terminal by transferring the control program from disk #0 (FAXVAL) to system RAM for execution by the microprocessor on the EXORciser II MPU module. The operator has 10 tests available to him, and he can modify the operating parameters and test error conditions in these to accomodate the characteristics of the unit under test. Upon completion of each test, UUT identifying data, test conditions, and test results are automatically printed at the DEC terminal.

Facsimile data received and stored on disk #1 (FAXDOC) can be decoded and transferred through an asynchronous serial interface to the Versatec V80 plotter for visual evaluation of document quality.

2.2 VERSATEC V80 PRINTER/PLOTTER

The Versatec V80 Printer/Plotter is an electrostatic hard copy device which can perform both printing and plotting operations for data received on either an 8-bit parallel or an asynchronous serial interface.

The Facsimile Validation equipment uses the V80 in plot mode only, with data transferred via the serial interface at 38.4 baud with 8 data bits, one start bit, and one stop bit.

The V80 plots a fixed 2112 nibs/line (200 nibs/inch on 11 inch wide paper). Vertical resolution is 200 lines/inch. All facsimile documents printed on the V80 use this format. Those which have fewer than 2112 elements per line will have white fill elements printed at the end of each line; those which have more than 2112 bits per line will be truncated, with the information on the right hand side of the document lost. Neither of these conditions should affect the function of the printout, which is facsimile quality evaluation.

The fixed vertical resolution causes facsimile documents received at 7.7 lines/mm to have a normal aspect ratio and those received at 3.85 lines/mm to appear compressed 2.1 vertically.

2.3 EXORDisk III

The Motorola EXORDisk III is a dual double-sided floppy disk drive capable of storing 512,512 bytes of IBM 3740 formatted data per disk.

Two individually selectable disk drives, a power supply , and a cooling fan are contained in a single housing. The disks interface to the system through a M68DSK2 board inserted in the EXORciser II card cage.

2.4 DEC LA120 PRINTING TERMINAL

The DEC LA120 printing terminal provides operator control of Facsimile Validation operation and a hard copy printout of test results. It contains a full ASCII keyboard with standard ANSI escape sequences. The LA120 communicates with the EXORciser II through an EIA RS-232 compatible serial asynchronous interface operating at 1200 baud. It prints 120 characters per line.

3.0 HARDWARE DESIGN

3.1 CONTROL LOGIC

The system control logic is contained on 9 printed circuit cards in the Motorola EXORciser II chassis. Operation is controlled by a 6809 microprocessor on the MPU board, which interconnects to the memory, support logic and I/O devices on the other boards through the Motorola Dynamic System Bus via the card cage backpan wiring. The backpan wiring is universal, and all card slots are electrically equivalent. The chassis contains +5VDC and \pm 12VDC power supplies.

3.1.1 MOTOROLA M6809MPU PROCESSOR MODULE

The M6809MPU module contains an MC68B09 microprocessor, support hardware, and bus interface drivers. The microprocessor executes the Group 3 Facsimile Validation program from the 64K RAM memory described in 3.1.3 below. It operates at a 2.0 MHZ clock rate in single page memory mode.

A block diagram of the M6809MPU module is shown in Figure 3-1.

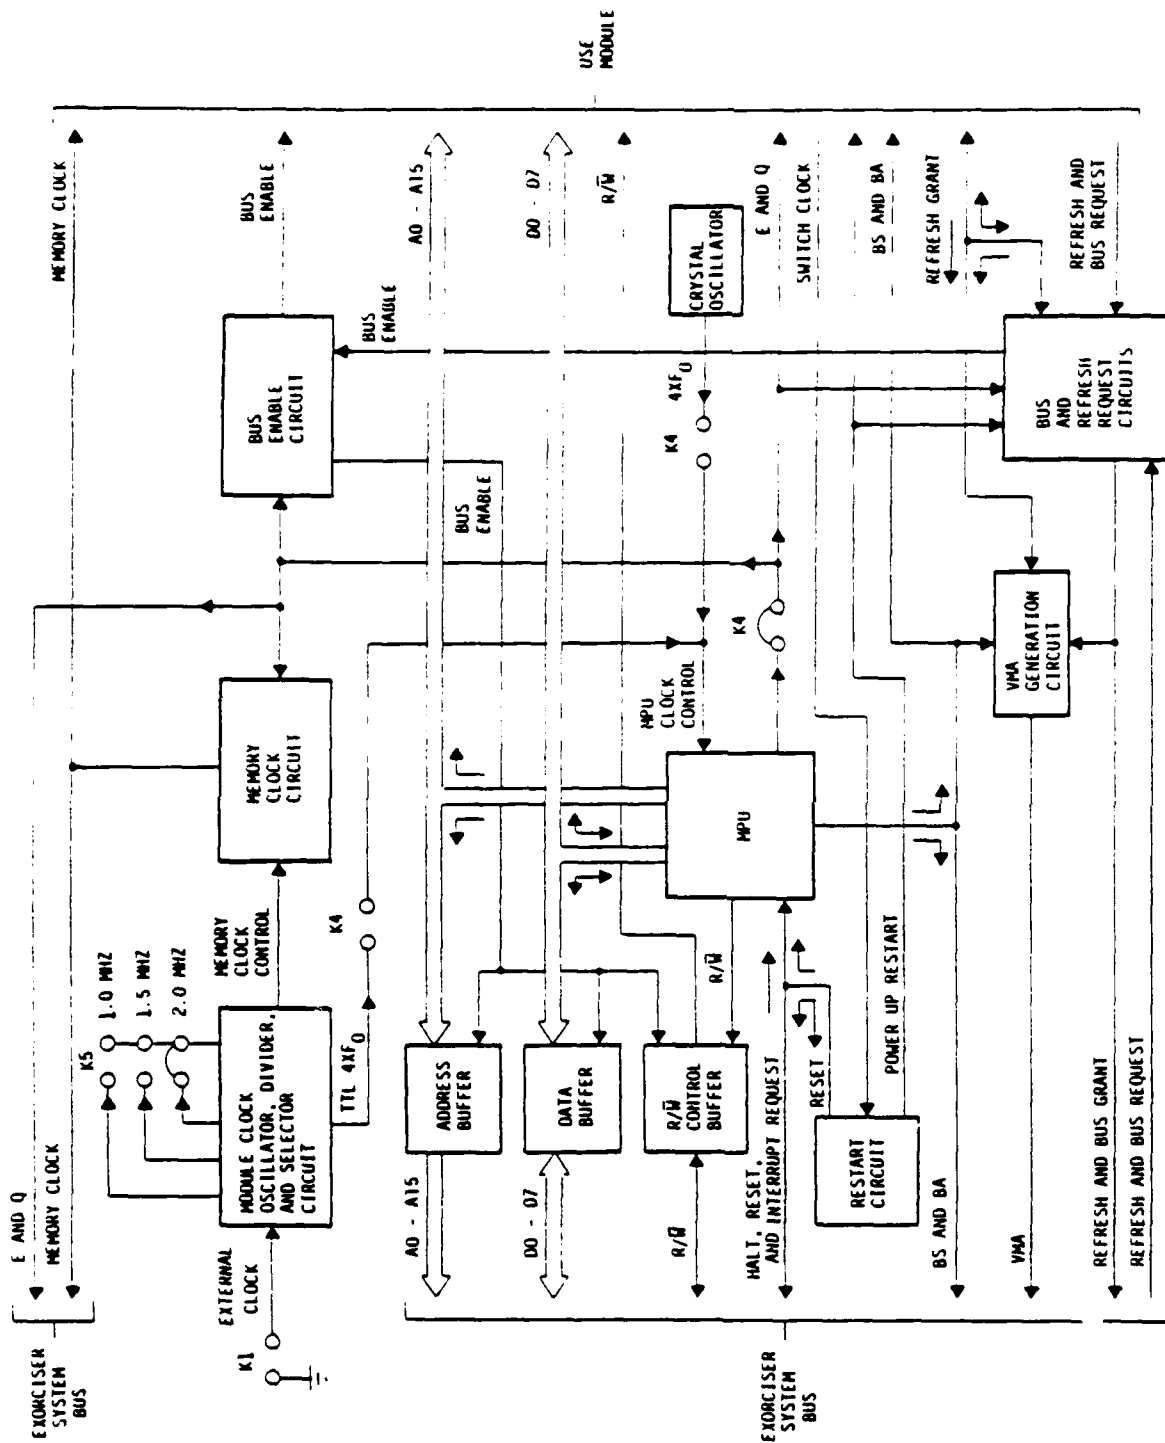


FIGURE 3-1. MPU Module, Block Diagram

3.1.2 MOTOROLA M6809DB DEBUG MODULE

The M6809DB module contains the RS232 asynchronous serial interface to the DEC LA120 printing terminal, memory control logic, and EXbug firmware. It is configured in the following manner:

- (a) SW1 set to single page memory mode
- (b) SW2 set to SYNC mode
- (c) SW3 set to EXBG restart mode.

A block diagram of the M6809DB module is shown in Figure 3-2.

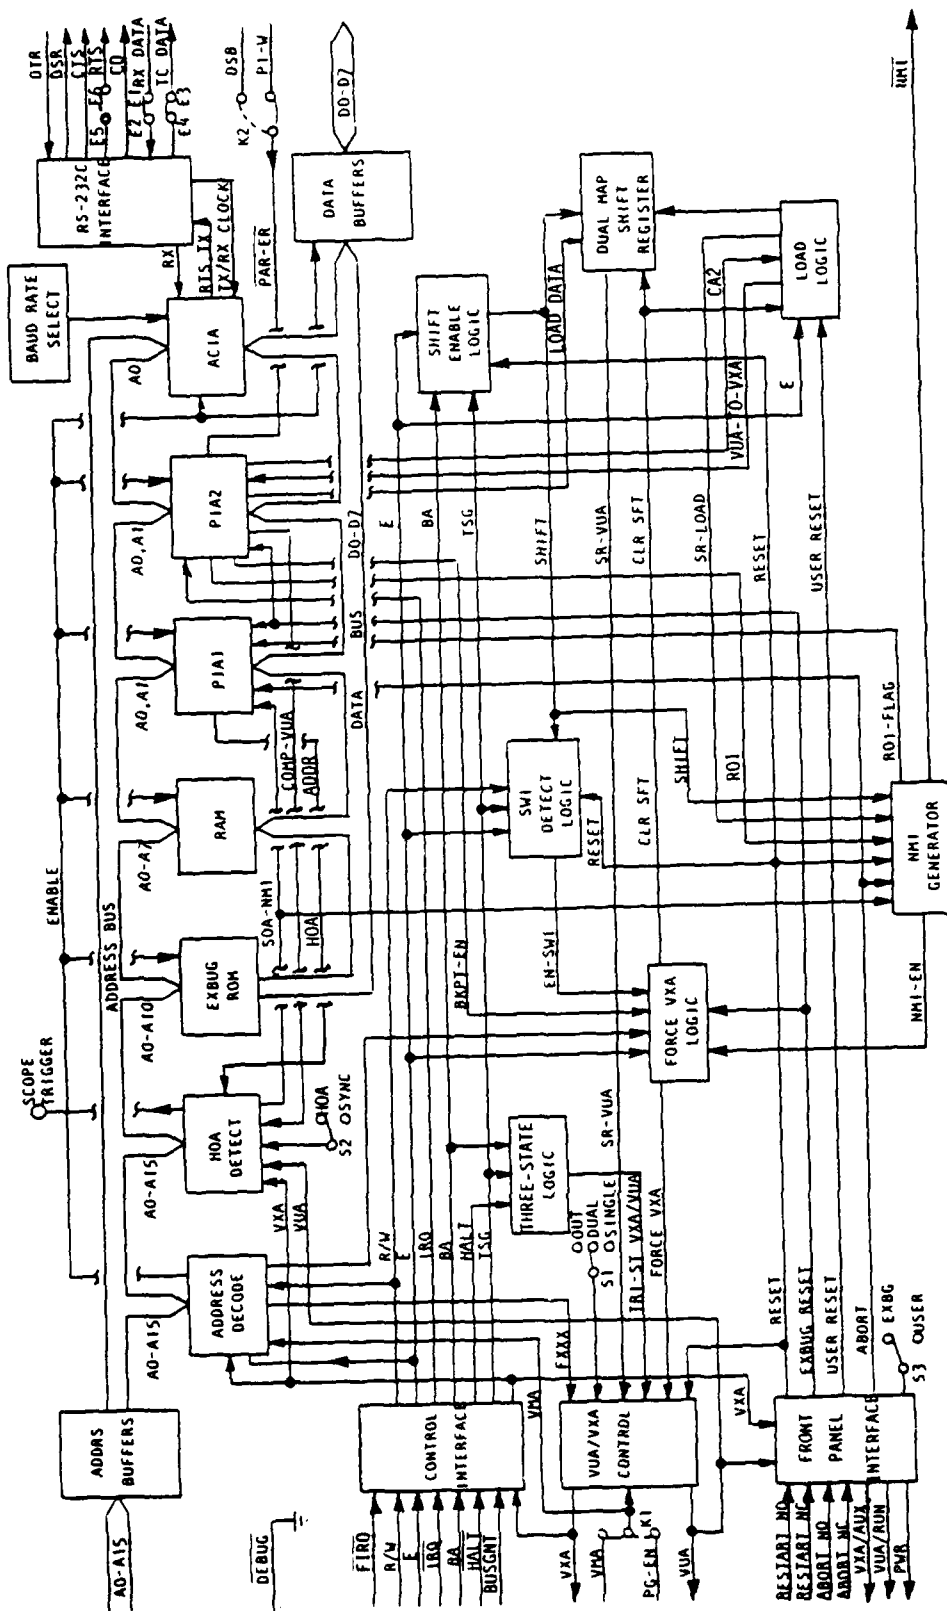


FIGURE 3-2 ME809 Debug Block Diagram

3.1.3 MOTOROLA MEX6864-22 DYNAMIC RAM Module

The MEX6864-22 module provides up to 65,536 x 8-bits of system RAM memory. It has been modified to provide 56K 8-bit bytes of RAM at hex addresses \$0000 through \$DFFF, leaving addresses \$E000 through \$FFFF free for ~~t/c~~ various hardware devices.

The module is configured for VUA addressing (address enable jumper at position 1-2) and for 2.0 MHZ operation with no parity check.

The FAX VAL program is loaded from disk #0 to RAM addresses \$2000 through \$7FFF for execution. Addresses \$8000 through \$CF00 are allocated for transmit and receive facsimile data, and address \$D000 through \$DFFF to the Versatec V80 print buffer and to microprocessor stack FIFOs.

A block diagram of the MEX6864-22 module is shown in Figure 3-3.

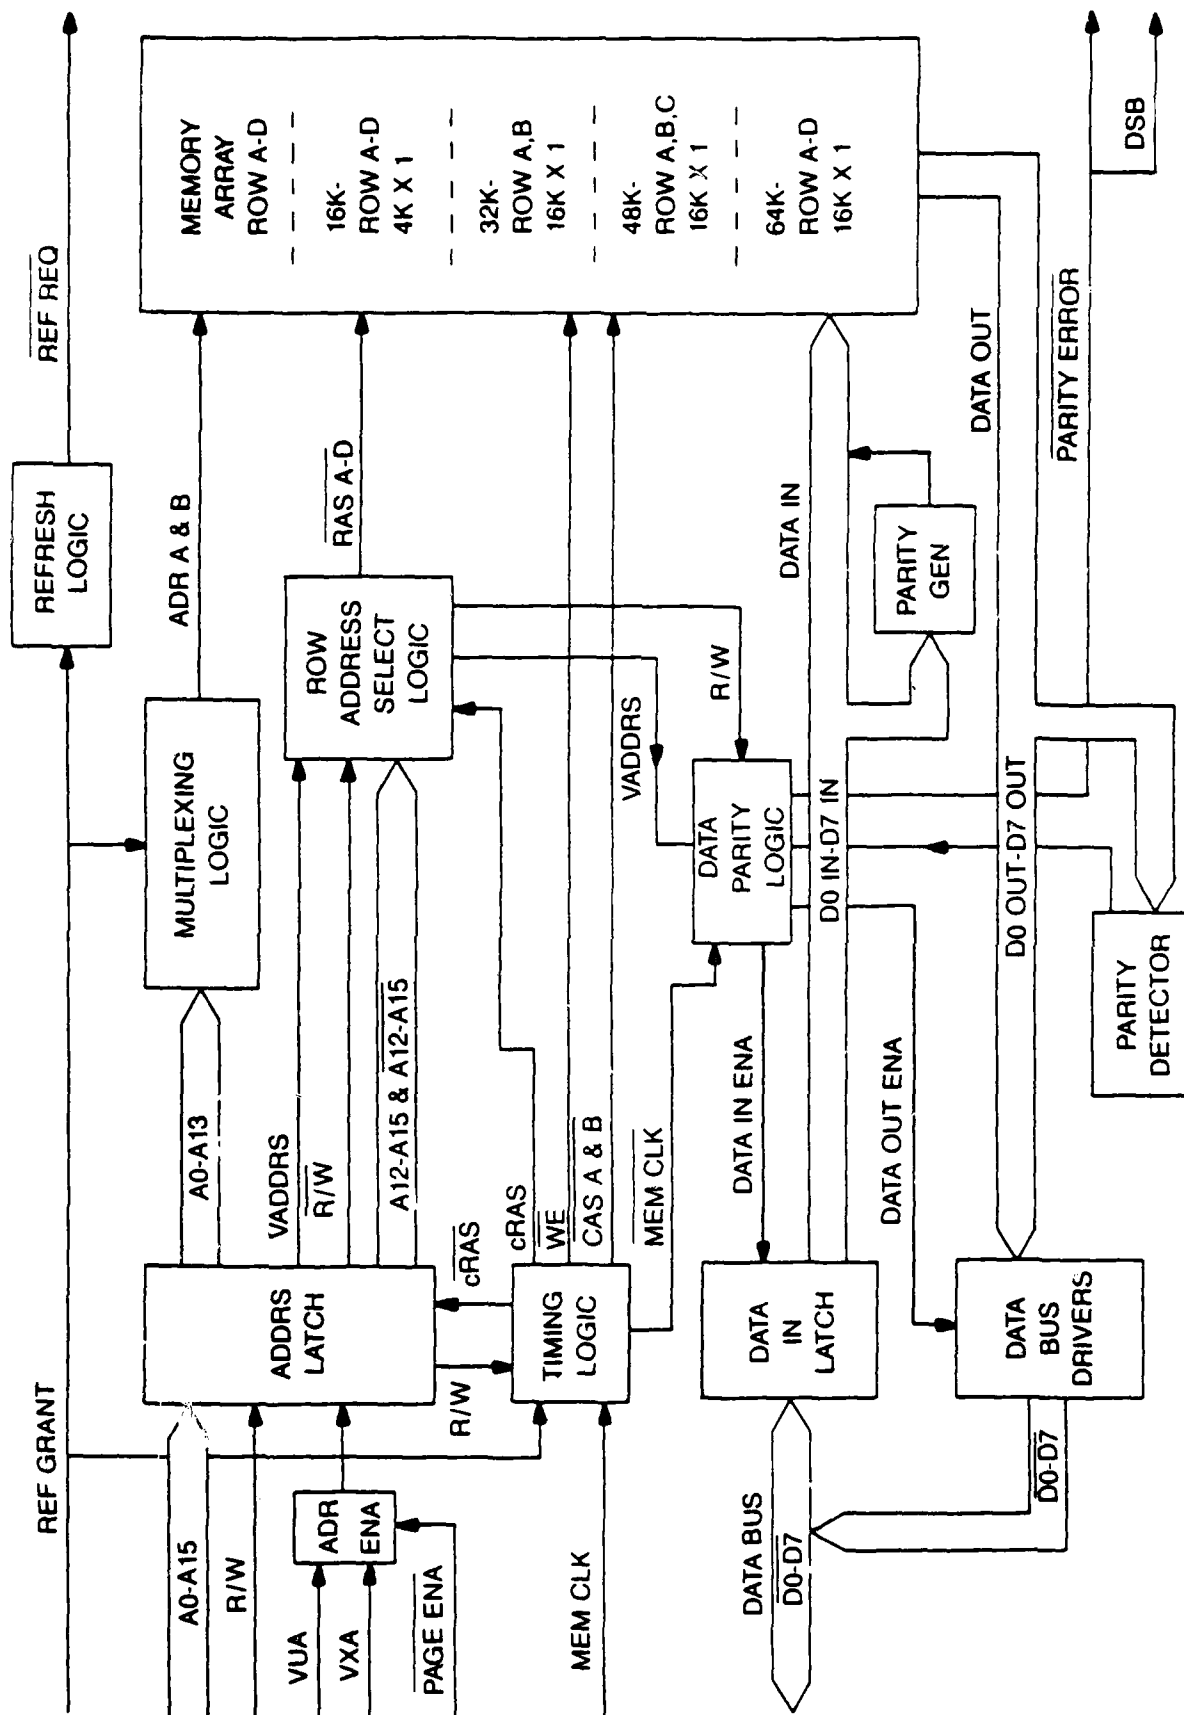


Figure 3-3. Dynamic RAM Block Diagram

3.1.4 MOTOROLA M68MM22 QUAD PARALLEL INTERFACE MODULE

The M68MM22 module consists of eight 8-bit parallel I/O ports implemented with four MC6841 PIO devices. These parallel interface lines are used primarily to control the Rockwell V96P/1 modem (refer to 3.1.8 below). The modem interface signals are detailed in figure 3-11.

The module is configured for VUA addressing with device addresses listed below:

<u>Port</u>	<u>Address</u>	<u>I/O Configuration</u>
1	\$EF10	output
2	\$EF11	output
3	\$EF14	output
4	\$EF15	output
5	\$EF18	input
6	\$EF19	input
7	\$EF22	output
8	\$EF23	input

A block diagram of the M68MM22 module is shown in Figure 3- 4.

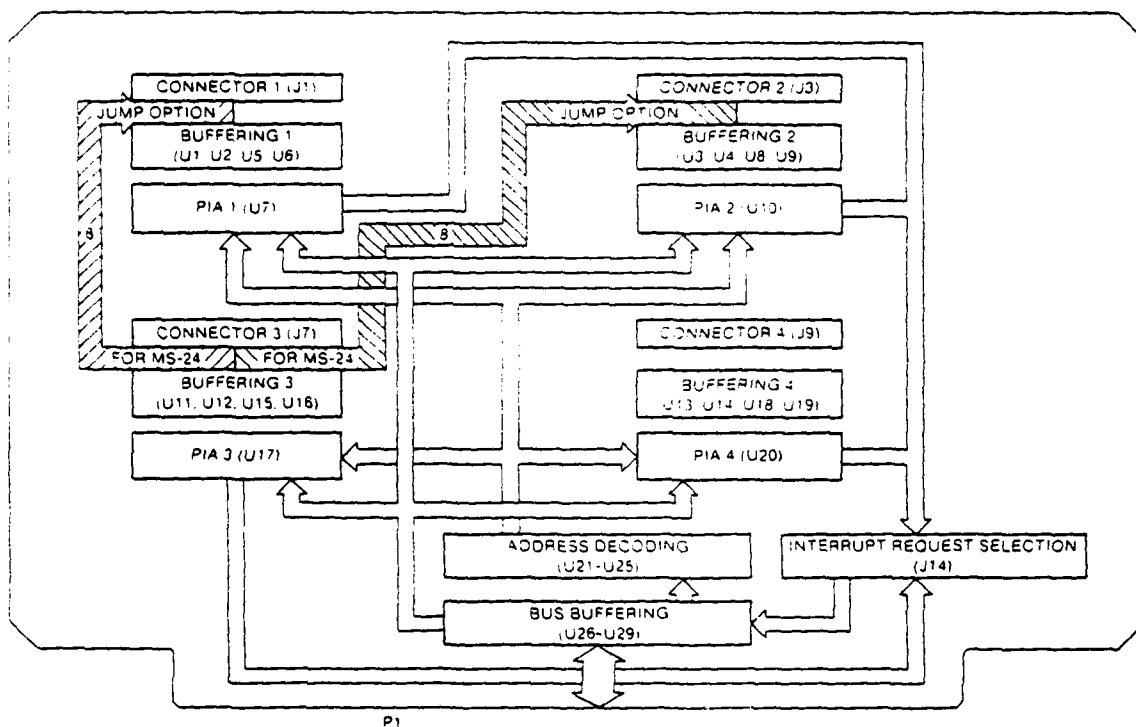


FIGURE 3- 4. Micromodule 22 Block Diagram


3.1.5 MOTOROLA M68MM07 QUAD COMMUNICATIONS MODULE

The M68MM07 module provides four asynchronous serial interface ports. Port 1 is used to interface to the Versatec V80 printer. The other three ports are not utilized.

The V80 interface port is configured as an RS-232C modem ACIA, operating at 38.4 K band with 8 data bits and one stop bit. The device address is \$ECF0.

The physical interface to the V80 is via a cable connecting to board-edge connector P3. Pin 2 on this connector, unassigned for the serial interface, is used as a tie point for a control signal which forces the V80 to 'plot' mode via pin 19 on the V80 parallel interface.

A block diagram of the M68MM07 module is shown in Figure 3-5.



3.1.6 MOTOROLA M68SFDC FLOPPY DISK CONTROLLER MODULE

The M68SFDC module interfaces the dual floppy disk drive to the microprocessor. In addition to the disk interface circuits it contains disk access routines in local ROMs.

The module is configured for VUA addressing.

A block diagram of the M68SFDC module is shown in Figure 3- 6.

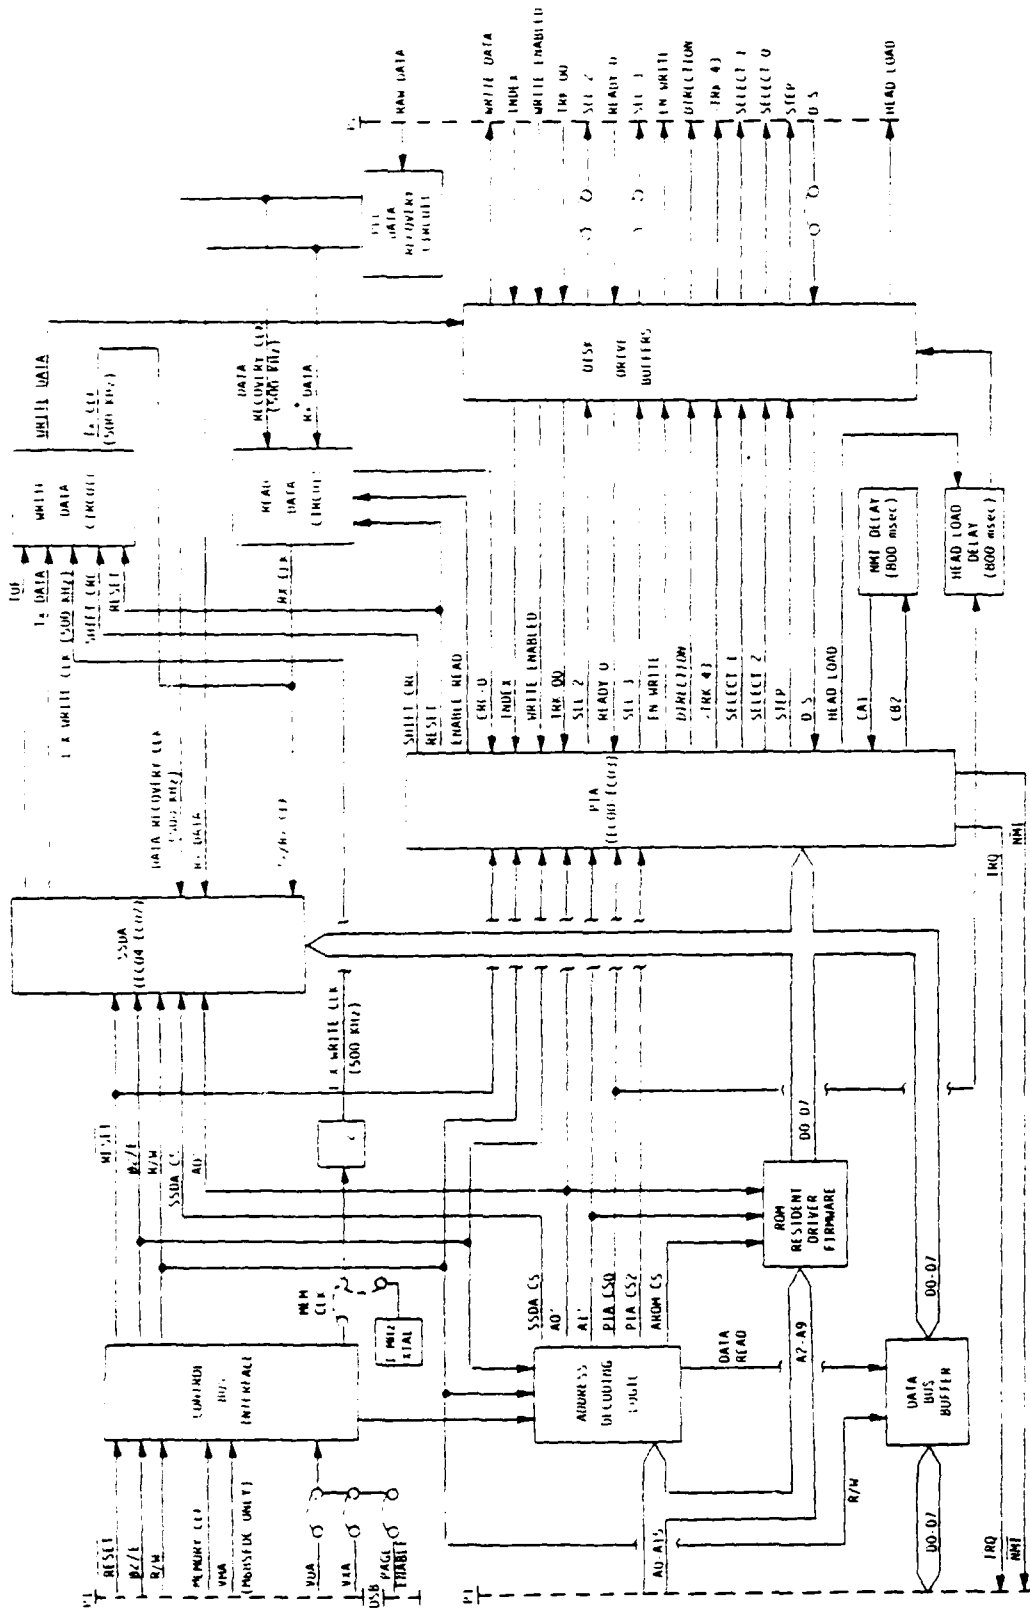


Figure 3-6. Floppy Disk Controller Module Block Diagram.

3.1.7 MODEM CONTROL MODULE

The Modem Control Module consists of a Motorola MEX68USB Universal Support Module containing the following additional devices:

- (a) One MC68B54 advanced Data-Link Controller which controls the low speed HDLC interface between the microprocessor and the modem. The device address is \$ED10.
- (b) One MC68B52 Synchronous Serial Data Adaptor which controls the high speed facsimile data interface between the microprocessor and the modem. The device address is \$ED20.
- (c) One MC6840 Programmable Timer Module which is used to control FAXVAL program timeouts. Counter 1 is used in a continuous internal clock mode to generate a 2 MS timeout which the program uses to update various software counters. The device address is \$ED08.
- (d) Two SN7404 inverter modules and one SN7400 2-input gate modules generate support signals for the above three chips.

A logic diagram of the modem interface circuits and timer circuit is shown in Figure 3-7. The layout of this logic is shown in Figure 3- 8.

A block diagram of the basic MEX68USB board on which this logic is implemented is shown in Figure 3-9.

30 JUNE 82

MODEM CONTROL LOGIC

NOTE: REMOVE U7 & U4 FOR NORMAL OPERATION

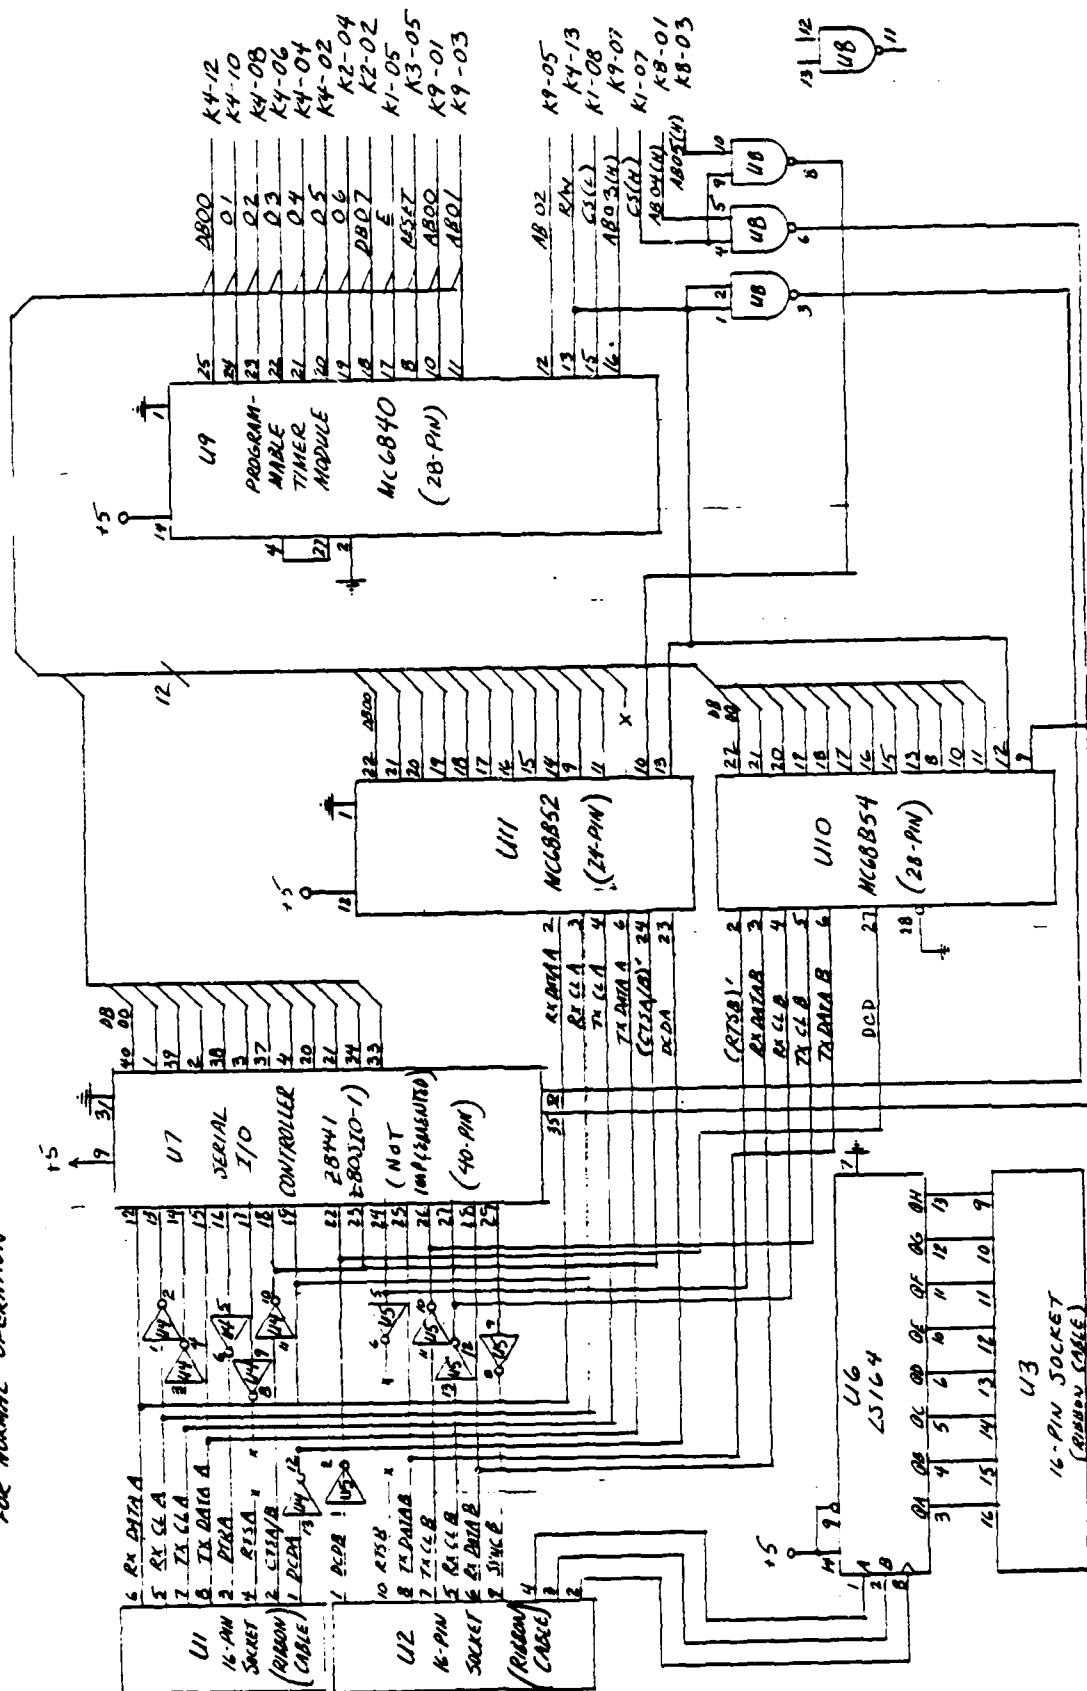


Figure 3-7. Modem Control Logic

BOARD 4

WIRING SIDE
15 SHOWN



41-43	Seals	wire wrap	16-PIN
44-46, 48	"	"	14-PIN
47	"	"	40-PIN
49	"	"	28-PIN

Figure 3-8 Modem Control Layout

3/23/82 *ad*
3/24/82

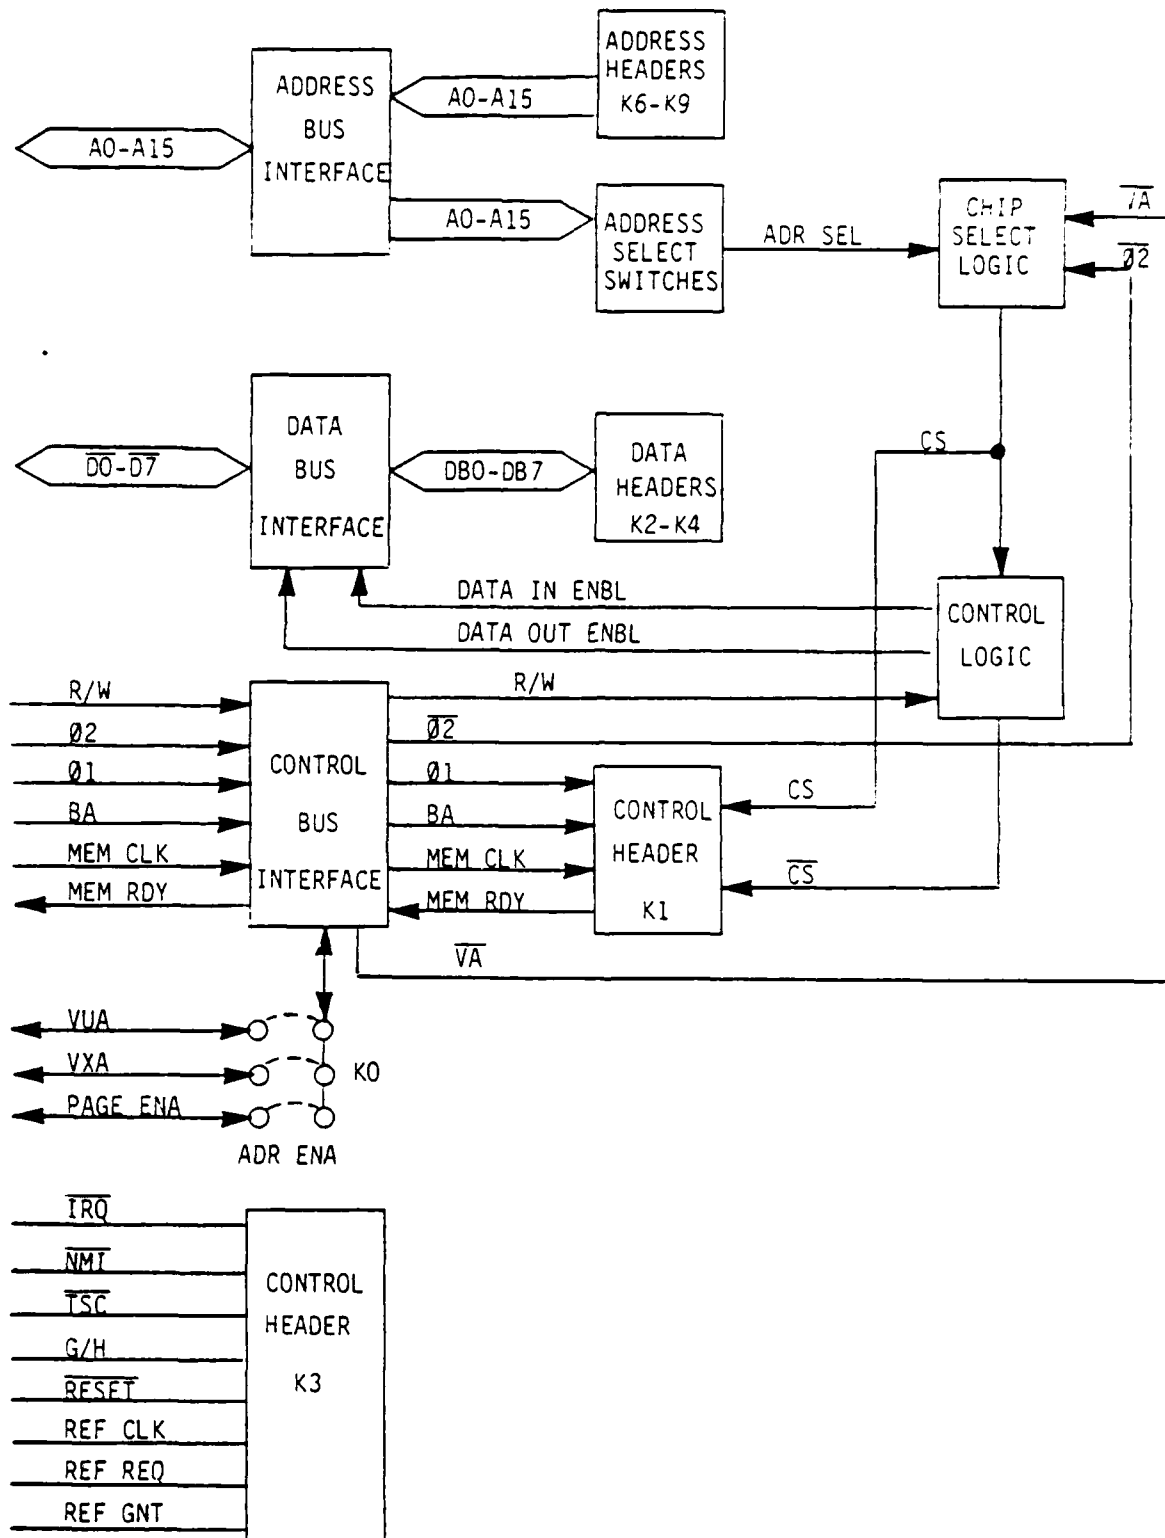


FIGURE 3-9. Universal Support Module Block Diagram


3.1.8 MODEM HOST MODULE

The Modem Host Module consists of a Motorola wire wrap module on which is mounted a Rockwell V96P/1 multi-configuration 9600 BPS modem. The Rockwell modem has CCITT V.29 and V.27 compatibility, and can operate in 9600/7200/4800/2400 bps modes. It interfaces to the switched telephone network through the RPC module described in 3.1.9 below.

A block diagram of the modem is shown in Figure 3-10.

The modem signal interface is shown in Figure 3-11.

V96P/1 FUNCTIONAL DIAGRAM

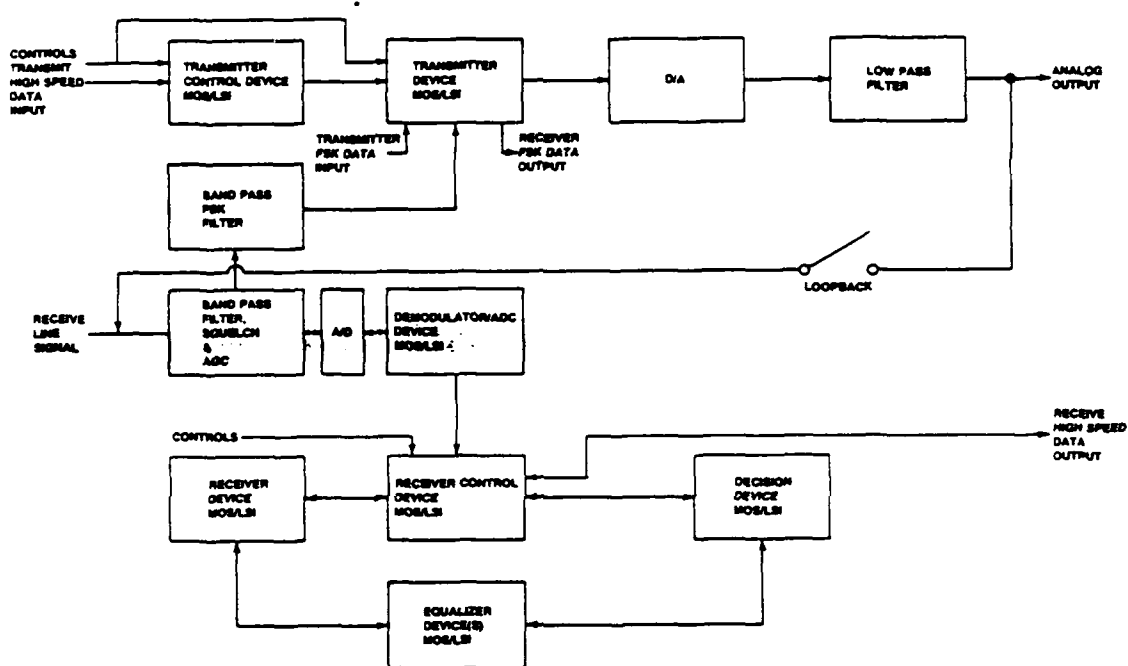

POWER SUPPLIES:

+5V ($\pm 5\%$) +VM, <200 ma
 +12V ($\pm 5\%$) +VA, <110 ma
 -12V ($\pm 5\%$) -V, <280 ma
 (maximum currents)

ENVIRONMENTAL SPECIFICATIONS

Operating temperature: 0°C to 60°C
 Humidity: Up to 90%, non-condensing, or a wet bulb temperature up to 35°C, whichever is less

Figure 3-10 Modem Block Diagram



3.1.9 RPC HOST MODULE

The RPC Host Module consists of a Motorola wire wrap module on which is mounted a Rockwell RPC (Registered Protective Circuitry) module. The RPC interfaces the Rockwell V96P/1 modem to the switched telephone network.

The RPC is configured in permissive mode. The FCC registration number is AMQ9SQ-67943-DP-E. The Ringer equivalent is 0.8B.

A block diagram of the RPC is shown in Figure 3-12.

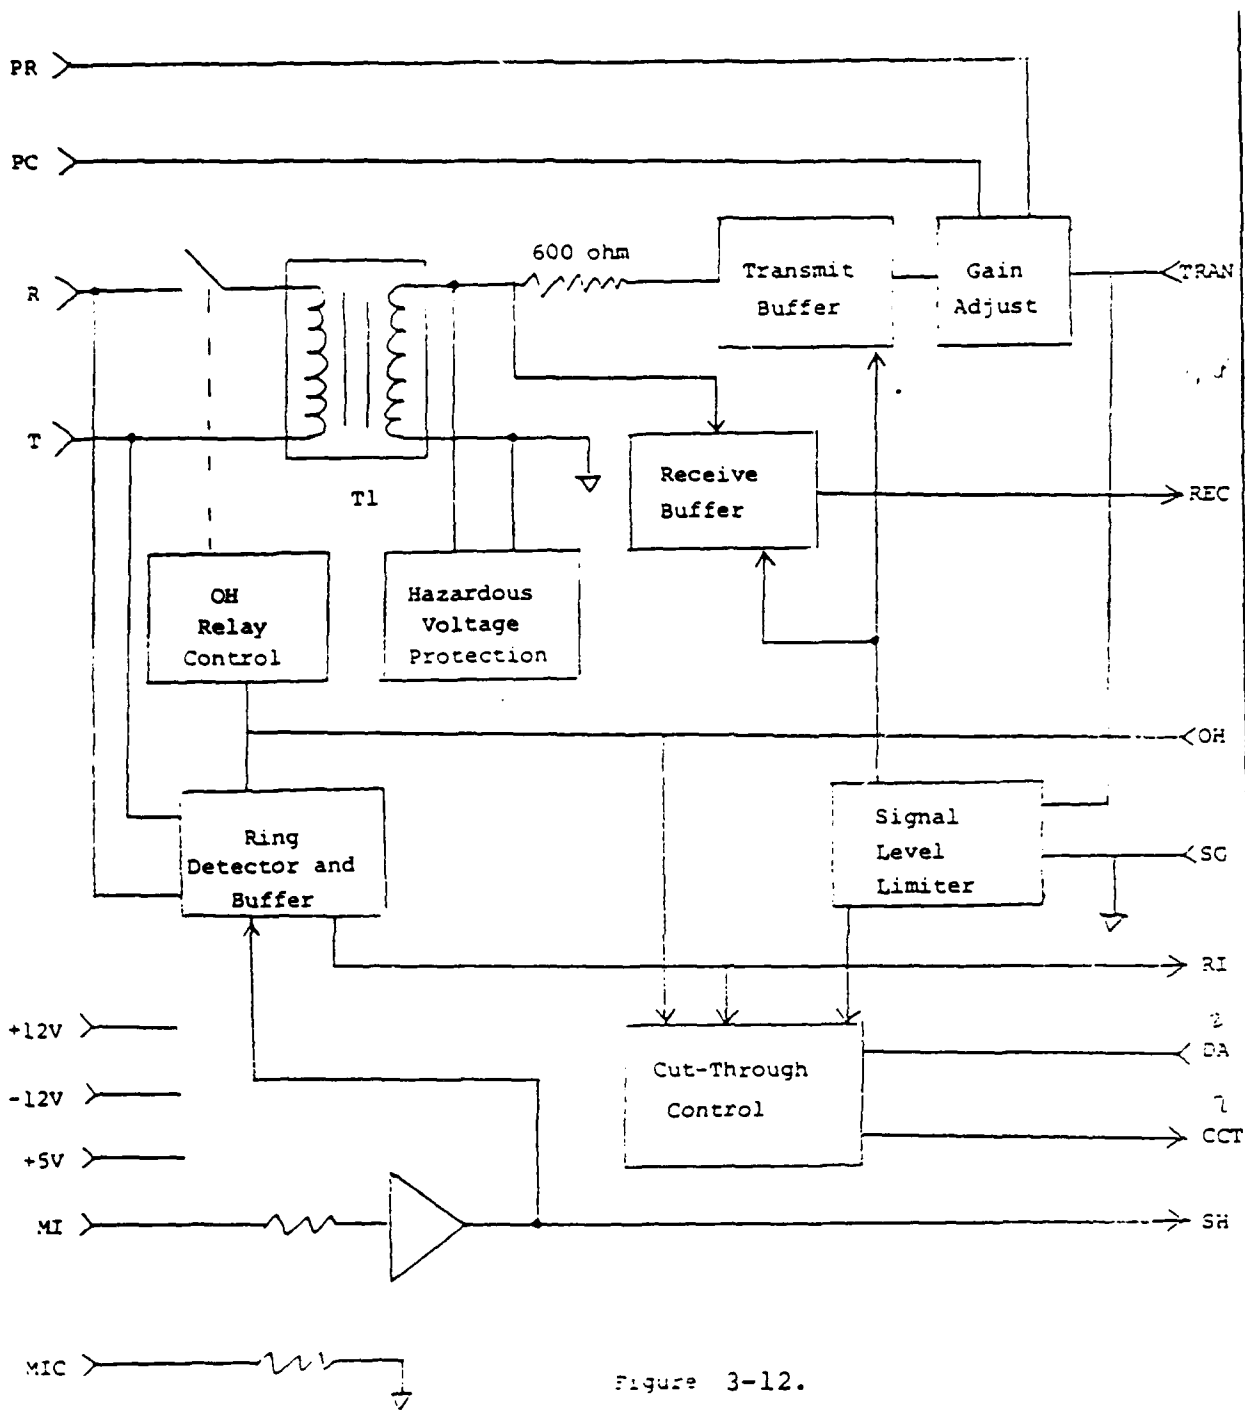


Figure 3-12.

Rockwell RPC Block Diagram

4.0 SOFTWARE DESIGN

The Facsimile Validation (FAXVAL) software hierarchy chart is shown in figure 4-1. FAXVAL is designed to exercise a UUT by running any of a repertoire of ten tests in a manner compatible with EIA standards RS465 and RS466. Operations occurring during test execution are not fixed, but will vary depending upon test parameter selection and upon UUT responses to test situations. Various error conditions can be inserted into test message sequences and UUT response to these errors is recorded.

The FAXVAL program generally does not analyze the group 3 compatibility of UUT operations, but instead lists a complete history of events that occurred during a test. Operator evaluation of this history for group 3 compatibility is required.


The test operator initiates and controls FAXVAL operation through the alphanumeric keyboard on the DEC LA120 printing terminal, and a hard copy record of each test run is printed at this terminal.

FAXVAL is designed such that most operations are table driven and are therefore easily modified. The group 3 protocol is contained in two tables which are accessed after each input and output data transfer to select the next appropriate action. All routines which use or change the test parameters obtain them from a single table. Test parameter entries, test errors, and even the tests themselves can be altered or expanded by changes to the appropriate tables.

FIGURE 4-1

GROUP 3 VALIDATION

SOFTWARE HIERARCHY DIAGRAM

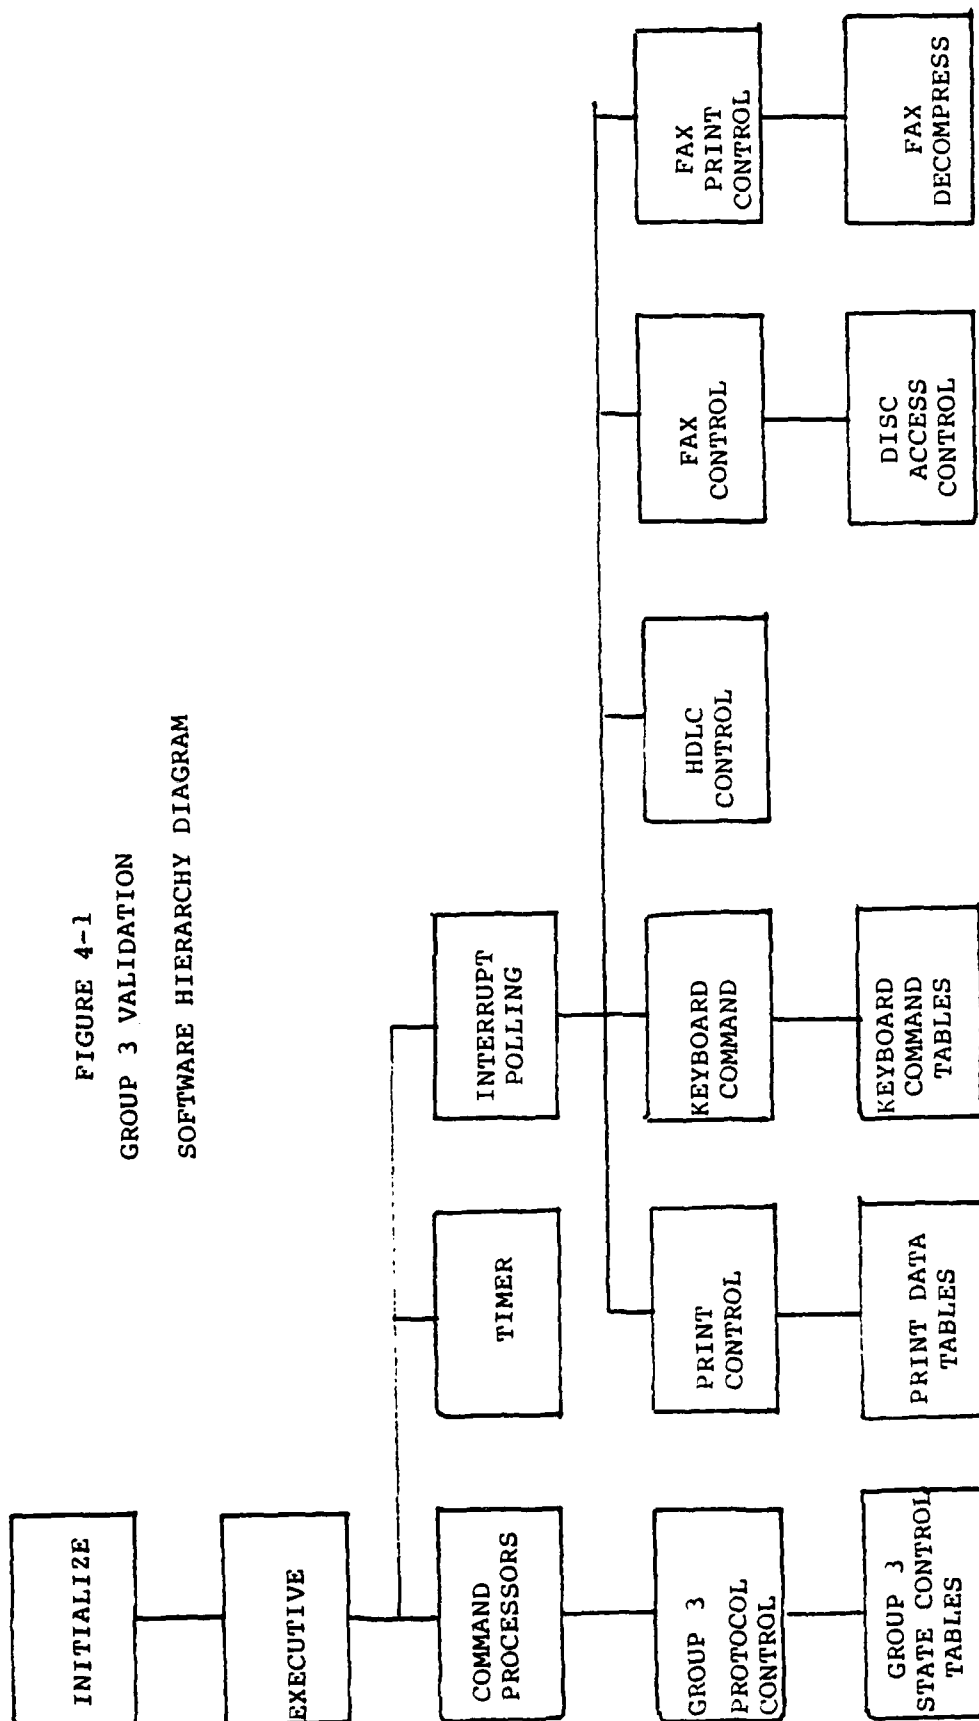

4.1 INITIALIZE

Clears RAM work areas and buffers. Presets operating parameters in RAM. Programs hardware devices such as the timer module and the serial and parallel control modules.

4.2 EXECUTIVE

Runs continually in the background when other routines are inactive. Calls TIMER to update timeouts in progress. Polls interrupt sources (FAX interface, HDLC interface, modem conditions, FAX printer interface, operator keyboard) and calls appropriate interrupt handler routines. Polls group 3 status inputs (command output, response received) to control the group 3 operating state sequence.

4.3 TIMER

Polls timeout requests and updates timeout counters as required. Branches to user defined exit address if timeout expires.

4.4 COMMAND PROCESSORS

Polls group 3 command output and response received status. Selects next group 3 operating state and action.

4.5 INTERRUPT POLLING

Polls interrupting devices for active interrupt requests. Calls appropriate handling routines.

4.6 GROUP 3 PROTOCOL CONTROL/STATE CONTROL TABLES

Uses input/output command codes, operational status, and timeout status to address GROUP 3 STATE CONTROL tables. The table output defines the next action to be taken.

4.7 PRINT CONTROL/DATA TABLES

Controls operator interface printouts. Translates and formats test data and test conditions for operator printout. Controls transfer of data to printer.

4.8 KEYBOARD CONTROL/COMMAND TABLES

Senses and processes operator keyboard inputs.

4.9 HDLC CONTROL

Controls the transfer of HDLC input/output command data. Assembles output message data buffers and interprets input data. Interface with the Group 3 PROTOCOL CONTROL routines.

4.10 FAX CONTROL/DISC ACCESS CONTROL

Controls the transfer of FAX data. Transfers output test documents from the DISC to the FAX interface, and stores input FAX data on the DISC for later printout.

4.11 FAX PRINT CONTROL/FAX DECOMPRESS

Decompresses FAX input data and transfers that data to the V80 printer interface.

5.0 OPERATOR INTERFACE

5.1 KEYBOARD COMMANDS

FAXVAL program operation is controlled by operator keyboard inputs. Available operations are listed below. Each is selected by a 2 letter keyboard entry, with some operations requiring additional numeric entries. The elected operation is executed when RETURN is depressed. Illegal entries will be indicated by a 'WHAT?' printout.

1. LIST TESTS (LT<)

A list of the 10 available tests is printed. The list describes test conditions and specifies inserted errors.

2. LIST ERRORS (LE<)

A list of the available inserted test conditions/errors is printed. This list defines the errors shown by number in the TEST LIST. These 'errors' are non-standard group III operation inserted by the FAXVAL program into communications with the UUT in order to observe the response of the UUT.

3. LIST PARAMETERS (LP<)

A list of the operating parameters and test conditions which are common to all tests. These may be changed (see CP below) to configure the Tester properly for communications with the UUT and to observe the response of the UUT to changes in these parameters.

4. CHANGE PARAMETER (CPN₁N₂<)

Prints the Parameter defined by the two digit suffix (N₁N₂=HEX 09 through 15) and its current value.

Depressing the space bar causes the parameter value to advance to its' next permissible value. When the desired value is reached, depressing the RETURN key terminates the operation.

5. RESET PARAMETERS TO ORIGINAL VALUES (ZP<)

Resets all parameters to the original (usually lowest or most often used) values.

6. ENTER DIAL NUMBER (DNM₁...M₂₀<)

Enters the number to be dialed for 'auto-dial' tests. This number need be entered only once after program initialization. Any number of digits from 1 to 11 can be entered, and only those digits entered will be dialed. If no number is entered the program will dial an infinite sequence of zeros.

To change the number, perform a new entry.

7. ENTER INTERNATIONAL TELEPHONE NUMBER (TNM₁...M₂₀)

Enters the 20-digit number to be transmitted in the FIF of CSI and CIG optional frames. All 20 digits must be entered. This number need be entered only once after program initialization. To change the number, perform a new entry.

8. ENTER NON-STANDARD FIF (NSM₁...M₂₄)

Enter the data to be transmitted in the FIF of NSF or NSS optional frames. The field M₁ through M₂₄ may be any even number of hex digits (0 thru F) from 2 through 24. Only the data entered will be transmitted. This data

need be entered only once after program initialization.

To change it, perform a new entry.

9. ENTER UUT IDENTIFICATION DATA (SIM₁...M₁₂₀<)

Allows entry of 1 line (120 characters maximum) of alphanumeric characters identifying the UUT. This line will be printed at the top of the test history printout following completion of each test. A full line should be entered.

If no entry is made, no data will be printed. The entry need be made only once after program initialization.

Typical information in this field would include the manufacturer, model number, operating mode, date, testers I.D.

10. LIST UUT IDENTIFICATION DATA (LI<)

Prints the current UUT Identification line.

11. SELECT TEST (STM₁M₂<)

Selects a test. M₁ M₂ may be any value from 01 through 0A. The test conditions and current parameter values are printed.

12. RUN TEST (RU<)

The last test selected will be performed. 'TEST RUNNING' is printed. The completion of the test will be indicated by an automatic printout of

- a) the UUT I.D. Data
- b) the test description and parameter values
- c) the test history

13. ABORT TEST (AB<)

Aborts the test. The tester disconnects from the UUT.

14. LIST TEST HISTORY (LH<)

The test history of the last test run is printed.

15. PRINT LAST RECEIVED DOCUMENT (PV<)

The last received facsimile document is decoded and plotted on the Versatec V80. The decoding method (Huffman or Modified Read) is determined by the setting of parameter 09. The minimum number of bits per line, the number of error lines, and the total number of lines decoded are printed on the LA120 for each document page.

16. DECODE LAST RECEIVED DOCUMENT (LL<)

The first page of the last received document is decoded using the method defined by parameter 09. The minimum number of bits per line, the number of error lines, and the total number of lines decoded are printed.

5.2 TEST PARAMETERS

The thirteen parameters printed for an 'LP' keyboard command and as part of an 'ST' printout are common to all tests. A description of these parameters and their allowable values is given below. A summary of the parameters and their values is shown in table 5-3.

1. COMPRESSION METHOD (09)

A) HUFFMAN

Sets bit 16 of the DIS, DTC, and DCS FIF fields to 'zero'. Selects 1-dimensional decoding of received facsimile data for output to the Versatec V80 plotter. Test documents 1 and 2 are HUFFMAN coded.

B) MODIFIED READ

Sets bit 16 of the DIS, DTC, and DCS FIF fields to a 'one'. Selects 2-dimensional decoding of received facsimile data for output to the Versatec plotter. Test document 3 is MODIFIED READ coded.

2. MINIMUM SCAN LINE TIME (0A)

Selects the 3-bit code in FIF bits 21 through 23. Specifies a minimum scan line time for data transmitted by the UUT, which should add fill as necessary to meet this requirement. No real Tester receive time limit exists, of course. Data received from the UUT is simply stored in RAM memory and then transferred to disk.

-FIF-

	<u>Value</u>	<u>DIS/DTC code</u> <u>(bits 21-22-23)</u>	<u>DCS code</u> <u>(bits 21-22-23)</u>
(a)	0	111	111
(b)	5	100	100
(c)	10	010	010
(d)	20	000	000
(e)	40	001	001
(f)	10/5	011	010/100
(g)	20/10	110	000/010
(h)	40/20	101	001/000

The double entries refer to the value at a vertical resolution of:

7.7 lines per MM/3.85 lines per MM.

Other entries are independent of vertical resolution.

3. VERTICAL RESOLUTION (0B)

A) 3.85 lines/mm

Sets FIF bit 15 to zero

B) 7.7 lines/mm

Sets FIF bit 15 to one.

4. MAXIMUM PAPER WIDTH (0C)

FIF code

(bits 17-18)

A) 216 mm	00
B) 256 mm	10
C) 297 mm	01

5. MAXIMUM PAPER LENGTH (0D)

FIF code

(bits 19-20)

A) 297 mm	0 0
B) 364 mm	1 0
C) UNLIMITED	0 1

6. DATA SIGNALING RATE (OE)

Selects the bit rate for which the modem is configured in both transmit and receive modes.

Sets the following code into the DCS FIF:

DCS FIF field	
<u>Value</u>	<u>(bits 11-12)</u>
(A) 2400 bps	0 0
(B) 9600 bps	1 0
(C) 4800 bps	0 1
(D) 7200 bps	1 1

Bits 11, 12 of the DIS/DTC FIF are always set to '1,1', indicating V.27 ter and V. 29 capability.

The Data Signaling Rate may automatically change under the following conditions:

A) TESTER data transmission.

If a FTT response to a preliminary train sequence (DCS, TCF) is received, and 'TX BIT RATE FALLBACK' (parameter 12) is enabled, the Data Signaling Rate will drop to the next lower value and the preliminary train sequence will be repeated. If 'TX BIT RATE FALLBACK' is disabled, the preliminary train will be repeated at the original bit rate.

B) UUT data transmission

If a DCS message is received specifying a lower bit rate than that selected, the Data Signaling Rate will automatically be set to this lower value. If a DCS is received specifying a

higher bit rate than that selected, the Data Signalling
Rate will be unchanged and an FTT response will be generated.

7. PREAMBLE DURATION (OF)

Selects the duration of the flag preamble to low speed HDLC messages.

(A) 0.86 seconds (low limit)

(B) 1.14 seconds (high limit)

8. TX TEST DOCUMENT (10)

Selects one of the documents stored on disk#1 (FAXDOC) for transmission if the test being run requires a transmission.

- A) Test document 1 is two pages, HUFFMAN CODED. It consists of actual facsimile data previously received and stored.
- B) Test document 2 is two pages, HUFFMAN coded. The first page is a computer generated pattern. The second page is actual facsimile data previously received and stored.
- C) Test document 3 is two pages, MODIFIED READ coded.
- D) The 'LAST RECEIVED' document is the latest facsimile data received. It may consist of 1 or 2 pages.

9. TCF/FAXIN RESPONSE (11)

Selects the tester response to the preliminary train (DCS, TCF sequence) and facsimile data inputs.

A) CFR/MCF

Selects CFR as a response to DCS, TCF and MCF as a response to EOM, EOP, or MCF following facsimile data.

The CFR response may be over-ridden by an automatic FTT response if the training bit rate specified in DCS is higher than that selected in parameter field (0E).

B) CFR/RTP

Same as (A) above except that RTP replaces MCF as the data input response.

C) FTT/RTN THEN CFR/MCF

The first response to the DCS, TCF training sequence is FTT. All subsequent responses are CFR, subject to the automatic FTT described in (A) above. The first response to EOM, EOP, or MPS after facsimile data input is RTN. All subsequent responses are MCF.

(D) ALWAYS FTT/RTN

All responses to DCS, TCF are FTT. All responses to ECP, EOM, or MPS after facsimile input data are RTN.

10. TX BIT RATE FALLBACK (12)

When enabled, TX BIT RATE FALLBACK automatically drops the transmit bit rate to the next lower value if a FTT response to a preliminary train sequence is received. When disabled, the preliminary train is repeated at the original bit rate.

11. OPTIONAL FRAMES (13)

Selects optional frames for transmission.

(A) NONE

No optional frames are transmitted

(B) NSF WITH FIRST DIS

An NSF frame, with an FIF field containing the data previously entered via the 'NS' keyboard command, preceeds the first DIS frame transmitted. After a response to the DIS is received, subsequent DIS commands will not include the NSF frame. If no response is received, NSF, DIS sequence is repeated.

(C) CSI/CIG WITH FIRST DIS/DTC

A CSI frame, with an FIF field containing the 20 byte international telephone number previously entered via the 'TN' keyboard command proceeds the first DIS frame transmitted. A CIG frame with the same FIF field preceeds the first DTC. After responses are received, subsequent DIS and DTC commands will not include the CSI or CIG frames.

(D) NSF, CSI, CIG

The first DIS frame is preceeded by both the NSF frame and the CSI frame.

The first DTC frame is preceeded by CIG.

12. EXTENDED FIF (14)

This controls the FIF field length for DIS, DCS, and DTC message. Selecting a 3-byte FIF sets the FIF bit 24 to 'zero'. Selecting a 4-byte FIF sets FIF bit 24 to a 'one', and causes a 4th (all zeros) byte to be added to the FIF.

13. AUTO TEST ERRORS (15)

Enables or disables the automatic test errors specified in the 'Test List' and described in the 'List Errors' printout.

Table 5-1

SUMMARY OF KEYBOARD COMMANDS

1. LT<	LIST TESTS
2. LE<	LIST ERRORS
3. LP<	LIST PARAMETERS
4. ZP<	ZERO PARAMETERS (RESET TO BASE VALUES)
5. CPN ₁ N ₂ <	CHANGE PARAMETER (N ₁ N ₂ = 09 THRU 15) ('SPACE' KEY SELECTS NEXT PARAMETER VALUE, 'RETURN' KEY EXITS CHANGE PARAMETER MODE.)
6. STN ₁ N ₂ <	SELECT TEST (N ₁ N ₂ = 01 thru 0A)
7. RU	RUN SELECTED TEST
8. DNM ₁ ...M ₁₁ <	ENTER AUTO-DIAL TELEPHONE NUMBER (M ₁ ...M ₁₁ = 1 THRU 11 DECIMAL DIGITS)
9. TNM ₁ ...M ₂₀ <	ENTER INTERNATIONAL TELEPHONE NUMBER FOR CIG/CSI FIF FIELDS (M ₁ ...M ₂₀ = 20 DECIMAL DIGITS)
10. NSM ₁ ...M ₂₄ <	ENTER NON-STANDARD FRAME FIF FIELD (M ₁ ...M ₂₄ = EVEN NUMBER OF HEX DIGITS FROM 2 THRU 24)
11. SI [120 A/N]<	ENTER UUT IDENTIFICATION LINE (120 MAX ALPHANUMERIC CHARACTERS)
12. LI<	LIST LAST ENTERED UUT IDENTIFICATION LINE
13. AB<	ABORT TEST
14. LH<	LIST TEST HISTORY FORM LAST TEST RUN
15. PV<	PLOT LAST RECEIVED DOCUMENT ON V80. PRINT MIN BITS PER LINE. ERROR LINES/TOTAL LINES.

16. LL<

RUN DECODE ON LAST RECEIVED DOCUMENT. PRINT
MIN BITS PER LINE, ERROR LINES/TOTAL LINES.

MINIMUM SCAN LINE (MS)	MINIMUM BITS PER LINE			
	2400 BPS	4800 BPS	7200 BPS	9600 BPS
0	-	-	-	-
5	12	24	36	48
10	24	48	72	96
20	48	96	144	192
40	96	192	288	384

Table 5-2 MINIMUM BITS/SCAN LINE

SUMMARY OF TEST PARAMETERS

NO.	PARAMETER	HUFFMAN	MOD. READ	10 MS 20/10* MS	20 MS 40/20* MS
09	COMPRESSION METHOD				
0A	MINIMUM SCAN TIME	0 MS 40 MS	5 MS 10/5* MS		
0B	VERTICAL RESOLUTION	3.85 L/MM	7.7 L/MM		
0C	MAX PAPER WIDTH	216 MM	256 MM	297 MM	
0D	MAX PAPER LENGTH	297 MM	364 MM	UNLIMITED	
0E	DATA SINGALLING RATE	2400 BPS	4800 BPS	7200 BPS	9600 BPS
0F	FLAG PREAMBLE DURATION	0.86 SEC	1.14 SEC		
10	TEST DOCUMENT	1 (HUFF)	2 (HUFF)	3 (M.READ)	LAST RCVD
11	TCF/FAXIN RESPONSE	CFT/MCF	CFR/RTP	FTT/RTN then CFR/MCF	FTT/RTN
12	TX BIT RATE FALLBACK	ENABLED	DISABLED		
13	OPTIONAL FRAMES	NONE	NSF	CSI, CIG	NSF, CSI, CIG
14	EXTENDED FIF	NO (3 BYTES)	YES (4BYTES)		
15	AUTO TEST ERRORS	ENABLED	DISABLED		

* N/M = (N)MS AT 3.85 L/MM, (M) MS AT 7.7 L/MM

Table 5-3

6 . TEST PROCEDURE

This section describes the methods of initializing, running, and analyzing a validation test on a group 3 facsimile machine.

6.1 TEST CONFIGURATION

The test equipment configuration is shown in figure 6-1. The tester is connected to the Unit Under Test (UUT) through a local (presumably short) switched telephone network connection. Details of the UUT connection will vary depending upon the specific machine under test. Equipment at remote locations may be tested provided that the telephone connection is adequate for the data transmission at the highest required bit rate. Remote testing obviously requires a separate voice connection with an on-site operator.

6.2 HARDWARE INITIALIZATION

(A) Energize the equipment in the following order:

1. Exorciser II
2. Exordisk III
3. DEC LA120 printing terminal
4. Versatec V80 plotter
5. UUT

(B) Set the DEC terminal ON LINE.

- (C) Perform a local form feed at the DEC terminal
and, if necessary, manually adjust the print head
to the top of form position.
- (D) Perform a local form feed at the V80 plotter.

6.3 PROGRAM INITIALIZATION

The Facsimile Validation program is loaded by the following sequence of operations.

- (1) Insert the FAXVAL disk in drive 0 (left drive)
and the TESTDOC disk in drive 1.
- (2) Depress RESTART at the EXORciser.
- (3) Type MDOS< (< = RETURN key) at the DEC terminal
A '=' cue will appear.
- (4) Type LOAD FAXVAL<
A 'E' cue will appear
- (5) Type .P<. A display showing the current value of the
Program counter will appear.
- (6) Type 475E<. A ':' cue will appear. The program is
now running, and the FAXVAL keyboard commands listed
in table 5-1 can be executed.

6.4 PRELIMINARY TEST OPERATIONS.

- (A) Perform an 'LT' keyboard operation to obtain a test list printout for later reference.
- (B) Perform an 'LE' keyboard operation to obtain a test error description printout for later reference.
- (C) Perform an 'LP' keyboard operation to obtain a list of test parameters for later reference. Typical printout of 6.4(A) through (C) are shown in figure 6-2.
- (D) Enter the UUT telephone number using a 'DN' command. Ordinarily this is 7 or 11 digits, but fewer may be entered if required. This entry need be made only once after program initialization. It can be changed at any time.
- (E) Enter the 20 digit International Telephone Number used for CSI and CIG FIF fields using the 'TN' command. Unless a specific number is required, enter any arbitrary digits. This entry need be made only once after program initialization. It can be changed at any time.
- (F) Enter the non-standard frame FIF data using the 'NS' command. Unless a specific pattern is required, enter any even numbers of hex characters up to 48 (24 bytes). This entry need be made only once after program initialization. It can be changed at any time.
- (G) Enter the UUT Identification line using the 'SI' command. This line consists of up to 120 alphanumerics

which should normally identify:

1. Manufacture and model number
2. Configuration
3. Date
4. Testing facility

This entry need be made only once after program initialization. It can be changed at any time.

6.5 TEST EXECUTION

The sequence of tests performed and the parameter settings for these tests will be, in general, unique to each machine tested. The first tests performed might be test 04 and test 03 to verify that communications with the UUT has been established. Following this the tests listed in table 6-3 might be performed in sequence, and an analysis of the results may indicate the need for re-testing or testing with different parameter settings.

The following procedures should be used to run the individual tests. Keyboard entry of the auto-dial number (DN), the international telephone number (TN), the non-standard FIF (NS), and the UUT identification data (SI) must be performed once after program initialization prior to running any tests, but need not be repeated for each test.

Parameter value changes may be made any time before or after selecting a test. The selected parameter values are common to all tests.

If for any reason it is necessary to abort a test in progress, type 'AB<' The test will terminate, and the test history accumulated to that point will be printed.

6.5. 1. TEST 01

Test 01 requires manual call establishment, with the UUT the calling station and document source. One facsimile page is transmitted.

6.5.1.1 Parameters

The test parameters should be set to the nominal values specified in table 1.

6.5.1.2 Error Conditions

The tester will respond PIN to the FAX transmission. This should provoke the UUT to issue an operator alert and if no line request is made, to disconnect after a T3 ($10^+ 5$ sec.) timeout.

6.5.1.3 Test Procedure

- (a) Type 'ST01<'. The test description and parameters will be printed.
- (b) Insert a test document in the UUT document feeder.
- (c) Manually dial the Tester from the UUT telephone. Do not replace the UUT handset.
- (d) Manually answer the Tester telephone
- (e) Type 'RU<'
- (f) Wait approximately 1 second, then pull the tester phone exclusion key UP.
- (g) Listen at the UUT receiver for a tone sequence from the Tester. At the end of a sequence initiate document transmission (depress SEND control) and replace the UUT handset.
- (h) The UUT scans the test document and transmits the facsimile data to the Tester, which writes it onto disk #1.
- (i) If AUTO TEST ERRORS are enabled, the Tester responds PIN to EOP, causing an operator alert at the UUT. 'START TIMEOUT' prints at the terminal.
- (j) After approximately 10 seconds the UUT will terminate the operator alert and disconnect. Press the 'RETURN' key when this occurs to complete the timeout measurement and terminate the test.
- (k) The test history is automatically printed at test completion.
- (m) Replace the Tester handset.

6.5.2 TEST 02

Test 02 requires manual operation at the calling station (tester) and automatic operation at the called station (UUT). The tester transmits one facsimile page to the UUT.

6.5.2.1 Test Parameters

The test parameters should be set to the nominal values specified in table 1. The TX TEST DOCUMENT will normally be that received during Test 01, but may be any other test document compatible with the UUT compression method.

6.5.2.2 Test Errors

The Tester transmits PRI-EOP after transmitting facsimile data. The UUT should issue an operator alert and disconnect after the third transmission of PRI-EOP.

If the UUT operator alert is answered by some appropriate operator action, the UUT should transmit a PIN or PIP response to PRI-EOP.

6.5.2.3 Test Procedure

- (a) Type 'STO2<'. The test description and parameters will be printed.
- (b) Manually dial the UUT from the Tester telephone.
Do not pull the exclusion key.
- (c) Allow the UUT to answer the call automatically.
- (d) Type 'RU<'.
(e) Wait approximately one second.
- (f) Pull the Tester phone exclusion key UP.
- (g) The Tester will read the selected test document from disk #1 and transmit it to the UUT.
- (h) If AUTO TEST ERRORS are enabled, the UUT issues an operator alert after receiving a PRI-EOP message following the facsimile data.
- (i) The test history is automatically printed at test completion.
- (j) Replace the Tester handset.

6.5.3 TEST 03

Test 03 requires automatic operation at the calling station (tester) and manual operation at the called station (UUT). The Tester transmits one facsimile page to the UUT.

6.5.3.1 Test Parameters

The test parameters should be set to the nominal values shown in table 1.

6.5.3.2 Test Errors

The Tester will generate a false facsimile control code (\$05) in the EOP message following facsimile data transmission. Subsequent operation depends upon the UUT response. If no response is received from the UUT, the Tester will generate a correct EOP message after a T4 timeout.

6.5.3.3 Auxiliary Tests

Test 03 run with fully automatic circuit establishment and with the TX TEST DOCUMENT set to LAST RECEIVED is a convenient method of verifying facsimile data received by the Tester.

6.5.3.4 Test Procedure

- (a) Type 'ST03<'. The test description and parameters will be printed
- (b) Remove the tester handset and pull the exclusion key UP
- (c) Type 'RU<'
- (d) The tester will automatically dial the UUT.
- (e) Manually answer the UUT phone.
- (f) Wait for a tone sequence from the tester and then initiate document reception at the UUT (depress RECEIVE switch) and replace the UUT handset. (Note: the test also may be run automatically, allowing the UUT to answer the call).
- (g) The Tester will read the test document from disk #1 and transmit it to the UUT.
- (h) The test history will be printed automatically at test completion.
- (i) Replace the UUT handset.

6.5.4. TEST 04

Test 4 requires automatic call establishment. The tester polls the UUT, which transmits one facsimile page.

6.5.4.1 Test Parameters

The test parameters should be set to the nominal values shown in table 1.

6.5.4.2 Test Errors.

Three error conditions are implemented in Test 04.

- (a) The tester ignores the first DIS message from the UUT. The UUT should re-transmit DIS.
- (b) The tester discards one MPS, EOM, or EOP message following facsimile data transmission from the UUT, and responds with a CRP message. The UUT should repeat the discarded message.
- (c) The tester CFR response to a UUT facsimile data transmission has bit 5 of the control byte set incorrectly to 'zero' (indicating more frames to come in the HDLC message). The UUT should discard this message.

6.5.4.3 Auxiliary Tests

Test 04 can conveniently be used to exercise several other test conditions. AUTO TEST ERRORS will normally (but not necessarily) be disabled when they are run. After each

of these, test 03 may be run in a fully automatic mode to verify the facsimile data received during test 04.

- (a) Set TCF/FAXIN RESPONSE (parameter 11) to 'ALWAYS FTT/RTN'. This test demonstrates the UUT response to continual negative response to preliminary train and facsimile data transmission.
- (b) Set the DATA SIGNALLING RATE (parameter 0E) to 2400 BPS. If the UUT attempts to transmit data at rates higher than this, the tester will generate FTT responses until the UUT drops its bit rate to match the tester bit rate. This test requires the TDF/FAXIN RESPONSE parameter to be set to 'CFR/MCF'.
- (c) Set the MIN SCAN LINE TIME and DATA SIGNALING RATE parameters to various combinations which will exercise the UUT's ability to inset fill characters into the facsimile data (see table 2). After each facsimile transmission perform a keyboard 'LL' operation to determine whether the transmission met the scan line time requirements.

6.5.5.3 Test Procedure

- (a) Type 'ST05<'. The test description and parameters will be printed.
- (b) Set the DATA SIGNALLING RATE to 9600 BPS.
- (c) Adjust the line attenuator control at the left of the Tester card cage to a setting of approximately '1'. The function of the attenuator is to reduce signal amplitude to the UUT to a point where it will not train at 9600 BPS, but will train at one of the lower frequencies. The test may have to be repeated several times to achieve this attenuation.
- (d) Remove the Tester telephone handset and pull the exclusion key UP.
- (e) Type 'RU<'.
(f) Manually dial the Tester from the UUT telephone. The Tester will automatically answer the call.
- (g) Listen at the UUT for a tone sequence. At the end of the sequence initiate document reception (press RECEIVE switch) and replace the UUT handset.
- (h) The Tester will read the test document from disk #1 and transmit it to the UUT.
- (i) The test history is automatically printed at test completion.
- (j) Replace the Tester handset.
- (k) Reset the line attenuator control to the normal setting of approximately '7'.

6.5.6. TEST 06

Test 06 requires automatic call establishment. The tester calls the UUT and transmits a two page document to it.

6.5.6.1 Test Parameter

The test parameters should be set to the nominal values shown in table 1.

6.5.6.2 Test Error

The tester does not transmit an EOP message following the second facsimile page. The UUT should disconnect after a T2 timeout period (6 ± 1 sec).

6.5.6.3 Test Procedure

- (a) Type 'ST06<'. The test description and parameters will be printed.
- (b) Select a test document with at least two pages.
- (c) Remove the Tester telephone handset and pull the exclusion key UP.
- (d) Type 'RU<'.
 - (e) The tester will automatically dial the UUT. The UUT will automatically answer the call.
 - (f) The tester will read two pages of facsimile data from disk #1 and transmit this data to the UUT.
 - (g) At the end of the second page the tester will omit transmission of an EOM message and print 'START TIMEOUT MEASUREMENT'.
 - (h) In approximately 6 seconds the UUT will disconnect. Type 'RETURN' when this occurs to complete the timeout measurement and terminate the test.
 - (i) The test history will be automatically printed at test completion.
 - (j) Replace the Tester handset.

6.5.7. TEST 07

Test 07 requires automatic call establishment. The UUT calls the tester and transmits a two page document.

6.5.7.1 Test Parameters

The test parameters should be set to the nominal values shown in table 1.

6.5.7.2 Test Errors

Two test error conditions are exercised in test 07:

- (a) The tester ignores receipt of a MPS, EOP, or EOM message after receipt of facsimile data. The UUT should re-transmit the message.
- (b) The tester generates a CFR message with bit 5 of the control byte set to zero (which would normally indicate that more frames were forthcoming in the HDLC message.) Subsequent operation depends upon the UUT response. If it simply discards the message the tester will retransmit a correct CFR message after a T4 timeout.

6.5.7.3 Test Procedure

- (a) Type 'ST07<'. The test description and parameters will be printed.
- (b) Place two documents in the UUT document feeder.
- (c) Remove the Tester handset and pull the exclusion key UP.
- (d) Type 'RU<'.
 - (e) Manually dial the tester form the UUT. The Tester will automatically answer the call.
 - (f) Listen at the UUT for a tone generated by the Tester.
At the end of the sequence initiate UUT document transmission (press the SEND switch) and replace the UUT handset.
 - (g) The UUT will scan and transmit two facsimile pages to the Tester, which will store them on disk #1.
 - (h) The test history will be automatically printed at test completion.
 - (i) Replace the Tester handset.

6.5.8. TEST 08

Test 08 requires automatic call establishment. The tester calls the UUT, transmits a two page document, and then receives a two page document.

6.5.8.1 Test Parameters

The test parameters should be set to the nominal values shown in table 1. The TX TEST document must have at least two pages.

6.5.8.2 Test Errors

No automatic test errors are inserted in test 08.

6.5.8.3 Test Procedure

- (a) Type 'ST08<'. The test description and parameters will be printed.
- (b) Select a TX TEST DOCUMENT with two pages.
- (c) Insert two documents in the UUT 'document feeder.
- (d) Remove the tester handset and pull the exclusion key UP.
- (e) Type 'RU<'. .
- (f) The tester will automatically dial the UUT. The UUT will automatically answer the call.
- (g) The tester will read two pages from disk #1 and transmit these to the UUT.
- (h) The UUT will scan the two documents in its feeder and transmit these to the tester, which will store them on disk #1.
- (i) The test history will be automatically printed at test completion.
- (j) Replace the tester handset.

6.5.9. TEST 09

Test 09 requires automatic circuit establishment. The UUT calls the tester.

6.5.9.1 Test Parameters

Test parameter selection does not affect test operation.

6.5.9.2 Test Errors.

The tester does not send a DIS response to the UUT call.
The UUT should disconnect after a T1 (35 ± 5 seconds) timeout.

6.5.9.3 Test Procedure

- (a) Type 'ST09'. The test description and parameters will be printed.
- (b) Insert a document in the UUT document feeder.
- (c) Remove the Tester handset and pull the exclusion key UP.
- (d) Type 'RU<'. .
- (e) Manually dial the Tester from the UUT. The Tester will automatically answer the call.
- (f) Listen at the UUT for the CED tone generated by the Tester. At the completion of the tone, initiate document transmission at the UUT (depress the SEND switch) and replace the UUT handset.
- (g) The Tester will inhibit transmission of a DIS message, and 'START TIMEOUT MEASUREMENT' will be printed.
- (h) After approximately 35 seconds the UUT will disconnect. When this occurs type 'RETURN' to complete the timeout measurement and terminate the test.
- (i) The test history will automatically be printed at test completion.
- (j) Replace the tester handset.

6.5.10. TEST 0A

Test 0A requires automatic circuit establishment. The UUT calls the tester.

6.5.10.1 Test Parameters

Test parameter selection does not affect test operation.

6.5.10.2 Test Errors

The tester transmits an illegal command code in the DIS message. The UUT should disconnect.

6.5.10.3 Test Procedure

- (a) Type 'ST0A<'. The test description and parameters will be printed.
- (b) Insert a test document in the UUT document feeder.
- (c) Remove the Tester handset and pull the exclusion key UP.
- (d) Manually dial the Tester from the UUT. The Tester will automatically answer the call.
- (e) Listen at the UUT for a tone sequence from the Tester. At the end of the sequence initiate document transmission (press SEND switch), and replace the UUT handset.
- (f) The Tester will generate an illegal command, which should cause the UUT to disconnect immediately.
- (g) The Tester will continue sending this command for approximately 35 seconds before terminating the test. If desired the test can be terminated before this by typing 'AB<'.
If desired the test can be terminated before this by typing 'AB<'.
- (h) The test history will be automatically printed at test completion.
- (i) Replace the Tester handset.

(c) Data transfers, pre-train sequences, timeouts, and special conditions are indicated by a descriptive comment in parentheses. For example:

- (1) The tester received no response to its DIS message on line 01 within the T4 timeout period (4.5 seconds since the tester is in manual mode). Line 02 indicates this timeout and line 03 indicates the DIS retransmission.
- (2) After receipt of a DCS message (line 04) the tester received a TCF facsimile pretrain transmission of approximately 1.2 seconds in duration.
- (3) Inserted test errors are usually accompanied by a comment with a "T.C;" prefix (Test Condition) such as that shown on line 0A.
- (4) The time between transmission of the PIN message and the UUT disconnect was approximately 13.8 seconds as shown on line 0B.

In general, the FAXVAL program does not analyze the test history message sequences and timeout durations for group 3 compatibility. Operator verification of the sequences is required. Except for inserted error conditions, however, the program will always respond to a situation in accordance with group 3 requirements.

There are certain tests automatically made on all received HDLC messages, and a message which fails to meet any of these is discarded with an appropriate explanation in the test history.

- (a) A message must be received within 2.55 seconds.
- (b) All frames of a message must contain a correct CRC check sum.
- (c) The last frame of a message must have bit 5 of the control byte set to '1'; all other frames must have it set to '0'.
- (d) Each frame in the message must have a legal address byte (always SFF) control byte (S03 or S13) and a legal facsimile control code.

6.6 Test History

The test history is a sequential listing of all communications between the tester and the UUT during test execution. A typical test history is shown in figure 6-4

There are three types of test history entries:

- (a) HDLC messages from the tester to the UUT are shown as a 3 or 6 letter entry in the TESTER column. The message abbreviation is compatible with appendix 2 and paragraph 5.3 of EIA standard RS466. The number in paranthesis indicates the status of the 'X' bit in the facsimile control byte of the message.

The STATUS column indicates the operational status of the FAXVAL program when the message was sent. It normally has no group 3 significance.

The FIF column lists the contents of the Facsimile Information Field (if any) of the message. Each pair of hex digits defines one 8-bit byte of the field, with bit 0 the first received or transmitted. For example, the FIF of the DIS message listed on line (01) of Figure 6-4 is:

bit 1	0	}	no. T.2 operation
(first revd)	0		
	0		
	0	}	no T.3 operation
	0		
	0		
	0		
	0		
	1		RS465 transmitter
	1		RS465 receiver
	1	}	V.27 ter and V.29 operation
	1		
	0		
	0		
	0		Vertical resolution = 3.85 l/mm
	0		One dimensional coding
	0	}	Maximum paper width = 297mm
	1		
	1	}	Maximum paper length = 364mm
	0		
	0	}	Minimum scan line time = 10MS @ 3.85l/mm
	1		
	1		
bit 24	0		No extended field

(b) HDLC messages from the UUT to the tester have the same format, with the message abbreviation listed in the UUT column.

RAA: AMQ93Q-67943-DP-E

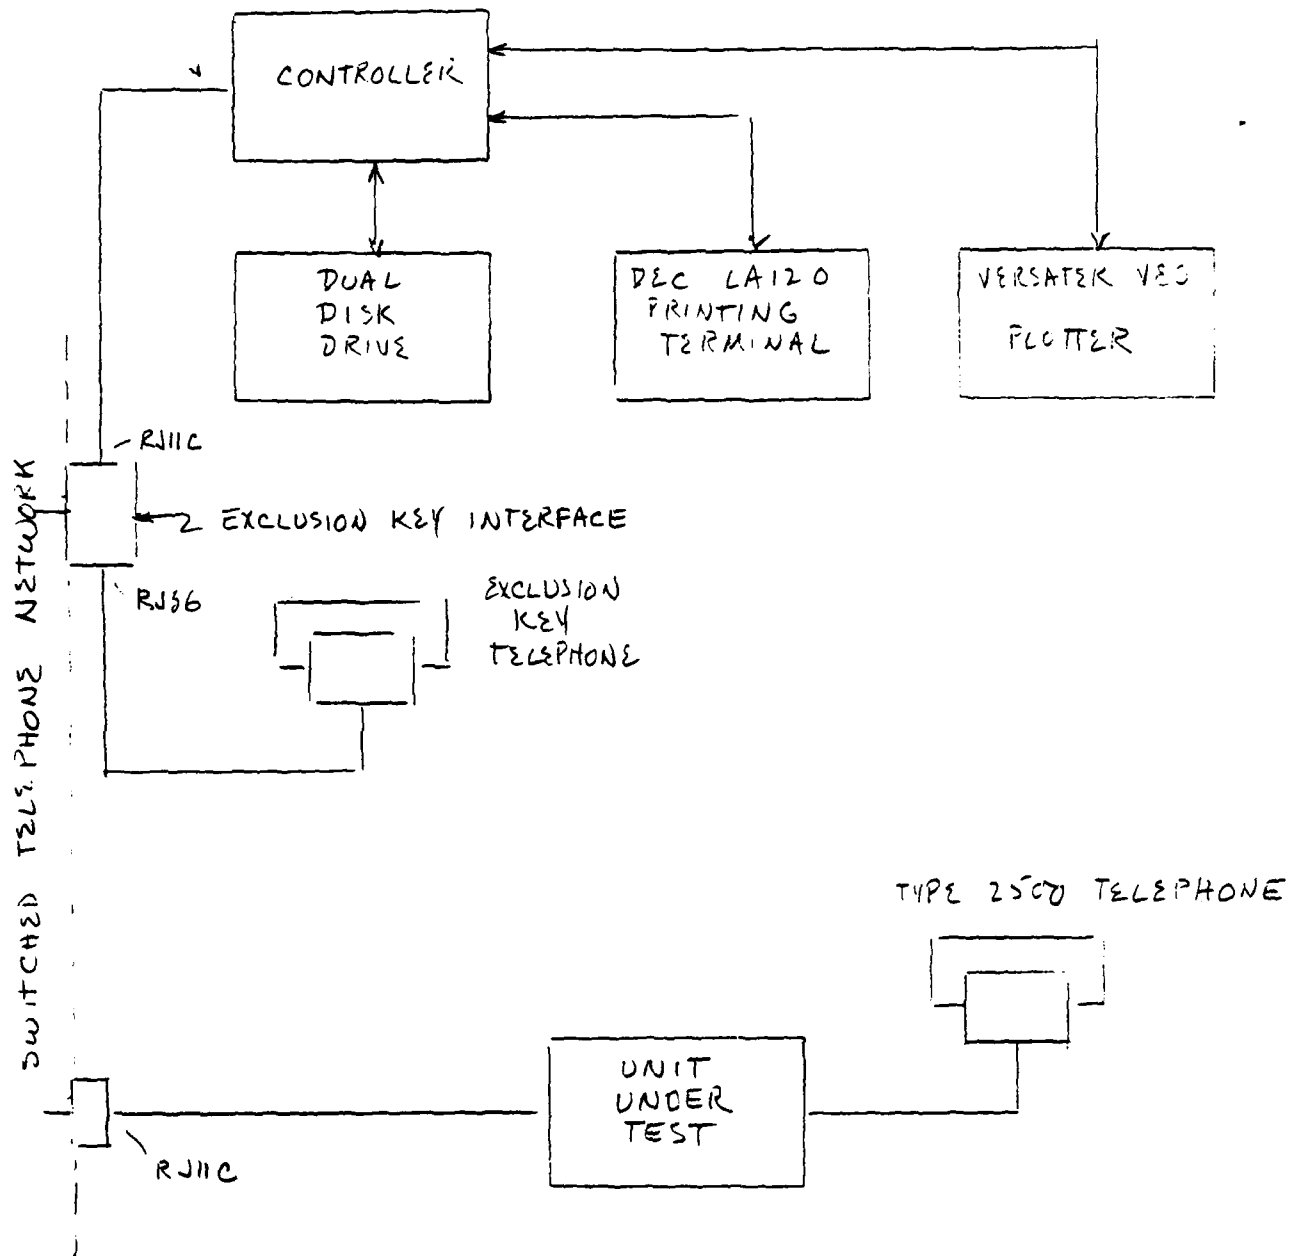


FIGURE 6-1 TYPICAL TEST CONFIGURATION

LT

TEST	METH	TESTER	UUT	DOC EXCG	CALLER	DOC ORG	PAGES	TEST ERRORS
1	1T	MNL	MNL	NO	UUT	UUT	1	09
2	2T	MNL	AUTO	NO	TESTER	TESTER	1	10
3	3T	AUTO	MNL	NO	TESTER	TESTER	1	05
4	4R	AUTO	AUTO	NO	TESTER	UUT	1	01-04-06
5	4R	AUTO	AUTO	NO	UUT	TESTER	2	13
6	4T	AUTO	AUTO	NO	TESTER	TESTER	2	08
7	4T	AUTO	AUTO	NO	UUT	UUT	2	02-06
8	4R/T	AUTO	AUTO	YES	TESTER	BOTH	2,2	NONE
9	NA	AUTO	AUTO	NO	UUT	NONE	NONE	07
A	NA	AUTO	AUTO	NO	UUT	NONE	NONE	12

DLE

TEST CONDITIONS/INSERTED ERRORS DESCRIPTION:

BYTE: ERRORS1

01. BIT 0 = TESTER IGNORES DIS ONCE
02. 1 = TESTER IGNORES MPS, EOM, OR EOP ONCE
03. 2 = GENERATE ONE MPS WITH CRC ERROR
04. 3 = IGNORE MPS, EOM OR EOP. SEND CRP
05. 4 = GENERATE FALSE FAX CONTROL CODE IN ONE EOP
06. 5 = GENERATE ONE CFR WITH \$03 2ND BYTE
07. 6 = DIS NOT SENT, MEASURE T1
08. 7 = EOP NOT SENT, MEASURE T2

BYTE: ERRORS2

09. BIT 0 = RESPOND PIN TO FAX. MEASURE T3
10. 1 = SEND PRI-EOP AFTER FAX
11. 2 = TRANSMIT CSI/CIG FRAME
12. 3 = SEND ILLEGAL COMMAND TO PROVOKE DISCONNECT
13. 4 = DEGRADE LINE TO PROVOKE DATA RATE FALLBACK (MANUAL)
14. 5 = EXTENDED FIF
15. 6 = SEND NSF FRAME WITH DIS
16. 7 = UNASSIGNED

DLP

09 COMPRESSION CODE: HUFFMAN
0A MIN SCAN LINE TIME: 10/5 MS
0B VERT RESOLUTION: 3.85 LI/MM
0C MAX PAPER WIDTH: 216 MM (1728 PELS)
0D MAX PAPER LENGTH: 364 MM
0E DATA SIGNALING RATE: 4800 BPS
0F PREAMBLE DURATION: 0.86 SEC
10 TX TEST DOCUMENT: 01
11 TCF/FAXIN RESPONSE: CFR/MCF
12 TX BIT RATE FALLBACK: ENABLED
13 OPTIONAL FRAMES: NONE
14 EXTENDED FIF: NO (3 BYTES)
15 AUTO TEST ERRORS: DISABLED

TEST	OF METHOD	TESTER	CALLING STA	DOC ORIG	PAGES	TEST ERROR	COMP CODE	MINIMUM SCAN	LINE TIME (MS)	VERTICAL RESOLUTION (L/MM)	MAX PAPER WIDTH (MM)	MAX PAPER LENGTH (MM)	DATA RATE (BPS)	PREAMBLE DURATION (SEC)	TX TEST DOCUMENT	TCF / FAX IN RESPONSE	TX BIT RATE	OPTIONAL FRAMES	EXTENDED FIF	TEST ERROR	ENABLED
1	IT	MAN	MAN	OUT	1	9		0					9600	0.86	LX	CFR/MCF	ENR	NSF	NO	NO	NORMAL RX OPERATION. CHECK NSF OPTIONAL FRAME
1	"	"	"	"	"	"							"	"	"	"	"	NONE	"	YES	TESTER RESPONDS PIN TO FAX. UUT SHOULD ISSUE OPERATOR ALERT AND DISCONNECT AFTER T3
2	2T	MAN	AUTO	TST	1	10							"	"	"	"	"	"	"	YES	TESTER SENDS PRI-EOP AFTER FAX. UUT SHOULD ISSUE OPERATOR ALERT.
2	"	"	"	"	"	"							"	"	"	"	"	"	"	YES	OPERATOR RESPONSE TO UUT ALERT. UUT SHOULD TRANSMIT PIN OR PIP.
3	3T	AUTO	MAN	TST	1	5							"	1.14	1	"	"	"	"	YES	TESTER GENERATES FALSE FACSIMILE CONTROL CODE IN ONE EOP MESSAGE
4	4K	AUTO	AUTO	TST	1	14-6							"	"	"	"	"	"	"	YES	TESTER IGNORES ONE DIS MESSAGE, SENDS CRP AFTER FAX, SENDS CFR WITH WRONG CONTROL BYTE.
4	"	"	"	"	"	"							"	"	"	"	"	"	"	NO	NO DOCUMENT READY AT UUT
4	"	"	"	"	"	"							2400	"	"	"	"	"	"	NO	TESTER RESPONDS FIT TO PRETRAIN UNTIL UUT DROPS BIT RATE TO 2400.
1	"	"	"	"	"	"							9600	"	"	FTT/RIN	"	"	"	NO	TESTER RESPONDS FIT TO ALL PRETRAINS, RTN TO ALL FAX TRANSMISSIONS.
4	"	"	"	"	"	"		40					9600	"	"	CFR/MCF	"	"	"	NO	CHECK UUT ABILITY TO INSERT FILL. (CHECK WITH LL OR PV KEYBOARD CMD)
5	4K	AUTO	AUTO	UUT	2	13		5					"	0.86	2	CFR/MCF	"	"	"	YES	LINE ATTENUATOR MANUALLY ADJUSTED TO PROVIDE UUT TO FIT RESPONSE TO PRETRAIN CHECK NSF OPTIONAL
6	4T	AUTO	AUTO	TST	2	8							"	"	"	"	"	"	"	YES	TESTER DOES NOT SEND EOP AFTER FAX. UUT SHOULD DISCONNECT AFTER T2.
7	4T	AUTO	AUTO	TST	2	2-6							"	1.14	"	"	"	"	"	YES	TESTER IGNORES MP/EOP/EOM AFTER FAX ONCE, SENDS CFR WITH WRONG CONTROL BYTS.
8	4K/4T	AUTO	AUTO	TST	2	-							"	"	1	"	"	NSF, CSI, CIG	"	YES	CHECK PROTOCOL FOR 2 PAGE TX, 2 PAGE RX. CHECK OPTIONAL FRAMES

Figure 6-3 Test Summary (Sheet 1 of 2)

TEST	OF METHOD	TESTER	UUT	CALLING STA	DOC ORIG	PAGES	TEST ERROR	COMP CODE	MINIMUM SCALE	LINE TIME (MS)	VERTICAL RESOLUTION (L/MM)	MAX PAPER WIDTH (MM)	MAX PAPER LENGTH (MM)	DATA RATE (BPS)	PREAMBLE DURATION (SEC)	TX TEST DOCUMENT	TCF / FAX IN RESPONSE	TX BIT RATE	OPTIONAL FRAMES	EXTENDED PIF	TEST ERROR ENABLED	TESTER COMMENTS
9	-	AUTO AUTO UUT	-	-	-	1	7														YES	TESTER DOES NOT TRANSMIT DIS. UUT SHOULD DISCONNECT AFTER T1
A	-	AUTO AUTO UUT	-	-	-	1	12														YES	TESTER SENDS ILLEGAL COMMAND IN PLACE OF DIS. UUT SHOULD DISCONNECT

NOTE: Undefined parameters set as MOD by UUT or to other values to test UUT response.

6-35

AD-A120 201

DELTA INFORMATION SYSTEMS INC JENKINTOWN PA
DEVELOPMENT OF A SYSTEM TO VALIDATE GROUP 3 FACSIMILE EQUIPMENT--ETC(U)
JUL 82

F/G 17/2

DCA100-81-C-0023

UNCLASSIFIED

NCS-TIB-82-4

NL

2 of 2

40 A
120201

END
DRI
FALMED
11-82
DTIC

```

TEST:
01 OPERATING METHOD:      01
02 CALLING UNIT:        1T ; MNL-MNL
03 DOCUMENT EXCHANGE:    UUT
04 PAGES / DOCUMENT:     NO
05 DOCUMENT ORIGINATOR:  1
06 ERRORS1:              UUT
07 ERRORS2:              00
08 ERRORS3:              01
09 COMPRESSION CODE:     00
10 MIN SCAN LINE TIME:   HUFFMAN
11 VERT RESOLUTION:      10/5 MS
12 MAX PAPER WIDTH:      3.85 LI/MM
13 MAX PAPER LENGTH:     297 MM (2432 PELS)
14 DATA SIGNALING RATE: 364 MM
15 PREAMBLE DURATION:    9600 BPS
16 TX TEST DOCUMENT:     1.14 SEC
17 TCF/FAXIN RESPONSE:   LAST RECEIVED
18 TX BIT RATE FALLBACK: CFR/MCF
19 OPTIONAL FRAMES:      ENABLED
20 EXTENDED FIF:         NONE
21 AUTO TEST ERRORS:     NO (3 BYTES)
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645
2646
2647
2648
264
```

7. ACCEPTANCE TEST

The acceptance test consisted of a series of tests run on a Burroughs DEX5100 facsimile machine. The DEX 5100 was colocated with the Facsimile Validation equipment. Communication between them was through the local switched telephone network as shown in figure 6-1.

The DEX 5100 tested had only one-dimensional (Huffman) . data coding implemented, and so additional tests were performed on a remotely located Burroughs 3600 machine to demonstrate two-dimensional (Modified Read) data transfers and decoding capability.

The acceptance test demonstrated all of the Facsimile Validation tests. While the form of the acceptance test was generally that which would be followed during an actual group 3 compliance test, the parameter and test sequence selection was made to demonstrate the capabilities of the Facsimile Validation equipment, and not to establish the group 3 compliance of the DEX5100.

The following is a brief description of the acceptance test operations and comments on the test results. Page references refer to the acceptance test printouts in Appendix A.

7.1 Initial Operations

a) Page 1 contains the test list, the Error description list, and the Parameter list which are normally printed at the start of a test for later reference.

b) Pages 2 through 4 show 'Change Parameter' (CP) operations demonstrating the available parameter settings.

c) Page 5 shows entry of the auto-dial number (DN), the International Telephone Number (TN), the Non-standard FIF (NS), and the UUT Identification data (SI). The remainder of page 5 and page 6 show selection of test 1 and initial parameter selection.

7.2 Test 1 (Errors disabled)

a) Page 7 shows the test results printout for test 1 with Auto Test Errors disabled. The format is that used for all test results: UUT identification line, test description and parameter list, and test history. The message abbreviations in the test history are these shown in EIA RS-466, appendix 2.

b) The UUT did not respond to the first DIS message (test history line 01) because it was not enabled until the test operator heard that message tone sequence. The tester repeated the DIS message (line 03) after a T4 timeout (4.5 seconds because the tester was in manual mode.)

c) The DIS message FIF was 3 bytes (24 bits) because of parameter 14. The '00 OF 66' FIF translates to bits 1 through 24 as shown below (refer to EIA RS 466, Table 2):

Bit 1 - 0
0
0
0
0
0
0

1 RS465 transmitter
1 RS465 receiver
1 } V27. ter and V29 signaling capability
1 }
0
0
0 Vertical resolution = 3.85 l/mm
0 One demensional coding

0 } Maximum paper width = 297 mm
1 }
1 } Maximum paper length = 364 mm
0 }
0 }
1 } Minimum scan line time = 10 ms @ 3.85 l/mm
1 }

bit 24- 0 no extended field

d) The number in parenthesis after each message indicates the state of the first bit (sometimes the X bit) in the facsimile control field of that message.

e) The UUT responded DCS (line 04) followed by a TCF period of approximately 1.8 seconds. (line 05). The DCS FIF translates to:

Bit 1 - 0
0
0
0
0
0
0
0
0

0
1 - RS 465 Receiver
1 }
0 } 9600 BPS
0 }
0 } Max paper width 216 mm
0 }
0 - Vertical resolution = 3.85 l/mm
0 - one dimensional coding

```

0} Maximum paper width = 216 mm
0}
1} Maximum paper length = 364 mm
0}
1} Minimum scan line = 5 ms
0}
0}
1 - Extended field

0 - 300 BPS handshaking
0 - Compressed data
0
0
0
0
0
0
0

```

f) The tester confirmed the TCF (line 06) and received FAX data (line 07).

g) The UUT transmitted an 'End of Procedure' (line 08) after the FAX data. The tester confirmed receipt (line 09), and the UUT disconnected (line 0A).

7.3 Test 1 (Errors Enabled)

a) Page 8 shows AUTO TEST ERRORS enabled and test 1 run again.

b) Page 9 shows the test results. After receipt of EOP from the UUT, the tester responded PIN (test Error 09). The UUT issued an audible operator alert and disconnected after a timeout (T3 in group 3 protocol) of approximately 15.8 seconds.

7.4 Test 2 (no operator intervention at UUT)

a) Page 10 shows test 2 selection and Run enable.

b) Page 11 shows the test results. The tester received a message containing an NSF frame (discarded) and a DIS frame. It responded with a DCS, TCF sequence to the UUT which confirmed a successful train by CFR.

The tester transmitted one page of facsimile data (that received in test 1 above because of parameter 10), and then transmitted PRI-EOP to the UUT to initiate an operator alert. The UUT did issue an audible operator alert which was not answered. The UUT issued no response to the tester, which disconnected after two re-transmissions.

7.5 Test 2 (Operator intervention at UUT)

a) Page 12 shows the results of repeating test 2 with operator intervention at the UUT when it issues the audible alert. The operator intervention caused a PIP response.

7.6 Test 3

a) Page 13 shows selection of test document 1 for transmission and the selection and Run enable of test 3.

b) Page 14 shows the test results. A false facsimile control code was generated in the first EOP message. The UUT ignored this message, but accepted the correct retransmission.

7.7 Test 4 (normal error operation)

a) Page 15 shows selection of Test 4, which polls the UUT, and the RUN enable.

b) Page 16 shows the test results.

The tester ignored the first DIS from the UUT (line 03) and accepted the retransmission.

b) The tester generated an incorrect CFR response (line 09) to a DCS, TCF sequence from the UUT. The UUT retransmitted the sequence.

c) The tester ignored the first EOM after receipt of facsimile data (line 10). The UUT retransmitted the EOM.

d) Page 17 shows the execution of a 'PV' keyboard command which causes the document received during this test to be printed on the Versatec V80. The decode routine prints:

1. the shortest decoded line (35 bits)
2. the total number of lines decoded (523)
3. the number of lines which did not decode to the proper length (4).

7.8 Test 4 (no document at UUT)

a) Page 18 shows the results of running test 4 with no TX document available at the UUT.

7.9 Test 4 (polling the UUT from a 2400 bit machine)

a) Pages 20 and 21 show the results of running test 4 with the tester signaling rate set to 2400 bps. The test history overflowed page 20 and was printed again in its entirety on page 21.

b) The UUT transmitted a DCS, TCF pretrain sequence at 9600 BPS (line 07), 7200 BPS (line 0A) and 4800 BPS (line 0D). The tester responded FTT to each of these.

c) The UUT tried 2400 BPS at line 10. The tester trained at this bit rate, and the remainder of the test was similar to 7.8 above.

7.10 Test 4 (9600 BPS signaling rate with one FTT response)

a) Page 23 shows the results of running test 4 with the tester signaling rate set to 9600 BPS and parameter 11 set to force one FTT response to a DCS, TCF pretrain and one RTN response to a facsimile data transfer.

b) The FTT response at test history line 09 caused the UUT to re-train at 7200 BPS (line 0A, 0B). The RTN response (line 17) was unanswered in the T2 timeout period.

7.11 Test 4 (7200 BPS with constant FTT responses)

a) Page 25 shows the results of running test 4 with parameter 11 set to force FTT responses to all pretrain sequences from the UUT. The UUT transmitted the pretrain sequence at 9600 BPS, 7200 BPS, 4800 BPS, and 2400 BPS. Having failed to train the tester at any of these bit rates, the UUT disconnected.

7.12 Test 4 (minimum scan line times set to 0 ms and 40 ms)

a) Pages 26 and 27 shown the results of running test 4

to obtain data from the UUT with two minimum scan line times: 0 ms and 40 ms. After each test the resulting data was decoded using the 'LL' keyboard command to obtain the minimum number of bits per line received. The data received at 0 ms/line had a minimum line length of 32 bits, and the same document transmitted with the 40 ms/line requirement had enough fill inserted to increase the minimum coded scan line to 172 bits (approximately 17 ms)

7.13 Test 5

a) Pages 29 and 30 show the results of running test 5, which requires a manual adjustment of the TX line attenuator to stimulate the UUT to issue a FTT response. The test history overflowed page 29 and is repeated in its entirety on page 30.

The tester received no response to the first two pre-train sequences (line 06 through 0B), probably because the attenuation was too great. A FTT response was received at line 0E, provoking a bit rate fallback to 7200 BPS. Two pages of facsimile data were then transmitted normally.

7.14 Test 6

a) Page 32 shows the results of running test 6 with errors enabled. The tester did not transmit an EOM message after the facsimile data (line 0F), and the UUT disconnected after a timeout (group 3 T2) of approximately 14 seconds.

b) Page 34 shown the results of running test 6 with errors disabled to demonstrate transmission of two pages of facsimile data to the UUT.

7.15 Test 7

a) Page 35 shows the results of running test 7 with errors disabled to demonstrate receipt of two pages of facsimile data from the UUT. Parameter 13 was set to generate an NSF frame with each DIS message until a response was received from the UUT.

B) Pages 38 and 39 show the results of running test 7 with errors enabled. The test history overflowed page 38, and is repeated in its entirety on page 29. The errors are inserted at line 0E and 15.

7.16 Test 8

Test 8 has no test errors implemented. It is designed to demonstrate a 2 page document exchange between the Tester and the UUT. Parameter 13 was set to enable NSF, CSI, and CIG optional frames. The test results are shown on pages 41 and 42.

7.17 Test 9

Test 9 is designed to measure the UUT T1 timeout by inhibiting the DIS message from the Tester. The test result on page 44 shows a T1 timeout of approximately 49 seconds.

7.18 Test A

Test A is designed to provoke the UUT to disconnect by transmitting an illegal command in place of DIS. Page 46 shows the test results. The UUT did disconnect after the first CFR. The test was then aborted using the 'AB' keyboard command.

7.19 Test 1 (Modified Read coding)

Test 1 was run on a remote machine (Burroughs 3600) which had 2D (Modified Read) data coding capability. Facsimile data was successfully received and stored. Test results are shown on page 47. A 'PV' keyboard command demonstrated the capability of decoding and printing the 2D data (figure 7-3).

7.20 Test 2 (Modified Read coding)

The 2D data received in 7.19 above was successfully transmitted back to the remote machine using test 2. Test results are shown on page 48.

Table of Contents

Guide To The Basic dex® 5100

	Page
I. 5100 Operation	
To Send	2
To Be Polled	2
To Receive	2
To Poll	2
To Use Voice Mode	2
II. 5100 Operator Maintenance	
Low Supply	3
Adding Receive Paper	3
Adding Toner	4
Adding Water	4
Fault Modes	5
Clearing Send Fault	5
Clearing Receive Fault	5
Self-Test	5

Guide To dex® 5100 Options

Guide to the dex® 5100 Auto Dial Option

I. 5100 Auto Dialer Operation	
To Send or Receive with Individual Telephone Numbers	10
To Poll Using the Directory	11
To Send Using the Directory	12
II. 5100 Auto Dialer Programming	
Function 1 — Setting the Clock	13
Function 2 — Programming the Directory	13

Figure 7-1 Typical FAX to UUT (result of test 2)

dex® Auto Dial Command Work Sheet

[illegible]

Figure 7-2 V80 Printout (result of test 3)

82. 04/09 10:44 PM

The requirement for high speed message facsimile equipment to be used with the DDD switched network is being satisfied by various techniques of information redundancy removal. These techniques are varied in nature and are known by such names as "run length encoding", "white skipping", etc. Each technique offers different advantages in terms of information compression which in turn relates directly to document transmission time. The Electronic Industries Association is chartered to provide industrial standards which not only assure compatibility of equipments but provide the user with a reference upon which to base comparison of equipment. In recognition of the confusion which can arise in comparing equipment for transmission time when such time is a function of information content, EIA has proposed this document as a transmission time reference standard. This letter contains three hundred words and is a statistical average document.

Figure 7-3 Modified READ V80 Printout

APPENDIX A

Acceptance Test Print-outs

LT

TEST	METH	TESTER	UUT	DOC	EXCG	CALLER	DOC	ORG	PAGES	TEST ERRORS
1	1T	NML	NML	NO		UUT	UUT		1	09
2	2T	NML	AUTO	NO		TESTER	TESTER		1	10
3	3T	AUTO	NML	NO		TESTER	TESTER		1	05
4	4R	AUTO	AUTO	NO		UUT	UUT		1	01-04-04
5	4R	AUTO	AUTO	NO		TESTER	TESTER		2	13
6	4T	AUTO	AUTO	NO		TESTER	TESTER		2	08
7	4T	AUTO	AUTO	NO		UUT	UUT		2	02-06
8	4R/T	AUTO	AUTO	YES		TESTER	90TH		2+2	NONE
9	NA	AUTO	AUTO	NO		UUT	NONE		NONE	07
A	NA	AUTO	AUTO	NO		UUT	NONE		NONE	12

>LE

TEST CONDITIONS/INSERTED ERRORS DESCRIPTION:

BYTE1 ERRORS1

01. BIT 0 - TESTER IGNORES DIS ONCE
02. 1 - TESTER IGNORES MP9, EOM, OR EOP ONCE
03. 2 - GENERATE ONE MP9 WITH CRC ERROR
04. 3 - IGNORE MP9, EOM OR EOP. SEND CRP
05. 4 - GENERATE FALSE FAX CONTROL CODE IN ONE EOP
06. 5 - GENERATE ONE CFR WITH 903 2ND BYTE
07. 6 - DIS NOT SENT, MEASURE T1
08. 7 - EOP NOT SENT, MEASURE T2

BYTE1 ERRORS2

09. BIT 0 - RESPOND PIN TO FAX. MEASURE T3
10. 1 - SEND PRI-EOP AFTER FAX
11. 2 - TRANSMIT CSI/CID FRAME
12. 3 - SEND ILLEGAL COMMAND TO PROVOKE DISCONNECT
13. 4 - DEGRADE LINE TO PROVOKE DATA RATE FALLBACK (MANUAL)
14. 5 - EXTENDED FIF
15. 6 - SEND NSF FRAME WITH DIS
16. 7 - UNASSIGNED

>LP

09	COMPRESSION CODE1	HUFFMAN
0A	MIN SCAN LINE TIME1	10/5 MS
0B	VERT RESOLUTION1	3.85 LI/MM
0C	MAX PAPER WIDTH1	216 MM (1728 PELS)
0D	MAX PAPER LENGTH1	364 MM
0E	DATA SIGNALING RATE1	4800 BPS
0F	PREAMBLE DURATION1	0.86 SEC
10	TX TEST DOCUMENT1	01
11	TCF/FAXIM RESPONSE1	CFR/MCF
12	TX BIT RATE FALLBACK1	ENABLED
13	OPTIONAL FRAMES1	NONE
14	EXTENDED FIF1	NO (3 BYTES)
15	AUTO TEST ERRORS1	DISABLED

CP09

09 COMPRESSION CODE1

HUFFMAN

MODIFIED READ

HUFFMAN

>CP0A

0A MIN SCAN LINE TIME1

0 MS

5 MS

10 MS

20 MS

40 MS

10/5 MS

20/10 MS

40/20 MS

>CP0B

0B VERT RESOLUTION1

7.70 LI/MM

3.85 LI/MM

A-2

>CP0C

0C MAX PAPER WIDTH1

216 MM (1728 PELS)

256 MM (2048 PELS)

297 MM (2432 PELS)

>CP0D

0D MAX PAPER LENGTH1

297 MM

364 MM

UNLIMITED

CP0E

OE DATA SIGNALING RATE: 2400 BPS
9600 BPS
4800 BPS
7200 BPS

>CP0F

OF PREAMBLE DURATION: 0.86 SEC
1.14 SEC

>CP10

10 TX TEST DOCUMENT: 01
02
03
LAST RECEIVED

>CP11

11 TCF/FAXIN RESPONSE: CFR/MCF
CFR/RTP
FTT/RTN THEN CFR/MCF
ALWAYS FTT/RTN
CFR/MCF

>CP12

12 TX BIT RATE FALLBACK: ENABLED
DISABLED

CP13

13 OPTIONAL FRAMES:

NONE
NSF WITH FIRST DIS
CIS/CIG WITH FIRST DIS/DTC
NSF,CST,CIG
NONE

>CP14

14 EXTENDED FIF

NO (3 BYTES)
YES (4 BYTES)

>CP15

15 AUTO TEST ERRORS:

ENABLED
DISABLED

DN5725639

TM12345678900987654321

MS12345ABCDE

91 BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

8 JULY 1982

ST01

TEST:

01 OPERATING METHOD: 01 ; HNL-MNL
02 CALLING UNIT: UUT
03 DOCUMENT EXCHANGE: NO
04 PAGES / DOCUMENT: 1
05 DOCUMENT ORIGINATOR: UUT
06 ERRORS: 00
07 ERRORS: 01
08 ERRORS: 00
09 COMPRESSION CODE: HUFFMAN
0A MIN SCAN LINE TIME: 40/20 MS
0B VERT RESOLUTION: 3.85 LI/MM
0C MAX PAPER WIDTH: 297 MM (2432 PELS)
0D MAX PAPER LENGTH: UNLIMITED
0E DATA SIGNALING RATE: 7200 BPS
0F PREAMBLE DURATION: 1.14 SEC
10 TX TEST DOCUMENT: LAST RECEIVED
11 TCF/FAXIN RESPONSE: CFR/MCF
12 TX BIT RATE FALLBACK: DISABLED
13 OPTIONAL FRAMES: NONE
14 EXTENDED FIF: YES (4 BYTES)
15 AUTO TEST ERRORS: DISABLED

A-5

CP0A

0A MIN SCAN LINE TIME: 40/20 MS
0 MS
5 MS
10 MS
20 MS
40 MS
10/5 MS

CP0E

0E DATA SIGNALING RATE: 7200 BPS
2400 BPS
9600 BPS

CP0B

0B MAX PAPER LENGTH: UNLIMITED
297 MM

364 MM

>CP12

12 TX BIT RATE FALLBACK? DISABLED
 ENABLED

>CP14

14 EXTENDED FIFO YES (4 BYTES)
 NO (3 BYTES)

>RURU

TEST RUNNING

>

9 JULY 1982

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:
 01 OPERATING METHOD: 01
 02 CALLING UNIT: UUT
 03 DOCUMENT EXCHANGE: NO
 04 PAGES / DOCUMENT: 1
 05 DOCUMENT ORIGINATOR: UUT
 06 ERRORS: 00
 07 ERRORS: 01
 08 ERS: 8631
 09 COMPRESSION CODE: HUFFMAN
 10 MIN SCAN LINE TIME: 10/5 MS
 11 VERT RESOLUTION: 3.85 LI/MM
 12 MAX PAPER WIDTH: 297 MM (2432 PELS)
 13 MAX PAPER LENGTH: 364 MM
 14 DATA SIGNALING RATE: 9600 BPS
 15 PREAMBLE DURATION: 1.14 SEC
 16 TX TEST DOCUMENT: LAST RECEIVED
 17 TCF/FAXIN RESPONSE: CFR/MCF
 18 TX BIT RATE FALLBACK: ENABLED
 19 OPTIONAL FRAMES: NONE
 20 EXTENDED FIF: NO (3 BYTES)
 21 AUTO TEST ERRORS: DISABLED

TESTER	UUT	STATUS	FIF
01. DIS (1)		00 00 02 01	00 OF 66
02. (14 TIMEDOUT)			
03. DIS (1)		00 00 02 00	00 OF 66
04. DCS (1)		00 00 02 01	00 OF 94 00
05. (TCF RCVD. NOT ALL ZEROS. DURATION (MS)=001804)			
06. CFR (0)		00 00 04 04	
07. (FAX RECEIVED)			
08. EOP (1)		00 00 08 02	
09. MCF (0)		00 00 20 00	
0A. DCN (1)		00 00 08 04	
0B. (END TEST)			

CP15

15 AUTO TEST ERRORS: DISABLED
ENABLED

15 AUTO TEST ERRORS: ENABLED

>8701

TEST:
01 OPERATING METHOD: 01
02 CALLING UNIT: 11, MNL-MNL
03 DOCUMENT EXCHANGE: UUT
04 PAGES / DOCUMENT: NO
05 DOCUMENT ORIGINATOR: 1
06 UUT
07 ERRORS: 00
08 ERRORS: 01
09 COMPRESSION CODE: HUFFMAN
10 MIN SCAN LINE TIME: 10/5 MS
11 VERT RESOLUTION: 3.95 LI/MM
12 MAX PAPER WIDTH: 297 MM (2432 PELS)
13 MAX PAPER LENGTH: 344 MM
14 DATA SIGNALING RATE: 9600 BPS
15 OF PREAMBLE DURATION: 1.14 SEC
16 TX TEST DOCUMENT: LAST RECEIVED
17 TCF/FAXIN RESPONSE: CFR/MCF
18 TX BIT RATE FALLBACK: ENABLED
19 OPTIONAL FRAMES: NONE
20 EXTENDED FIF: NO (3 BYTES)
21 AUTO TEST ERRORS: ENABLED

>KU

TEST RUNNING

8 JULY 1982

START TIMEOUT MEASUREMENT

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:
01 OPERATING METHOD: 17 # MNL-MNL
02 CALLING UNIT: UUT
03 DOCUMENT EXCHANGE: NO
04 PAGES / DOCUMENT: 1
05 DOCUMENT ORIGINATOR: UUT
06 ERRORS1: 00
07 ERRORS2: 01
08 ERRORS3: 00
09 COMPRESSION CODE: HUFFMAN
10 MIN SCAN LINE TIME: 10/5 MS
11 VERT RESOLUTION: 3.85 LI/MM
12 MAX PAPER WIDTH: 297 MM (2432 PELS)
13 MAX PAPER LENGTH: 384 MM
14 DATA SIGNALING RATE: 9600 BPS
15 PREAMBLE DURATION: 1.14 SEC
16 TX TEST DOCUMENT: LAST RECEIVED
17 TCF/FAXIN RESPONSE: CFR/MCF
18 TX BIT RATE FALLBACK: ENABLED
19 OPTIONAL FRAMES: NONE
20 EXTENDED FIF: NO (3 BYTES)
21 AUTO TEST ERRORS: ENABLED

A-9

TESTER	UUT	STATUS	FIF
01. DIS (1)		00 00 02 01	00 OF 66
02. (T4 TIMEOUT)			
03. DIS (1)		00 00 02 00	00 OF 44
04. BCS (1)		00 00 02 01	00 06 94 00
05. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)-001748)		00 00 04 04	
06. CFR (0)			
07. (FAX RECEIVED)			
08. EDP (1)		00 00 08 02	
09. PIM (0)		00 00 20 00	
0A. (T.C. RESPOND PIN, MEASURE T3)			
0B. (TIMEOUT (MS) = 015804)			
0C. (END TEST)			

BT02

TEST:
01 OPERATING METHOD:
02 CALLING UNIT:
03 DOCUMENT EXCHANGE:
04 PAGES / DOCUMENT:
05 DOCUMENT ORIGINATOR:
06 ERRORS:
07 ERRORS:
08 ERRORS:
09 COMPRESSION CODE:
0A MIN SCAN LINE TIME:
0B VERT RESOLUTION:
0C MAX PAPER WIDTH:
0D MAX PAPER LENGTH:
0E DATA SIGNALING RATE:
0F PREAMBLE DURATION:
10 TX TEST DOCUMENT:
11 TCF/FAXIN RESPONSE:
12 TX BIT RATE FALLBACK:
13 OPTIONAL FRAMES:
14 EXTENDED FIF:
15 AUTO TEST ERRORS:
02
2T I HML-AUTO
TESTER
NO
1
TESTER
00
00
00
HUFFMAN
10/5 MS
3.85 LI/MM
297 MM (2432 PELB)
364 MM
9600 BPS
1.1 SEC
LAST RECEIVED
CFR/MCF
ENABLED
NONE
NO (3 BYTES)
ENABLED

>RU

TEST RUNNING

BURROUGHS DEX 5100 (HAI) DUPLX CONFIDURATION

TEST:
 01 OPERATING METHOD: 02
 02 CALLING UNIT: TESTK
 03 DOCUMENT EXCHANGE: NO
 04 PAGES / DOCUMENT: 1
 05 DOCUMENT ORIGINATOR: TESTK
 06 ERRORS1: 00
 07 ERRORS2: 02
 08 ERRORS3: 00
 09 COMPRESSION CODE: HUFFMAN
 10 MIN SCAN LINE TIME: 10/5 HS
 11 VERT RESOLUTION: 3.85 LI/MM
 12 MAX PAPER WIDTH: 297 MM (2432 PELS)
 13 MAX PAPER LENGTH: 354 MM
 14 DATA SIGNALING RATE: 9600 BPS
 15 PREAMBLE DURATION: 1.14 SEC
 16 TX TEST DOCUMENT: LAST RECEIVED
 17 TCF/FAXIN RESPONSE: CFR/MCF
 18 TX BIT RATE FALLBACK: ENABLED
 19 OPTIONAL FRAMES: NONE
 20 EXTENDED FIF: NO (3 BYTES)
 21 AUTO TEST ERRORS: ENABLED

TESTER	UUT	STATUS	FIF
01.	NSF (0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
02.	DIB (0)	02 00 00 00	10 4E E4 00
03.	DCS (1)	04 00 00 00	00 07 26
04.	(TCF TRANSMITTED)		
05.	CFR (0)	04 02 00 00	
06.	(FAX TRANSMITTED)		
07.	PKI-EOP(1)	10 02 00 00	
08.	(T4 TIMEOUT)		
09.	PKI-EOP(1)	10 02 00 00	
0A.	(T4 TIMEOUT)		
0B.	PKI-EOP(1)	10 02 00 00	
0C.	(T4 TIMEOUT)		
0D.	DCN (1)	00 00 00 00	
0E.	(END TEST)		

OPERATOR ALERT

LINE REQUEST (KEY 1 = YES) (10 SEC DISCONNECT TIMEOUT)

> OPERATOR ALERT COMPLETE

>

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

8 JULY 1982

TEST1
01 OPERATING METHOD: 02
02 CALLING UNIT: 21 1 MNI-AUTO
03 DOCUMENT EXCHANGE: 1
04 PAGES / DOCUMENT: 1
05 DOCUMENT ORIGINATOR: 00
06 ERROR: 00
07 ERROR: 02
08 ERROR: 00
09 COMPRESSION CODE: HUFFMAN
10 MIN SCAN LINE TIME: 10/5 MS
11 VERT RESOLUTION: 3.85 LI/MM
12 MAX PAPER WIDTH: 297 MM (2432 FELS)
13 MAX PAPER LENGTH: 364 MM
14 DATA SIGNALING RATE: 9600 BPS
15 OF PREAMBLE DURATION: 1.14 SEC
16 TX TEST DOCUMENT: LAST RECEIVED
17 TCF/FAXIN RESPONSE: CFC/MCF
18 TX BIT RATE FALLBACK: ENABLED
19 OPTIONAL FRAMES: NONE
20 EXTENDED FIF: NO (3 BYTES)
21 AUTO TEST ERROR: ENABLED

A-12

TESTER	UNIT	STATUS	FIF
01.	NSF (0)	02 00 00 00	C8 B0 C0 00 00 17 00 00 00 00
02.	BIS (0)	02 00 00 00	18 4F E4 00
03.	BIS (1)	04 00 00 00	00 07 26
04.	(TCF TRANSMITTED)	(0)	
05.	CFR	04 02 00 00	
06.	(FAX TRANSMITTED)		
07.	FRI-EOF(1)	10 02 00 00	
08.	(T4 TIMEOUT)		
09.	FRI-EOF(1)	10 02 00 00	
0A.	FIF (0)	10 02 00 00	
0B.	(T3 TIMEOUT)		
0C.	(T1 TIMEOUT)		
0D.	(END TEST)		

```

CPOF
OF PREAMBLE DURATION: 1.14 SEC
0.84 SEC

>CP10
10 TX TEST DOCUMENT: LAST RECEIVED
01

>S103
TEST:
01 OPERATING METHOD: 3T 1 AUTO-MNL
02 CALLING UNIT: TESTER
03 DOCUMENT EXCHANGE: NO
04 PAGES / DOCUMENT: 1
05 DOCUMENT ORIGINATOR: TESTER
06 ERRORS1: 10
07 ERRORS2: 00
08 ERRORS3: 00
09 COMPRESSION CODE: HUFFMAN
0A MIN SCAN LINE TIME: 10/5 MS
0B VERT RESOLUTION: 3.85 LI/MM
0C MAX PAPER WIDTH: 297 MM (2432 PELS)
0D MAX PAPER LENGTH: 364 MM
0E DATA SIGNALING RATE: 9600 BPS
0F PREAMBLE DURATION: 0.86 SEC
10 TX TEST DOCUMENT: 01
11 TCF/FAXIN RESPONSE: CFR/MCF
12 TX BIT RATE FALLBACK: ENABLED
13 OPTIONAL FRAMES: NONE
14 EXTENDED FIF: NO (3 BYTES)
15 AUTO TEST ERRORS: ENABLED

>RU
TEST RUNNING

```

8 JULY 1982

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST1	03	3T 1 AUTO-MNL
01 OPERATING METHOD:	TESTER	
02 CALLING UNIT:	MD	
03 DOCUMENT EXCHANGE:	1	
04 PAGES / DOCUMENT:	TESTER	
05 DOCUMENT ORIGINATOR:	10	
06 ERRORS:	00	
07 ERRORS2:	00	
08 ERRORS3:	HUFFMAN	
09 COMPRESSION CODE:	10/5 MB	
0A MIN SCAN LINE TIME:	3.83 LI/MM	
0B VERT RESOLUTION:	297 MM (2432 PELS)	
0C MAX PAPER WIDTH:	364 MM	
0D MAX PAPER LENGTH:	9600 BPS	
0E DATA SIGNALING RATE:	0.86 SEC	
0F PREAMBLE DURATION:	01	
10 TX TEST DOCUMENT:	CFR/MCF	
11 TCF/FAXIN RESPONSE:	ENABLED	
12 TX BIT RATE FALLBACK:	NONE	
13 OPTIONAL FRAMES:	MD (3 BYTES)	
14 EXTENDED FIF:	ENABLED	
15 AUTO TEST ERRORS:		

TESTER	UNIT	STATUS	FIF
01.	MSF (0)	02 00 00 00	C8 H0 C0 00 00 17 00 00 00 00
02.	DIS (0)	02 00 00 00	18 4F E4 00
03.	DCS (1)	04 00 00 00	00 07 26
04.	(TCF TRANSMITTED)		
05.	CFR (0)	04 02 00 00	
06.	(FAX TRANSMITTED)		
07.	(T.C. FALSE EOP CODE GENERATED)	10 02 00 00	
08.	EQP (1)		
09.	(T4 TIMEOUT)		
0A.	EOP (1)	10 02 00 00	
0B.	MCF (0)	10 02 00 00	
0C.	DCM (1)	80 00 00 00	
0D.	(END TEST)		

ST04

TEST:	04	4R 1 AUTO-AUTO
01 OPERATING METHOD:	4R	1 AUTO-AUTO
02 CALLING UNIT:	TESTER	
03 DOCUMENT EXCHANGE:	NO	
04 PAGES / DOCUMENT:	1	
05 DOCUMENT ORIGINATOR:	UUT	
06 ERROR81:	29	
07 ERROR82:	00	
08 ERROR83:	00	
09 COMPRESSION CODE:	HUFFMAN	
0A MIN SCAN LINE TIME:	10/5 MS	
0B VERT RESOLUTION:	3.85 LI/MM	
0C MAX PAPER WIDTH:	297 MM (2432 PELS)	
0D MAX PAPER LENGTH:	364 MM	
0E DATA SIGNALING RATE:	9600 BPS	
0F PREAMBLE DURATION:	0.86 SEC	
10 TX TEST DOCUMENT:	01	
11 TCF/FAXIN RESPONSE:	CFR/MCF	
12 TX BIT RATE FALLBACK:	ENABLED	
13 OPTIONAL FRAMES:	NONE	
14 EXTENDED FIF:	NO (3 BYTES)	
15 AUTO TEST ERRORS:	ENABLED	

>RU

TEST RUNNING

9 JULY 1982

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TESTER	UNIT	STATUS	FIF
01. OPERATING METHOD:	NSF (0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
02. CALLING UNIT:	DTS (0)	02 00 00 00	1B 4F E4 00
03. DOCUMENT EXCHANGE:	NSF (0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
04. PAGES / DOCUMENT:	DTS (0)	02 00 00 00	1B 4F E4 00
05. DOCUMENT ORIGINATOR:	DCS (1)	00 00 02 01	00 0F 46
06. ERROR:	DCS (0)	00 00 02 01	00 06 94 00
07. ERROR:	DCS (0)	00 00 08 01	00 06 94 00
08. ERROR:	DCS (0)	00 00 08 01	00 06 94 00
09. COMPRESSION CODE:	EDM (0)	00 00 04 04	00 06 94 00
10. MIN SCAN LINE TIME:	EDM (0)	00 00 08 02	00 06 94 00
11. VERT RESOLUTION:	EDM (0)	00 00 08 02	00 06 94 00
12. MAX PAPER WIDTH:	EDM (0)	00 00 08 02	00 06 94 00
13. MAX PAPER LENGTH:	EDM (0)	00 00 08 02	00 06 94 00
14. DATA SIGNALING RATE:	EDM (0)	00 00 08 02	00 06 94 00
15. PREAMBLE DURATION:	EDM (0)	00 00 08 02	00 06 94 00
16. TX TEST DOCUMENT:	EDM (0)	00 00 08 02	00 06 94 00
17. TCF/FAXIN RESPONSE:	EDM (0)	00 00 08 02	00 06 94 00
18. TX BIT RATE FALLBACK:	EDM (0)	00 00 08 02	00 06 94 00
19. OPTIONAL FRAMES:	EDM (0)	00 00 08 02	00 06 94 00
20. EXTENDED FIF:	EDM (0)	00 00 08 02	00 06 94 00
21. AUTO TEST ERROR:	EDM (0)	00 00 08 02	00 06 94 00

PV
>PRINTING FAX
(MINIMUM CODED LINE LENGTH (BITS) = 000035)
(ERROR LINES/TOTAL LINES = 000004 /000523)
>PRINTING FAX
NEXT PAGE INVALID

RU
TEST RUNNING
>

8 JULY 1982

BURROUGHS BEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:	04			
01 OPERATING METHOD:	4R 1 AUTO-AUTO			
02 CALLING UNIT:	TESTER			
03 DOCUMENT EXCHANGE:	NO			
04 PAGES / DOCUMENT:	1			
05 DOCUMENT ORIGINATOR:	UUT			
06 ERRORS:	29			
07 ERRORS:	00			
08 ERRORS:	00			
09 COMPRESSION CODE:	HUFFMAN			
0A MIN SCAN LINE INE:	10/5 MS			
0B VERT RESOLUTION:	3.85 LI/MM			
0C MAX PAPER WIDTH:	297 MM (2432 PELS)			
0D MAX PAPER LENGTH:	364 MM			
0E DATA SIGNALING RATE:	9600 BPS			
0F PREAMBLE DURATION:	0.86 SEC			
10 TX TEST DOCUMENT:	01			
11 TCF/FAXIM RESPONSE:	CFR/MCF			
12 TX BIT RATE FALLBACK:	ENABLED			
13 OPTIONAL FRAMES:	NONE			
14 EXTENDED FIF:	NO (3 BYTES)			
15 AUTO TEST ERRORS:	ENABLED			

TESTER	UUT	STATUS	FIF
01.	MSF (0)	02 00 00 00	C8 80 C0 00 00 17 00 00 00 00
02.	DIS (0)	02 00 00 00	10 4E F4 00
03. (T.C. IGNORE DIS)	MSF (0)	02 00 00 00	C8 80 C0 00 00 17 00 00 00 00
04.	DIS (0)	02 00 00 00	10 4E F4 00
05.	DIS (1)	00 00 02 10	00 0F 66
06. DTC	MSC (1)	00 00 02 01	C8 80 C0 00 00 17 00 00 00 00
07.	DTC (1)	00 00 02 01	10 4E F4 00
08.	DCN (1)	00 00 80 00	
09. (END TEST)			

CPOE

OE DATA SIGNALING RATE: 9600 BPS
4800 BPS
7200 BPS
2400 BPS

RU

TEST RUNNING

8 JULY 1982

BURKOWS DEX 5100 (HALF DUPLEX CONFIGURATION)

TESTS

01 OPERATING METHOD: 04
 02 CALLING UNIT: 4R 1 AUTO-AUTO
 03 DOCUMENT EXCHANGE: TESTER
 04 PAGES / DOCUMENT: NO
 05 DOCUMENT ORIGINATOR: 1
 06 ERRORS: 29
 07 ERROR82: 00
 08 ERROR83: 00
 09 COMPRESSION CODE: HUFFMAN
 0A MIN SCAN LINE TIME: 10/5 MS
 0B VERT RESOLUTION: 3.85 LI/MM
 0C MAX PAPER WIDTH: 297 MM (2432 PELS)
 0D MAX PAPER LENGTH: 364 MM
 0E DATA SIGNALING RATE: 2400 BPS
 0F PREAMBLE DURATION: 0.86 SEC
 10 TX TEST DOCUMENT: 01
 11 TCF/FAXIN RESPONSE: CFR/MCF
 12 TX BIT RATE FALLBACK: ENABLED
 13 OPTIONAL FRAMES: NONE
 14 EXTENDED FIF: NO (3 BYTES)
 15 AUTO TEST ERRORS: ENABLED

A-20

TESTER	UNIT	STATUS	FIF
01.	MSF (0)	02 00 00 00	C8 80 C0 00 00 17 00 00 00 00
02.	DIS (0)	02 00 00 00	18 4F E4 00
03.	(T.C. IGNORE DIS)	02 00 00 00	
04.	MSF (0)	02 00 00 00	C8 80 C0 00 00 17 00 00 00 00
05.	DIS (0)	02 00 00 00	18 4F E4 00
06.	BIT (1)	00 00 02 10	00 0F 66
07.	DCS (0)	00 00 02 01	00 06 94 00
08.	(NO CORRECT CARRIER IN 10 SECONDS)		
09.	FTT (1)	00 00 04 04	
0A.	DCS (0)	00 00 08 01	00 0E 94 00
0B.	(NO CORRECT CARRIER IN 10 SECONDS)		
0C.	FTT (1)	00 00 04 04	
0D.	DCS (0)	00 00 08 01	00 0A 94 00
0E.	(NO CORRECT CARRIER IN 10 SECONDS)		
0F.	FTT (1)	00 00 04 04	
10.	DCS (0)	00 00 08 01	00 02 94 00
11.	(ICF RCVD, NOT ALL ZEROS. DURATION (MS)=001610)		
12.	(T.C. NO BIT 5 IN CFR CONTROL BYTE)		
13.	CFR (1)	00 02 04 04	
14.	DCS (0)	00 00 08 01	00 02 94 00
15.	(ICF RCVD, NOT ALL ZEROS. DURATION (MS)=001622)		
16.	CFR (1)	00 00 04 04	
17.	(FAX RECEIVED)		
18.	EOM (0)	00 00 08 02	
19.	(T.C. IGNORE MFS-FUN-ENF, SEND LRF)		
1A.	CRF (1)	00 00 08 02	
1B.	EOM (0)	00 00 08 02	
1C.	MCF (1)	00 00 20 00	
1D.	(12 TIME OUT)		

LM

TESTER	UNIT	STATUS	FIF
01.	MSF (0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
02.	DIS (0)	02 00 00 00	18 4F E4 00
03.	(T.C. IGNORE DIS)		
04.	MSF (0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
05.	DIS (0)	02 00 00 00	18 4F E4 00
06.	DTC (1)	00 00 02 10	00 0F 46
07.	DCS (0)	00 00 02 01	00 06 94 00
08.	(NO CORRECT CARRIER IN 10 SECONDS)		
09.	FTT (1)	00 00 04 04	00 0E 94 00
0A.	DCS (0)	00 00 08 01	
0B.	(NO CORRECT CARRIER IN 10 SECONDS)		
0C.	FTT (1)	00 00 04 04	00 0A 94 00
0D.	DCS (0)	00 00 08 01	
0E.	(NO CORRECT CARRIER IN 10 SECONDS)		
0F.	FTT (1)	00 00 04 04	00 02 94 00
10.	DCS (0)	00 00 08 01	00 02 94 00
11.	(TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001610)		
12.	(T.C. NO BIT 5 IN CFR CONTROL BYTE)		
13.	CFR (1)	00 00 04 04	00 02 94 00
14.	DCS (0)	00 00 08 01	00 02 94 00
15.	(TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001622)		
16.	CFR (1)	00 00 04 04	
17.	(FAX RECEIVED)		
18.	EDM (0)	00 00 08 02	
19.	(T.C. IGNORE MFS-EDM-EOP, SEND CRP)		
1A.	CRF (1)	00 00 08 02	
1B.	EDM (0)	00 00 08 02	
1C.	MSF (1)	00 00 20 00	
1D.	(12 TIMEOUT)		
1E.	DIS (1)	00 00 02 01	00 0F 46
1F.	MSC (1)	00 00 02 01	CB 80 C8 00 00 1B 00 00 00 00
20.	DTC (1)	00 00 02 01	10 4E E4 00
21.	DCM (0)	00 00 80 00	
22.	(END TEST)		

CP0E

DE DATA SIGNALING RATE: 2400 BPS
9600 BPS

>CP11

11 TCF/FAXIN RESPONSE: CFR/MCF
CFR/RTF
FTT/RTN THEN CFR/MCF

>RU

TEST RUNNING

8 JULY 1982

BURROUGHS BEX 5100 (HALF DUPLEX CONFIGURATION)

TEST#	TESTER	UNIT	STATUS	FIF
01	OPERATING METHOD:	4R 1 AUTO-AUTO		
02	CALLING UNIT:	TESTER		
03	DOCUMENT EXCHANGE:	NO		
04	PAGES / DOCUMENT:	1		
05	DOCUMENT ORIGINATOR:	UNIT		
06	ERRORS1:	29		
07	ERRORS2:	00		
08	ERRORS3:	00		
09	COMPRESSION CODE:	HUFFMAN		
10	MIN SCAN LINE TIME:	10/5 MS		
11	VERT RESOLUTION:	3.85 LI/MM		
12	MAX PAPER WIDTH:	297 MM (2432 PELS)		
13	MAX PAPER LENGTH:	364 MM		
14	DATA SIGNALING RATE:	4800 BPS		
15	PREAMBLE DURATION:	0.86 SEC		
16	TX TEST DOCUMENT:	01		
17	TCF/FAXIN RESPONSE:	FIT/RIN THEN CFR/MCF		
18	TX BIT RATE FALLBACK:	ENABLED		
19	OPTIONAL FRAMES:	NONE		
20	EXTENDED FIF:	NO (3 BYTES)		
21	AUTO TEST ERRORS:	ENABLED		

TEST#	TESTER	UNIT	STATUS	FIF
01.	MSF	(0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
02.	DIS	(0)	02 00 00 00	18 4F E4 00
03.	(T.C. IGNORE DIS)			
04.	MSF	(0)	02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
05.	DIS	(0)	02 00 00 00	18 4F E4 00
06.	DTIC	(1)	00 00 02 10	00 0F 66
07.	DCS	(0)	00 00 02 01	00 0A 94 00
08.	(TCF RCVD, NOT ALL ZEROS. DURATION (MS)=001804)			
09.	FTT	(1)	00 00 04 04	
10.	DCS	(0)	00 00 08 01	00 0E 94 00
11.	(BIT RATE FALLBACK TO 7200)			
12.	(TCF RCVD, NOT ALL ZEROS. DURATION (MS)=001588)			
13.	(T.C. NO BIT 5 IN CFR CONTROL BYTE)			
14.	CFR	(1)	00 00 04 04	
15.	DCS	(0)	00 00 08 01	00 0E 94 00
16.	(TCF RCVD, NOT ALL ZEROS. DURATION (MS)=001700)			
17.	CFR	(1)	00 00 04 04	
18.	(FAX RECEIVED)			
19.	EDM	(0)	00 00 08 02	
20.	(T.C. IGNORE MPS-EDM EOF, SEND CFR)			
21.	CRF	(1)	00 00 08 02	
22.	EDM	(0)	00 00 09 07	
23.	RIN	(1)	00 00 20 00	
24.	(12 TIMEOUT)			
25.	RIS	(1)	00 00 02 01	00 0F 76
26.	MSC	(1)	00 00 02 01	CB 80 C8 00 00 1B 00 00 00 00
27.	DIC	(1)	00 00 02 01	10 4E E4 00
28.	RCN	(0)	00 00 80 00	
29.	(END TEST)			

CF0E

OE DATA SIGNALING RATE: 4800 BPS
7200 BPS

CP11

11 TCF/FAXIN RESPONSE: FTT/RTN THEN CFR/NCF
ALWAYS FTT/RTN

>RU

TEST RUNNING

8 JULY 1982

BURKHOUGH'S DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST1
 01 OPERATING METHOD: 04
 02 CALLING UNIT: 4R 1 AUTO-AUTO
 03 DOCUMENT EXCHANGE: TESTER
 04 PAGES / DOCUMENT: NO
 05 DOCUMENT ORIGINATOR: 1
 06 ERRORS: UUT
 07 ERRORS2: 29
 08 ERRORS3: 00
 09 COMPRESSION CODE: HUFFMAN
 0A MIN SCAN LINE TIME: 10/5 MS
 0B VERT RESOLUTION: 3.85 LI/MM
 0C MAX PAPER WIDTH: 297 MM (2432 PELS)
 0E DATA SIGNALING RATE: 364 MM
 0F PREAMBLE DURATION: 0.86 SEC
 10 1X TEST DOCUMENT: 01
 11 ICF/FAXIN RESPONSE: ALWAYS FIT/RTM
 12 1X BIT RATE FALLBACK: ENABLED
 13 OPTIONAL FRAMES: NONE
 14 EXTENDED FIT: NO (3 BYTES)
 15 AUTO TEST ERRORS: ENABLED

TESTER	UUT	STATUS	FIF
01.	NSF	(0) 02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
02.	DIS	(0) 02 00 00 00	18 4F E4 00
03. (I.C. IGNORE DIS)	NSF	(0) 02 00 00 00	CB 80 C0 00 00 17 00 00 00 00
04.	DIS	(0) 02 00 00 00	18 4F E4 00
05.	DIS	(0) 02 00 00 00	00 0F 46
06.	DIC (1)	00 00 02 10	00 06 94 00
07.	DCS	(0) 00 00 02 01	DURATION (MS)=001734
08. (ICF RCVD, NOT ALL ZEROS, DURATION (MS)=001734)	DCS	(0) 00 00 04 04	00 0E 94 00
09. FIT (1)	DCS	(0) 00 00 08 01	DURATION (MS)=001588
0A.	DCS	(0) 00 00 04 04	00 0A 94 00
0B. (ICF RCVD, NOT ALL ZEROS, DURATION (MS)=001588)	DCS	(0) 00 00 08 01	DURATION (MS)=000606
0C. FIT (1)	DCS	(0) 00 00 04 04	00 02 94 00
0D.	DCS	(0) 00 00 08 01	DURATION (MS)=001628
0E. (BIT RATE FALLBACK TO 4800)	DCS	(0) 00 00 04 04	00 00 04 04
0F. (ICF RCVD, NOT ALL ZEROS, DURATION (MS)=000606)	DCS	(0) 00 00 08 01	00 02 94 00
10. FIT (1)	DCS	(0) 00 00 04 04	DURATION (MS)=001628
11.	DCS	(0) 00 00 08 01	00 00 04 04
12. (BIT RATE FALLBACK TO 2400)	DCS	(0) 00 00 04 04	00 00 04 04
13. (ICF RCVD, NOT ALL ZEROS, DURATION (MS)=001628)	DCS	(0) 00 00 08 01	00 00 04 04
14. FIT (1)	DCS	(0) 00 00 04 04	00 00 04 04
15.	DCS	(0) 00 00 08 01	00 00 04 04
16. (END TEST)	DCS	(0) 00 00 04 04	00 00 04 04

8 JULY 1982

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

```

TEST:
01 OPERATING METHOD: 04
02 CALLING UNIT: 4R 1 AUTO-AUTO
03 DOCUMENT EXCHANGE: TESTER
04 PAGES / DOCUMENT: NO
05 DOCUMENT ORIGINATOR: 1
06 DOCUMENT ORIGINATOR: UUT
07 ERRORS: 29
08 ERRORS: 00
09 COMPRESSION CODE: HUFFMAN
0A MIN SCAN LINE TIME: 0 MS
0B VERT RESOLUTION: 3.85 LI/MM
0C MAX PAPER WIDTH: 297 MM (2432 FELB)
0D MAX PAPER LENGTH: 364 MM
0E DATA SIGNALING RATE: 9600 BPS
0F PREAMBLE DURATION: 0.86 SEC
10 TX TEST DOCUMENT: 01
11 ICF/FAXIN RESPONSE: CFR/MCF
12 TX BIT RATE FALLBACK: ENABLED
13 OPTIONAL FRAMES: NONE
14 EXTENDED FIF: NO (3 BYTES)
15 AUTO TEST ERRORS: DISABLED
  
```

A-26

TESTER	UUT	STATUS	FIF
01.	MSF (0)	02 00 00 00	C8 80 C0 00 17 00 00 00
02.	DIS (0)	02 00 00 00	18 4F E4 00
03.	DTC (1)	00 00 02 10	00 0F 76
04.	DCS (0)	00 00 02 01	00 06 F4 00
05.	(TCF RUVD, NOT ALL ZEROS, DURATION (MS)=001804)	00 00 04 04	
06.	CFR (1)	00 00 08 02	
07.	(FAX RECEIVED)	00 00 20 00	
08.	MCF (1)	00 00 02 01	00 0F 76
09.	(12 TIMEOUT)	00 00 02 01	C8 80 C8 00 1R 00 00 00
0A.	DIS (1)	00 00 02 01	10 4E E4 00
0B.	DTC (1)	00 00 02 01	
0C.	DCM (0)	00 00 80 00	
0D.	(END TEST)		

>LL

(MINIMUM CODED LINE LENGTH (BITS) = 000032)

(ERROR LINES/TOTAL LINES = 000007 /000556)

8 JULY 1982

BURROUGHS BEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:	TESTER	UNIT	STATUS	FIF
01 OPERATING METHOD:	04	4R 1 AUTO-AUTO		
02 CALLING UNIT:	TESTER			
03 DOCUMENT EXCHANGE:	NO			
04 PAGES / DOCUMENT:	1			
05 DOCUMENT ORIGINATOR:	UNIT			
06 ERROR:	29			
07 ERROR:	00			
08 ERROR:	00			
09 COMPRESSION CODE:	HUFFMAN			
0A MIN SCAN LINE TIME:	40 MS			
0B VERT RESOLUTION:	3.85 LI/MM			
0C MAX PAPER WIDTH:	297 MM (2432 PELS)			
0D MAX PAPER LENGTH:	364 MM			
0E DATA SIGNALING RATE:	9600 BPS			
0F PREAMBLE DURATION:	0.86 SEC			
10 TX TEST DOCUMENT:	01			
11 TCF/FAXIN RESPONSE:	CFR/MCF			
12 TX BIT RATE FALLBACK:	ENABLED			
13 OPTIONAL FRAMES:	NONE			
14 EXTENDED FIF:	NO (3 BYTES)			
15 AUTO TEST ERROR:	DISABLED			

TESTER	UNIT	STATUS	FIF
01.	NSF (0)	02 00 00 00	C8 80 C0 00 17 00 00 00 00
02.	DIS (0)	02 00 00 00	18 4F E4 00
03.	DTC (1)	00 00 02 10	00 0F 46
04.	DCS (0)	00 00 02 01	00 06 C4 00
05.	(TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001772)	00 00 04 04	
06.	CFR (1)		
07.	(FAX RECEIVED)		
08.	EOM (0)	00 00 08 02	
09.	MCF (1)	00 00 20 00	
0A.	(T2 TIMEOUT)		
0B.	DIS (1)	00 00 02 01	00 0F 46
0C.	NSC (1)	00 00 02 01	C8 80 C8 00 18 00 00 00 00
0D.	DTC (1)	00 00 02 01	10 4E E4 00
0E.	DCM (0)	00 00 80 00	
0F.	(END TEST)		

LL

(MINIMUM CODED LINE LENGTH (BITS) = 000172)

(ERROR LINES/TOTAL LINES = 000002 / 000323)

CP14

14 EXTENDED FIF: NO (3 BYTES)
YES (4 BYTES)

>CP13

13 OPTIONAL FRAMES: NONE
NSF WITH FIRST DIS

>CPOA

0A MIN SCAN LINE TIME: 40 MS
10/5 MS
20/10 MS
40/20 MS
0 MS
5 MS
10 MS
20 MS
40 MS
10/5 MS

A-28

>ST05

TEST:
01 OPERATING METHOD: 4R 1 AUTO-AUTO
02 CALLING UNIT: WUT
03 DOCUMENT EXCHANGE: NO
04 PAGES / DOCUMENT: 2
05 DOCUMENT ORIGINATOR: TESTER
06 ERRORS: 00
07 ERRORS: 00
08 ERRORS: 00
09 COMPRESSION CODE: INFTMAN
0A MIN SCAN LINE TIME: 10/5 MS
0B VERT RESOLUTION: 3.85 LI/MM
0C MAX PAPER WIDTH: 297 MM (2432 PELS)
0D MAX PAPER LENGTH: 364 MM
0E DATA SIGNALING RATE: 5600 BPS
0F PREAMBLE DURATION: 0.96 SEC
10 TX TEST DOCUMENT: 01
11 TCF/FAXIN RESPONSE: CTR/NOT
12 TX BIT RATE FAILURE: ENABLED
13 OPTIONAL FRAMES: NSF WITH FIRST DIS
14 EXTENDED FIF: YES (4 BYTES)
15 AUTO TEST ERRORS: DISABLED

8 JULY 1982

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:
 01 OPERATING METHOD: 4R 1 AUTO-AUTO
 02 CALLING UNIT: UUT
 03 DOCUMENT EXCHANGE: NO
 04 PAGES / DOCUMENT: 2
 05 DOCUMENT ORIGINATOR: TESTER
 06 ERROR: 00
 07 ERROR: 00
 08 ERROR: 00
 09 COMPRESSION CODE: HUFFMAN
 10 MIN SCAN LINE TIME: 10/5 MS
 11 VERT RESOLUTION: 3.85 LI/MM
 12 MAX PAPER WIDTH: 297 MM (2432 PELS)
 13 MAX PAPER LENGTH: 364 MM
 14 DATA SIGNALING RATE: 7200 WPS
 15 PREAMBLE DURATION: 1.14 SEC
 16 TX TEST DOCUMENT: 02
 17 TCF/FAXIN RESPONSE: CFR/MCF
 18 TX BIT RATE FALLBACK: ENABLED
 19 OPTIONAL FRAMES: NONE
 20 EXTENDED FIF: YES (4 BYTES)
 21 AUTO TEST ERRORS: ENABLED

TESTER	UUT	STATUS	FIF
01. DIB (1)		00 00 02 01	00 0F E6 00
02. (T4 TIMEOUT)			
03. DIB (1)		00 00 02 00	00 0F E6 00
04. NSF (0)		00 00 02 01	C8 80 C8 00 00 18 00 00 00 00
05. DIB (0)		00 00 02 01	18 4F E4 00
06. DCS (0)		04 00 00 00	00 07 A6 00
07. (TCF TRANSMITTED)			
08. (T4 TIMEOUT)			
09. DCS (0)		04 00 00 00	00 07 A6 00
10. (TCF TRANSMITTED)			
11. DCS (0)		04 00 00 00	00 07 A6 00
12. (TCF TRANSMITTED)			
13. (BIT RATE FALLBACK TO 7200)		04 02 00 00	00 0F A6 00
14. DCS (0)		04 00 00 00	
15. (T4 TIMEOUT)			
16. MFS (0)		10 04 00 00	
17. RIF (0)		10 04 00 00	
18. DCS (0)		04 00 00 00	00 0F A6 00
19. (TCF TRANSMITTED)			
20. (FAX TRANSMITTED)		04 02 00 00	
21. EDF (0)		10 02 00 00	
22. (T4 TIMEOUT)			

LH

TESTER	UNIT	STATUS	FIF
01. BIS (1)		00 00 02 01	00 0F E6 00
02. (T4 TIMEOUT)			
03. BIS (1)		00 00 02 00	00 0F E6 00
04. MSF (0)		00 00 02 01	C8 80 C8 00 00 1B 00 00 00 00
05. BIS (0)		00 00 02 01	1B 4F E4 00
06. DCS (0)		04 00 00 00	00 07 A6 00
07. (TCF TRANSMITTED)			
08. (T4 TIMEOUT)			
09. DCS (0)		04 00 00 00	00 07 A6 00
0A. (TCF TRANSMITTED)			
0B. (T4 TIMEOUT)			
0C. DCS (0)		04 00 00 00	00 07 A6 00
0D. (TCF TRANSMITTED)			
0E. FIT (0)		04 02 00 00	
0F. (BIT RATE FALLBACK TO 7200)			
10. DCS (0)		04 00 00 00	00 0F A6 00
11. (TCF TRANSMITTED)			
12. CFR (0)		04 02 00 00	
13. (FAX TRANSMITTED)			
14. MPS (0)		10 04 00 00	
15. (T4 TIMEOUT)			
16. MPS (0)		10 04 00 00	
17. RTP (0)		10 04 00 00	
18. DCS (0)		04 00 00 00	00 0F A6 00
19. (TCF TRANSMITTED)			
1A. CFR (0)		04 02 00 00	
1B. (FAX TRANSMITTED)			
1C. EOP (0)		10 02 00 00	
1D. (T4 TIMEOUT)			
1E. EOP (0)		10 02 00 00	
1F. MCF (0)		10 02 00 00	
20. DCN (0)		80 00 00 00	
21. (END TEST)			

CPOF

OF PREAMBLE DURATION: 0.86 SEC
1.14 SEC

>CP15

15 AUTO TEST ERRORS: DISABLED
ENABLED

>ST06

TEST:
04 1 AUTO-AUTO
01 OPERATING METHOD: TESTER
02 CALLING UNIT: NO
03 DOCUMENT EXCHANGE: 2
04 PAGES / DOCUMENT: TESTER
05 DOCUMENT ORIGINATOR: 80
06 ERRORS1: 00
07 ERRORS2: 00
08 ERRORS3: HUFFMAN
09 COMPRESSION CODE: 10/5 MS
0A MIN SCAN LINE TIME: 3.85 LI/MM
0B VERT RESOLUTION: 297 MM (2432 PELS)
0C MAX PAPER WIDTH: 364 MM
0D MAX PAPER LENGTH: 9600 BPS
0E DATA SIGNALING RATE: 1.14 SEC
0F PREAMBLE DURATION: 01
10 TX TEST DOCUMENT: CFR/MCF
11 TCF/FAXIN RESPONSE: ENABLED
12 TX BIT RATE FALLBACK: NSF WITH FIRST BIS
13 OPTIONAL FRAMES: YES (4 BYTES)
14 EXTENDED FFI: ENABLED
15 AUTO TEST ERRORS:

>CP10

10 TX TEST DOCUMENT: 01
02

>KU

TEST RUNNING

9 JULY 1982

START TIMEOUT MEASUREMENT

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST1
 01 OPERATING METHOD: 06
 02 CALLING UNIT: 41 AUTO-AUTO
 03 DOCUMENT EXCHANGE: TESTER
 04 PAGES / DOCUMENT: NO
 05 DOCUMENT ORIGINATOR: 2
 06 ERRORS: 80
 07 ERRORS: 00
 08 ERRORS: 00
 09 COMPRESSION CODE: HUFFMAN
 0A MIN SCAN LINE TIME: 10/5 MS
 0B VERT RESOLUTION: 3.85 LI/MM
 0C MAX PAPER WIDTH: 297 MM (2432 PELS)
 0D MAX PAPER LENGTH: 364 MM
 0E DATA SIGNALING RATE: 9600 BPS
 0F PREAMBLE DURATION: 1.14 SEC
 10 TX TEST DOCUMENT: 02
 11 TCF/FAXIN RESPONSE: CFR/MCF
 12 TX BIT RATE FALLBACK: ENABLED
 13 OPTIONAL FRAMES: NSF WITH FIRST DIS
 14 EXTENDED FIF: YES (4 BYTES)
 15 AUTO TEST ERRORS: ENABLED

A-32

TESTER	UNIT	STATUS	FIF
01.	NSF (0)	02 00 00 00	C8 80 C0 00 00 17 00 00 00 00
02.	DIS (0)	02 00 00 00	18 4F E4 00
03.	DCS (1)	04 00 00 00	00 07 A6 00
04.	(TCF TRANSMITTED) CFR	04 02 00 00	
05.	(FAX TRANSMITTED)		
06.	(FAX TRANSMITTED)	10 04 00 00	
07.	MFS (1)		
08.	(T4 TIMEOUT)	10 04 00 00	
09.	MFS (1)	10 04 00 00	
0A.	RTF (0)	04 00 00 00	00 07 A6 00
0B.	DCS (1)		
0C.	(TCF TRANSMITTED) CFR	04 02 00 00	
0D.	(FAX TRANSMITTED)		
0E.	(FAX TRANSMITTED)		
0F.	(I.C. EDM NOT SENT. MEASURE T2)		
10.	(TIMEOUT (MS) = 013984)		
11.	(END TEST)		

CP15
15 AUTO TEST ERRORS!
ENABLED
DISABLED

>RU
TEST RUNNING
>

8 JULY 1982

(HALF DUPLEX CONFIGURATION)

BURROUGHS BEX 5100

TESTER	UUT	STATUS	FIF
01. OPERATING METHOD:	NSF (0)	02 00 00 00	C8 80 C0 00 00 17 00 00 00 00
02. CALLING UNIT:	DIB (0)	02 00 00 00	18 4F E4 00
03. DOCUMENT EXCHANGE:	DCS (1)	04 00 00 00	00 07 A6 00
04. PAGES / DOCUMENT:	(TCF TRANSMITTED)	(0)	
05. DOCUMENT ORIGINATOR:	CFR	04 02 00 00	
06. ERRORS1:	(FAX TRANSMITTED)		
07. ERRORS2:	MFS (1)	10 04 00 00	
08. ERRORS3:	(14 TIMEOUT)	10 04 00 00	
09. COMPRESSION CODE:	MFS (1)	10 04 00 00	
10. MIN SCAN LINE TIME:	RTP (0)	04 00 00 00	00 07 A6 00
11. VERT RESOLUTION:	DCS (1)	04 02 00 00	
12. MAX PAPER WIDTH:	(TCF TRANSMITTED)		
13. MAX PAPER LENGTH:	CFR	10 02 00 00	
14. DATA SIGNALING RATE:	(FAX TRANSMITTED)		
15. PREAMBLE DURATION:	EDF (1)	10 02 00 00	
16. TX TEST DOCUMENT:	(14 TIMEOUT)	10 02 00 00	
17. TX BIT RATE FALLBACK:	EDF (1)	10 02 00 00	
18. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
19. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
20. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
21. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
22. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
23. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
24. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
25. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
26. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
27. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
28. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
29. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
30. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
31. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
32. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
33. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
34. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
35. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
36. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
37. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
38. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
39. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
40. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
41. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
42. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
43. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
44. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
45. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
46. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
47. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
48. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
49. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
50. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
51. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
52. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
53. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
54. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
55. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
56. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
57. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
58. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
59. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
60. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
61. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
62. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
63. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
64. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
65. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
66. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
67. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
68. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
69. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
70. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
71. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
72. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
73. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
74. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
75. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
76. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
77. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
78. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
79. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
80. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
81. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
82. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
83. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
84. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
85. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
86. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
87. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
88. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
89. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
90. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
91. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
92. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
93. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
94. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
95. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
96. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
97. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
98. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	
99. TX BIT RATE FALLBACK:	DCF (1)	10 02 00 00	
100. TCF/FAXIN RESPONSE:	DCF (1)	10 02 00 00	

8107

01 OPERATING METHOD:	07	AUTO-AUTO
02 CALLING UNIT:	UNIT	
03 DOCUMENT EXCHANGE:	NO	
04 PAGES / DOCUMENT:	2	
05 DOCUMENT ORIGINATOR:	UNIT	
06 ERRORS1:	22	
07 ERRORS2:	00	
08 ERRORS3:	00	
09 COMPRESSION CODE:	HUFFMAN	
0A MIN SCAN LINE TIME:	10/5 MS	
0B VERT RESOLUTION:	3.85 LI/MM	
0C MAX PAPER WIDTH:	297 MM (2432 PELS)	
0D MAX PAPER LENGTH:	364 MM	
0E DATA SIGNALING RATE:	9600 BPS	
0F PREAMBLE DURATION:	1.14 SEC	
10 TX TEST DOCUMENT:	02	
11 TCF/FAXIN RESPONSE:	CFR/MCF	
12 TX BIT RATE FALLBACK:	ENABLED	
13 OPTIONAL FRAMES:	NSF WITH FIRST DIS	
14 EXTENDED FIF:	YES (4 BYTES)	
15 AUTO TEST ERRORS:	DISABLED	

RU

TEST RUNNING

8 JULY 1982

BURROUGHS BEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:
07
AT 1 AUTO-AUTO
UNIT

01 OPERATING METHOD:
02 CALLING UNIT:
03 DOCUMENT EXCHANGE:
04 PAGES / DOCUMENT:
05 DOCUMENT ORIGINATOR:
06 ERROR1:
07 ERROR2:
08 ERROR3:
09 COMPRESSION CODE:
10 MIN SCAN LINE TIME:
11 VERT RESOLUTION:
12 MAX PAPER WIDTH:
13 MAX PAPER LENGTH:
14 DATA SIGNALING RATE:
15 PREAMBLE DURATION:
16 TX TEST DOCUMENT:
17 TCF/FAXIN RESPONSE:
18 TX BIT RATE FALLBACK:
19 OPTIONAL FRAMES:
20 EXTENDED FIF:
21 AUTO TEST ERRORS:

01. MSF (1)
02. DIS (1)
03. (T4 TIMEOUT)
04. MSF (1)
05. DIS (1)
06. (T4 TIMEOUT)
07. MSF (1)
08. DIS (1)
09. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001634)
10. CFR (0)
11. (FAX RECEIVED)
12. MCF (0)
13. (T2 TIMEOUT)
14. DIS (1)
15. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001642)
16. CFR (0)
17. (FAX RECEIVED)
18. MCF (0)
19. (END TEST)

TESTER	UNIT	STATUS	FIF
01. MSF (1)		00 00 02 01	12 34 5A BC DE
02. DIS (1)		00 00 02 01	00 0F E6 00
03. (T4 TIMEOUT)			
04. MSF (1)		00 00 02 00	12 34 5A BC DE
05. DIS (1)		00 00 02 00	00 0F E6 00
06. (T4 TIMEOUT)			
07. MSF (1)		00 00 02 00	12 34 5A BC DE
08. DIS (1)		00 00 02 00	00 0F E6 00
09. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001634)		00 00 02 01	00 06 9A 00
10. CFR (0)		00 00 04 04	
11. (FAX RECEIVED)			
12. MCF (0)		00 00 08 02	
13. (T2 TIMEOUT)		00 00 20 00	
14. DIS (1)		00 00 02 01	00 0F E6 00
15. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001642)		00 00 02 01	00 06 9A 00
16. CFR (0)		00 00 04 04	
17. (FAX RECEIVED)			
18. MCF (0)		00 00 08 02	
19. (END TEST)		00 00 20 00	

CP15

15 AUTO TEST ERRORS

DISABLED

ENABLED

>RU

TEST RUNNING

>

8 JULY 1982

BURROUGHS BEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:
 01 OPERATING METHOD: 41 AUTO-AUTO
 02 CALLING UNIT: UUT
 03 DOCUMENT EXCHANGE: NO
 04 PAGES / DOCUMENT: 2
 05 DOCUMENT ORIGINATOR: UUT
 06 ERROR: 22
 07 ERROR: 00
 08 ERROR: 00
 09 COMPRESSION CODE: HUFFMAN
 10 MIN SCAN LINE TIME: 10/5 MS
 11 VERT RESOLUTION: 3.85 LI/MM
 12 MAX PAPER WIDTH: 297 MM (2432 PELS)
 13 MAX PAPER LENGTH: 344 MM
 14 DATA SIGNALING RATE: 9600 BPS
 15 PREAMBLE DURATION: 1.14 SEC
 16 TX TEST DOCUMENT: 02
 17 TCF/FAKIN RESPONSE: CFR/MCF
 18 TX BIT RATE FALLBACK: ENABLED
 19 OPTIONAL FRAMES: NSF WITH FIRST DIS
 20 EXTENDED FIF: YES (4 BYTES)
 21 AUTO TEST ERRORS: ENABLED

A-38

TESTER	UUT	STATUS	FIF
01. NSF (1)		00 00 02 01	12 34 5A BC DE
02. DIS (1)		00 00 02 01	00 0F E6 00
03. (14 TIMEOUT)			
04. NSF (1)		00 00 02 00	12 34 5A BC DE
05. DIS (1)		00 00 02 00	00 0F E6 00
06. (14 TIMEOUT)			
07. NSF (1)		00 00 02 00	12 34 5A BC DE
08. DIS (1)		00 00 02 00	00 0F E6 00
09. (14 TIMEOUT)			
10. NSF (1)		00 00 02 00	12 34 5A BC DE
11. DIS (1)		00 00 02 00	00 0F E6 00
12. (14 TIMEOUT)			
13. NSF (1)		00 00 02 01	00 0F E6 00
14. DIS (1)		00 00 02 01	00 0F E6 00
15. (14 TIMEOUT)			
16. NSF (1)		00 00 02 01	00 0F E6 00
17. DIS (1)		00 00 02 01	00 0F E6 00
18. (14 TIMEOUT)			
19. NSF (1)		00 00 02 01	00 0F E6 00
20. DIS (1)		00 00 02 01	00 0F E6 00
21. (14 TIMEOUT)			
22. NSF (1)		00 00 02 01	00 0F E6 00
23. DIS (1)		00 00 02 01	00 0F E6 00
24. (14 TIMEOUT)			
25. NSF (1)		00 00 02 01	00 0F E6 00
26. DIS (1)		00 00 02 01	00 0F E6 00
27. (14 TIMEOUT)			
28. NSF (1)		00 00 02 01	00 0F E6 00
29. DIS (1)		00 00 02 01	00 0F E6 00
30. (14 TIMEOUT)			
31. NSF (1)		00 00 02 01	00 0F E6 00
32. DIS (1)		00 00 02 01	00 0F E6 00
33. (14 TIMEOUT)			
34. NSF (1)		00 00 02 01	00 0F E6 00
35. DIS (1)		00 00 02 01	00 0F E6 00
36. (14 TIMEOUT)			
37. NSF (1)		00 00 02 01	00 0F E6 00
38. DIS (1)		00 00 02 01	00 0F E6 00
39. (14 TIMEOUT)			
40. NSF (1)		00 00 02 01	00 0F E6 00
41. DIS (1)		00 00 02 01	00 0F E6 00
42. (14 TIMEOUT)			
43. NSF (1)		00 00 02 01	00 0F E6 00
44. DIS (1)		00 00 02 01	00 0F E6 00
45. (14 TIMEOUT)			
46. NSF (1)		00 00 02 01	00 0F E6 00
47. DIS (1)		00 00 02 01	00 0F E6 00
48. (14 TIMEOUT)			
49. NSF (1)		00 00 02 01	00 0F E6 00
50. DIS (1)		00 00 02 01	00 0F E6 00
51. (14 TIMEOUT)			
52. NSF (1)		00 00 02 01	00 0F E6 00
53. DIS (1)		00 00 02 01	00 0F E6 00
54. (14 TIMEOUT)			
55. NSF (1)		00 00 02 01	00 0F E6 00
56. DIS (1)		00 00 02 01	00 0F E6 00
57. (14 TIMEOUT)			
58. NSF (1)		00 00 02 01	00 0F E6 00
59. DIS (1)		00 00 02 01	00 0F E6 00
60. (14 TIMEOUT)			
61. NSF (1)		00 00 02 01	00 0F E6 00
62. DIS (1)		00 00 02 01	00 0F E6 00
63. (14 TIMEOUT)			
64. NSF (1)		00 00 02 01	00 0F E6 00
65. DIS (1)		00 00 02 01	00 0F E6 00
66. (14 TIMEOUT)			
67. NSF (1)		00 00 02 01	00 0F E6 00
68. DIS (1)		00 00 02 01	00 0F E6 00
69. (14 TIMEOUT)			
70. NSF (1)		00 00 02 01	00 0F E6 00
71. DIS (1)		00 00 02 01	00 0F E6 00
72. (14 TIMEOUT)			
73. NSF (1)		00 00 02 01	00 0F E6 00
74. DIS (1)		00 00 02 01	00 0F E6 00
75. (14 TIMEOUT)			
76. NSF (1)		00 00 02 01	00 0F E6 00
77. DIS (1)		00 00 02 01	00 0F E6 00
78. (14 TIMEOUT)			
79. NSF (1)		00 00 02 01	00 0F E6 00
80. DIS (1)		00 00 02 01	00 0F E6 00
81. (14 TIMEOUT)			
82. NSF (1)		00 00 02 01	00 0F E6 00
83. DIS (1)		00 00 02 01	00 0F E6 00
84. (14 TIMEOUT)			
85. NSF (1)		00 00 02 01	00 0F E6 00
86. DIS (1)		00 00 02 01	00 0F E6 00
87. (14 TIMEOUT)			
88. NSF (1)		00 00 02 01	00 0F E6 00
89. DIS (1)		00 00 02 01	00 0F E6 00
90. (14 TIMEOUT)			
91. NSF (1)		00 00 02 01	00 0F E6 00
92. DIS (1)		00 00 02 01	00 0F E6 00
93. (14 TIMEOUT)			
94. NSF (1)		00 00 02 01	00 0F E6 00
95. DIS (1)		00 00 02 01	00 0F E6 00
96. (14 TIMEOUT)			
97. NSF (1)		00 00 02 01	00 0F E6 00
98. DIS (1)		00 00 02 01	00 0F E6 00
99. (14 TIMEOUT)			
100. NSF (1)		00 00 02 01	00 0F E6 00

LH

TESTER	WUT	STATUS	FIF
01. MSF (1)		00 00 02 01	12 34 5A BC DE
02. DIS (1)		00 00 02 01	00 0F E6 00
03. (T4 TIMEOUT)			
04. MSF (1)		00 00 02 00	12 34 5A BC DE
05. DIS (1)		00 00 02 00	00 0F E6 00
06. (T4 TIMEOUT)			
07. MSF (1)		00 00 02 00	12 34 5A BC DE
08. DIS (1)		00 00 02 00	00 0F E6 00
09. (T4 TIMEOUT)			
0A. MSF (1)		00 00 02 00	12 34 5A BC DE
0B. DIS (1)		00 00 02 00	00 0F E6 00
0C. DCS (1)		00 00 02 01	00 0A 94 00
0D. (TCF RCVD, NOT ALL ZEROS. DURATION (MS)=001636)			
0E. (T.C. NO BIT 5 IN CFR CONTROL BYTE)			
0F. CFR (0)		00 00 04 04	
10. DCS (1)		00 00 08 01	00 06 94 00
11. (TCF RCVD, NOT ALL ZEROS. DURATION (MS)=001636)			
12. CFR (0)		00 00 04 04	
13. (FAX RECEIVED)			
14. EOM (1)		00 00 08 02	
15. (T.C. IGNORE MPS-EOM-EOP)			
16. EOM (1)		00 00 08 02	
17. MCF (0)		00 00 20 00	
18. (T2 TIMEOUT)			
19. DIS (1)		00 00 02 01	00 0F E6 00
1A. DCS (1)		00 00 02 01	00 0A 94 00
1B. (TCF RCVD, NOT ALL ZEROS. DURATION (MS)=001642)			
1C. CFR (0)		00 00 04 04	
1D. (FAX RECEIVED)			
1E. EOP (1)		00 00 08 02	
1F. MCF (0)		00 00 20 00	
20. DCN (1)		00 00 08 04	
21. (END TEST)			

8108

TEST!
01 OPERATING METHOD!
02 CALLING UNIT!
03 DOCUMENT EXCHANGE!
04 PAGES / DOCUMENT!
05 DOCUMENT ORIGINATOR!
06 ERROR81!
07 ERROR82!
08 ERROR83!
09 COMPRESSION CODE!
0A MIN SCAN LINE TIME!
0B VER. RESOLUTION!
0C MAX PAPER WIDTH!
0D MAX PAPER LENGTH!
0E DATA SIGNALING RATE!
0F PREAMBLE DURATION!
10 TX TEST DOCUMENT!
11 TCF/FAXIN RESPONSE!
12 TX BIT RATE FALLBACK!
13 OPTIONAL FRAMES!
14 EXTENDED FIF!
15 AUTO TEST ERRORS!

08
47 1 AUTO-AUTO
TESTER
YES
2
TESTER
00
00
00
HUFFMAN
10/5 MB
3.85 LJ/MM
297 MM (2432 PELS)
344 MM
9600 BPS
1.14 SEC
02
CFR/MCF
ENABLED
NSF WITH FIRST DIS
YES (4 BYTES)
ENABLED

>CP13

13 OPTIONAL FRAMES!

NSF WITH FIRST DIS

CIS/CIS WITH FIRST DIS/DIC

NSF.CSI.C10

>RU

TEST RUNNING

8 JULY 1982

BURROUGHS DEX S100 (HALF DUPLEX CONFIGURATION)

TEST:
 01 OPERATING METHOD: 08
 02 CALLING UNIT: 41 AUTO-AUTO
 03 DOCUMENT EXCHANGE: TESTER
 04 PAGES / DOCUMENT: 2 YES
 05 DOCUMENT ORIGINATOR: TESTER
 06 ERRORS: 00
 07 ERRORS: 00
 08 ERRORS: 00
 09 COMPRESSION CODE: HUFFMAN
 0A MIN SCAN LINE TIME: 10/5 MS
 0B VERT RESOLUTION: 3.85 LI/MM
 0C MAX PAPER WIDTH: 297 MM (2432 PELS)
 0D MAX PAPER LENGTH: 364 MM
 0E DATA SIGNALING RATE: 9600 BPS
 0F PREAMBLE DURATION: 1.14 SEC
 10 TX TEST DOCUMENT: 02
 11 TCF/FAXIN RESPONSE: CFR/MCF
 12 TX BIT RATE FALLBACK: ENABLED
 13 OPTIONAL FRAMES: NSF-CBI-CIG
 14 EXTENDED FIF: YES (4 BYTES)
 15 AUTO TEST ERRORS: ENABLED

TESTER	UNIT	STATUS	FIF
01.	NSF	(0)	02 00 00 00
02.	DIS	(0)	02 00 00 00
03. CIB	(1)		18 4F E4 00
04. DCS	(1)		31 32 33 34 35 36 37 38 39 30 30 39 30 30 32 31
05. (TCF TRANSMITTED)			00 07 A6 00
06. CFR	(0)		
07. (FAX TRANSMITTED)			
08. MFS	(1)	10 04 00 00	
09. (T4 TIMEOUT)			
0A. MFS	(1)	10 04 00 00	
0B. RTP	(0)	10 04 00 00	
0C. DCS	(1)	04 00 00 00	00 07 A6 00
0D. (TCF TRANSMITTED)			
0E. CFR	(0)	04 02 00 00	
0F. (FAX TRANSMITTED)			
10. EDM	(1)	10 01 00 00	
11. (T4 TIMEOUT)			
12. EDM	(1)	10 01 00 00	
13.	MCF	(0)	02 00 00 00
14.	NSF	(0)	02 00 00 00
15.	DIS	(0)	02 00 00 00
16. DTC	(1)	00 00 02 10	00 07 E4 00
17.	DCS	(0)	00 00 02 01
18. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001634)			00 06 94 00
19. CFR	(1)	00 00 04 04	
1A. (FAX RECEIVED)			
1B.	EDM	(0)	00 00 08 02
1C. MCF	(1)	00 00 20 00	
1D. (T2 TIMEOUT)			

LM

TESTER	UNIT	STATUS	FIF
01.	MSF	(0)	02 00 00 00
02.	BIS	(0)	02 00 00 00
03.	C18 (1)		18 4F E4 00
04.	DCS (1)		31 32 33 34 35 36 37 38 39 30 30 39 38 37 36 35 34 33 32 31
05.	(TCF TRANSMITTED)		00 07 A6 00
06.	CFR	(0)	04 02 00 00
07.	(FAX TRANSMITTED)		
08.	MP8 (1)		10 04 00 00
09.	(T4 TIMEOUT)		
0A.	MP8 (1)		10 04 00 00
0B.	RIP	(0)	10 04 00 00
0C.	DCS (1)		10 04 00 00
0D.	(TCF TRANSMITTED)		00 07 A6 00
0E.	CFR	(0)	04 02 00 00
0F.	(FAX TRANSMITTED)		
10.	EOM (1)		10 01 00 00
11.	(T4 TIMEOUT)		
12.	EOM (1)		10 01 00 00
13.	MCF	(0)	10 01 00 00
14.	MSF	(0)	02 00 00 00
15.	BIS	(0)	02 00 00 00
16.	DTC (1)		02 00 00 00
17.	DCS	(0)	00 00 02 01
18.	(TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001634)		00 00 02 01
19.	CFR	(1)	00 00 04 04
1A.	(FAX RECEIVED)		
1B.	EOM	(0)	00 00 08 02
1C.	MCF (1)		00 00 20 00
1D.	(T2 TIMEOUT)		
1E.	MSF (1)		00 00 02 01
1F.	BIS (1)		00 00 02 01
20.	DCS	(1)	00 00 02 01
21.	(TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001640)		00 00 02 01
22.	CFR	(0)	00 00 04 04
23.	(FAX RECEIVED)		
24.	EOM	(1)	00 00 08 02
25.	MCF (0)		00 00 20 00
26.	(T2 TIMEOUT)		
27.	BIS (1)		00 00 02 01
28.	NSC	(1)	00 00 02 01
29.	DTC	(1)	00 00 02 01
2A.	DCM (0)		00 00 80 00
2B.	(END TEST)		

CP13

13 OPTIONAL FRAMES:

MSF.CSI.C10

NONE

>BT09

TEST:
01 OPERATING METHOD: 09
02 CALLING UNIT: 41 / AUTO-AUTO
03 DOCUMENT EXCHANGE: DUT
04 PAGES / DOCUMENT: NO
05 DOCUMENT ORIGINATOR: 1
06 ERRORS: 40
07 ERRORS: 00
08 ERRORS: 00
09 COMPRESSION CODE: HUFFMAN
10 MIN SCAN LINE TIME: 10/5 MS
11 VERT RESOLUTION: 3.85 LI/MM
12 MAX PAPER WIDTH: 297 MM (2432 PELS)
13 MAX PAPER LENGTH: 364 MM
14 DATA SIGNALING RATE: 9600 BPS
15 PREAMBLE DURATION: 1.14 SEC
16 TX TEST DOCUMENT: 02
17 TCF/FAXIN RESPONSE: CFR/MCF
18 TX BIT RATE FALLBACK: ENABLED
19 13 OPTIONAL FRAMES: NONE
20 EXTENDED FIF: YES (4 BYTES)
21 AUTO TEST ERRORS: ENABLED

>RU

TEST RUNNING

BURKOWSKI DEX 5100

09	TEST!	09	4T / AUTO-AUTO
01	OPERATING METHOD!	4T	UNIT
02	CALLING UNIT!	NO	1
03	DOCUMENT EXCHANGE!	TESTER	40
04	PAGES / DOCUMENT!	00	00
05	DOCUMENT ORIGINATOR!	00	HUFFMAN
06	ERRORS!	10/5 MS	3.85 L1/MM
07	ERRORS2!	297 MM (2432 PAGES)	364 MM
08	ERRORS3!	9600 BPS	1.14 SEC
09	COMPRESSION CODE!	CFR/MCF	ENABLED
0A	MIN SCAN LINE TIME!	NONE	YES (4 BYTES)
0B	VERT RESOLUTION!		ENABLED
0C	MAX PAPER WIDTH!		
0D	MAX PAPER LENGTH!		
0E	DATA SIGNALING RATE!		
0F	OF PREAMBLE DURATION!		
10	TX TEST DOCUMENT!		
11	ICF/FAXIN RESPONSE!		
12	TX BIT RATE FALLBACK!		
13	OPTIONAL FRAMES!		
14	EXTENDED FIF!		
15	AUTO TEST ERRORS!		

TESTER	WUT	STATUS	FIF
01.	(T.C. DIS NOT SENT, MEASURE T1)		
02.	(TIMEOUT (MS) = 047348)		
03.	(END TEST)		

8704

```

TEST:
01 OPERATING METHOD: 0A AUTO-AUTO
02 CALLING UNIT: UUT
03 DOCUMENT EXCHANGE: NO
04 PAGES / DOCUMENT: 1
05 DOCUMENT ORIGINATOR: TESTER
06 ERRORS1: 00
07 ERRORS2: 00
08 ERRORS3: 00
09 COMPRESSION CODE: HUFFMAN
0A MIN SCAM LINE TIME: 10/5 MS
0B VERT RESOLUTION: 3.85 LI/MM
0C MAX PAPER WIDTH: 297 MM (2432 PELS)
0D MAX PAPER LENGTH: 364 MM
0E DATA SIGNALING RATE: 9600 BP3
0F PREAMBLE DURATION: 1.14 SEC
10 TX TEST DOCUMENT: 02
11 TCF/FAXIN RESPONSE: CFR/MCF
12 TX BIT RATE FALLBACK: ENABLED
13 OPTIONAL FRAMES: NONE
14 EXTENDED FIF: YES (4 BYTES)
15 AUTO TEST ERRORS: ENABLED

```

>RU

TEST RUNNING

AD

BURROUGHS BEX 5100

(HALF DUPLEX CONFIGURATION)

8 JULY 1982

TEST:
 01 OPERATING METHOD:
 02 CALLING UNIT:
 03 DOCUMENT EXCHANGE:
 04 PAGES / DOCUMENT:
 05 DOCUMENT ORIGINATOR:
 06 ERROR81:
 07 ERROR82:
 08 ERROR83:
 09 COMPRESSION CODE:
 0A MIN SCAN TIME:
 0B VERT RESOLUTION:
 0C MAX PAPER WIDTH:
 0D MAX PAPER LENGTH:
 0E DATA SIGNALING RATE:
 0F PREAMBLE DURATION:
 10 TX TEST DOCUMENT:
 11 TCF/FAXIN RESPONSE:
 12 TX BIT RATE FALLBACK:
 13 OPTIONAL FRAMES:
 14 EXTENDED FIF:
 15 AUTO TEST ERROR81:

0A 4T 1 AUTO-AUTO
 UUT
 MU
 1 TESTER
 00
 00
 00
 HUFFMAN
 10/5 MS
 3.85 LI/MM
 297 MM (2432 PELS)
 364 MM
 9600 BPS
 1.14 SEC
 02
 CFR/MCF
 ENABLED
 NONE
 YES (4 BYTES)
 ENABLED

TESTER	UUT	STATUS	FIF
01. CFR (1)		00 00 02 01	
02. (T4 TIMEOUT)		00 00 02 00	
03. CFR (1)		00 00 02 00	
04. (T4 TIMEOUT)		00 00 02 00	
05. CFR (1)		00 00 02 00	
06. (T4 TIMEOUT)		00 00 02 00	
07. CFR (1)		00 00 02 00	
08. DCM (1)		00 00 02 01	
09. (END TEST)			

8 JULY 1982

BURROUGHS DEX 5100 (HALF DUPLEX CONFIGURATION)

TEST:
 01 OPERATING METHOD: 01
 02 CALLING UNIT: 11, MNL-MNL
 03 DOCUMENT EXCHANGE: UNIT
 04 PAGES / DOCUMENT: NO
 05 DOCUMENT ORIGINATOR: 1
 06 ERROR: UNIT
 07 ERROR: 00
 08 ERROR: 01
 09 ERROR: 00
 10 COMPRESSION CODE: MODIFIED READ
 11 MIN SCAN LINE TIME: 10/5 MS
 12 VERT RESOLUTION: 7.70 LI/MM
 13 MAX PAPER WIDTH: 216 MM (1.728 PELS)
 14 MAX PAPER LENGTH: 364 MM
 15 DATA SIGNALING RATE: 9600 BPS
 16 PREAMBLE DURATION: 1.14 SEC
 17 TX TEST DOCUMENT: LAST RECEIVED
 18 TCF/FAXIN RESPONSE: CFR/MCF
 19 TX BIT RATE FALLBACK: ENABLED
 20 OPTIONAL FRAMES: NONE
 21 EXTENDED FIF: NO (3 BYTES)
 22 AUTO TEST ERRORS: DISABLED

TESTER	UNIT	STATUS	FIF
01. DIS (1)		00 00 02 01	00 CF 64
02. (14 TIMEOUT)			
03. DIS (1)		00 00 02 00	00 CF 64
04. DCS (1)		00 00 02 01	00 C6 14
05. (TCF RCVD, NOT ALL ZEROS, DURATION (MS)=001914)			
06. CFR (0)		00 00 04 04	
07. (FAX RECEIVED)			
08. EOP (1)		00 00 08 02	
09. MCF (0)		00 00 20 00	
0A. DCM (1)		00 00 08 04	
0B. (END TEST)			

8 JULY 1982

(HALF DUPLEX CONFIGURATION)

BURROUGHS DEX 5100

TEST1
01 OPERATING METHOD:
02 CALLING UNIT:
03 DOCUMENT EXCHANGE:
04 PAGES / DOCUMENT:
05 DOCUMENT ORIGINATOR:
06 ERROR81:
07 ERROR82:
08 ERROR83:
09 COMPRESSION CODE:
10 MIN SCAN LINE TIME:
11 VERT RESOLUTION:
12 MAX PAPER WIDTH:
13 MAX PAPER LENGTH:
14 DATA SIGNALING RATE:
15 PREAMBLE DURATION:
16 TX TEST DOCUMENT:
17 TCF/FAXIN RESPONSE:
18 TX BIT RATE FALLBACK:
19 OPTIONAL FRAMES:
20 EXTENDED FIF:
21 AUTO TEST ERRORS:

02 27 J MML-AUTO
TESTER
NO
1
TESTER
00
02
00
MODIFIED READ
10/5 MS
7.70 LI/MM
216 MM (1728 PELS)
364 MM
9600 BPS
1.14 SEC
LAST RECEIVED
CFR/MCF
ENABLED
NONE
NO (3 BYTES)
DISABLED

A-48

TESTER	UNIT	STATUS	FIF
01.	NSF	(0)	00 00 00 00
02.	DIB	(0)	00 00 00 00
03.	DCS (1)	(0)	00 CE 38
04.	(TCF TRANSMITTED)	(0)	00 C7 14
05.	(FAX TRANSMITTED)	(0)	04 02 00 00
06.	(FAX TRANSMITTED)	(0)	04 02 00 00
07.	EDP (1)	(0)	10 02 00 00
08.	(T4 TIMEOUT)	(0)	10 02 00 00
09.	EDP (1)	(0)	10 02 00 00
10.	DCS (1)	(0)	10 02 00 00
11.	(TCF TRANSMITTED)	(0)	04 00 00 00
12.	CFR	(0)	04 02 00 00
13.	(FAX TRANSMITTED)	(0)	10 02 00 00
14.	EDP (1)	(0)	10 02 00 00
15.	(T4 TIMEOUT)	(0)	10 02 00 00
16.	EDP (1)	(0)	10 02 00 00
17.	DCM (1)	(0)	10 02 00 00
18.	(END TEST)	(0)	00 00 00 00

LMEI
-8